



FLOOR

# QUARTETTO™

GLAZED PORCELAIN with REVEAL IMAGING®

 **daltile**®  
IMAGINE WHAT'S POSSIBLE™



Cover photo features Quartetto™ Cool Circolo 8 x 8 and Basalto 8 x 8 on the floor with Brickwork™ Alcove 2 x 8 paver tile on the wall. Above photo features Quartetto™ Cool Grande Fiore 8 x 8 and Cobalto 8 x 8 on the floor with Cool Piazza 8 x 8 on the wall.

## Confident Creativity

Create your own work of art with Quartetto™. The look of handmade, encaustic tile in an 8 x 8 porcelain offers eight selections of decorative patterns in both warm and cool palettes, giving you design freedom to make a space your own. Repeat a single decorative tile for a uniform pattern design or group multiple patterns with any of the eight solid colors to create unique combinations. Quartetto delivers flawless design options so you can decide just how much drama you want in your space.

- **FREEDOM AND FLEXIBILITY**

- 8 x 8 floor tile available in 24 unique colors and patterns
- Eight decorative accents available in both warm and cool tones
- Eight solid colors coordinate with decorative tile

- **MAKE IT YOUR OWN**

- Recurring single decorative tile design achieves a uniform pattern
- Combine different decorative tile designs with solids to create unique spaces



**PRE-CONSUMER RECYCLED MATERIALS**



**REVEAL IMAGING®**

All or select items within this series meet the requirements for these qualifications. For more information visit [daltille.com](http://daltille.com).

### USAGE

Floors

Walls

Countertops

F

W

C

CERTIFIED  
**PORCELAIN**  
TILE  
0.5% or less water absorption


FLOOR TILE – SOLIDS



TALCO QU01



AMBRA QU02



POMICE QU03



OCRA QU07



TERRA QU04



BASALTO QU06



CADMIO QU08



COBALTO QU05


FLOOR TILE – DECORATIVE



WARM ROMBO QU09



COOL ROMBO QU17



WARM SOLÉ QU10



COOL SOLÉ QU18



WARM FIGURA QU11



COOL FIGURA QU19



WARM GRANDE FIORE QU12



COOL GRANDE FIORE QU20



WARM CIRCOLO QU13



COOL CIRCOLO QU21



WARM PICCOLO FIORE QU14



COOL PICCOLO FIORE QU22



WARM PÉTALO QU15



COOL PÉTALO QU23



WARM PIAZZA QU16



COOL PIAZZA QU24

FLOOR

# QUARTETTO™

GLAZED PORCELAIN with REVEAL IMAGING®

## DESIGN IDEAS



WARM CIRCOLO QU13



COOL SOLÉ QU18




RANDOM WARM DECOS



RANDOM COOL DECOS



WARM PIAZZA QU16

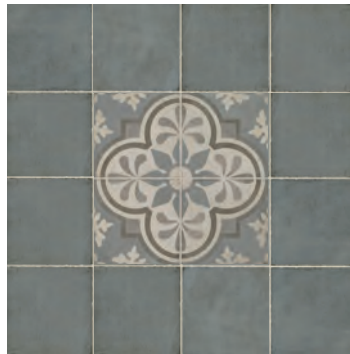

COOL GRANDE FIORE QU20  
WITH COBALTO QU05



WARM PICCOLO FIORE QU14  
WITH AMBRA QU02



COOL PÉTALO QU23  
WITH BASALTO QU06

# QUARTETTO™

GLAZED PORCELAIN with REVEAL IMAGING®

## SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	8 x 8 Floor Tile	(7-7/8" x 7-7/8") (20.00 cm x 20.00 cm)	3/8"	10.32	24
	8 x 8 Decorative Floor Tile	(7-7/8" x 7-7/8") (20.00 cm x 20.00 cm)	3/8"	N/A	24

## APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).

### APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

## INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16"	 Medium (V2)

## PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](http://daltile.com/Factors).

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Use of a latex modified thin-set is recommended for installation. For more information, visit [daltile.com](http://daltile.com).



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit [daltilegreenworks.com](http://daltilegreenworks.com).

7834 C.F. Hawn Freeway,  
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).



IMAGINE WHAT'S POSSIBLE™

©2018 Daltile (2/18)