



CONCRETE LOOK

QUARTETTO™
COLORBODY™ PORCELAIN



 **dalTile**®
IMAGINE WHAT'S POSSIBLE™

QUARTETTO™

COLORBODY™ PORCELAIN

Confident Creativity

Create your own work of art with Quartetto™. The look of handmade, encaustic tile in an 8 x 8 porcelain offers eight selections of decorative patterns in both warm and cool palettes, giving you design freedom to make a space your own. Repeat a single decorative tile for a uniform pattern design or group multiple patterns with any of the eight solid colors to create unique combinations. Quartetto delivers flawless design options so you can decide just how much drama you want in your space.

- FREEDOM AND FLEXIBILITY
 - 8 x 8 floor tile available in 24 unique colors and patterns
 - Eight decorative accents available in both warm and cool tones
 - Eight solid colors coordinate with decorative tile
- MAKE IT YOUR OWN
 - Recurring single decorative tile design achieves a uniform pattern
 - Combine different decorative tile designs with solids to create unique spaces

CONCRETE LOOK

USAGE



SPECIAL FEATURES

Cover photo features Quartetto™ Cool Grand Fiore 8 x 8 on the backsplash wall, Panoramic Porcelain Surfaces Elemental Selection™ Calacatta on the island and Season Wood™ Winter Spruce 24 x 48 on the floor.

Above photo features Quartetto™ Cool Piazza 8 x 8 on the floor, Terra 8 x 8 on the floor border and Basalto 8 x 8 on the outer floor border.

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES:

- 8 x 8 Floor Tile
- 8 x 8 Decorative Floor Tile

FINISHES: MATTE

COLOR PALETTE




FLOOR TILE – SOLIDS



TALCO QU01 AMBRA QU02 POMICE QU03 OCRA QU07 TERRA QU04 BASALTO QU06 CADMIO QU08 COBALTO QU05

FLOOR TILE – DECORATIVE

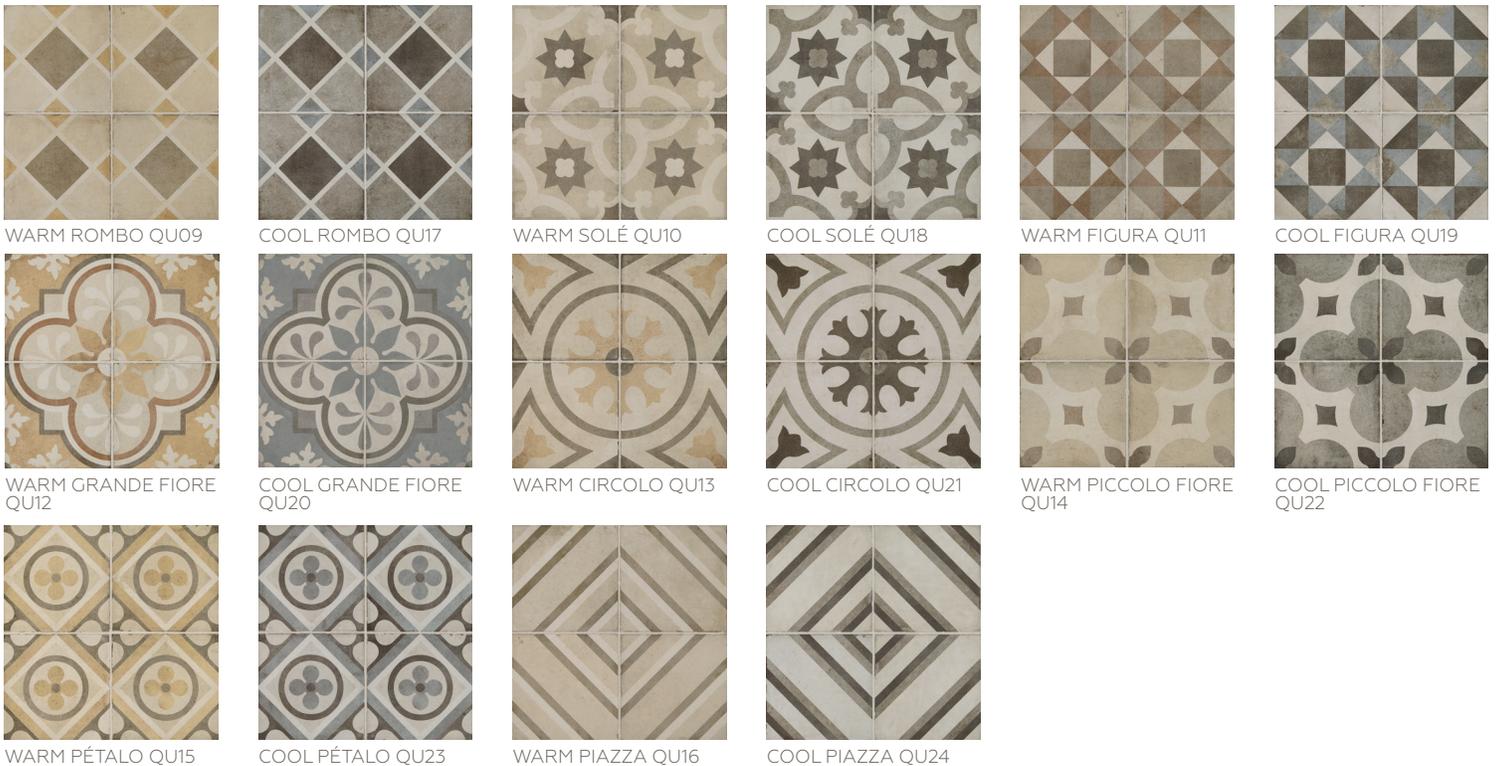

WARM ROMBO QU09 COOL ROMBO QU17 WARM SOLÉ QU10 COOL SOLÉ QU18 WARM FIGURA QU11 COOL FIGURA QU19
 WARM GRANDE FIORE QU12 COOL GRANDE FIORE QU20 WARM CIRCOLO QU13 COOL CIRCOLO QU21 WARM PICCOLO FIORE QU14 COOL PICCOLO FIORE QU22
 WARM PÉTALO QU15 COOL PÉTALO QU23 WARM PIAZZA QU16 COOL PIAZZA QU24



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

QUARTETTO™

COLORBODY™ PORCELAIN

CONCRETE LOOK

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	8 x 8 Floor Tile	(7-7/8" x 7-7/8") (20.00 cm x 20.00 cm)	3/8"	10.32	24
	8 x 8 Decorative Floor Tile	(7-7/8" x 7-7/8") (20.00 cm x 20.00 cm)	3/8"	N/A	24

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16"	 Medium (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Use of a latex modified thin-set is recommended for installation. For more information, visit daltile.com.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.



LEARN MORE

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltile® products and information,
visit our website at daltile.com.



©2022 Daltile (2/22)