

FLOOR

GEOMETRIC FUSION™

COLORBODY™ PORCELAIN





Geometry, Deconstructed

Welcome the glamorous world of metallics with Geometric Fusion™. This chic collection offers nine patterns designed to be installed randomly, which creates an intentional deconstructed geometric look. Each tile features a decorative blend of metallic, matte and glossy finishes enhanced by EverLux™ Sync technology. Geometric Fusion's four popular metallic colors are perfect for adding excitement to a monochromatic space.

DAZZLING METALLICS

- Features a geometric blend of metallic, matte and glossy finishes synchronized through EverLux™ Sync technology with subtle textures
- Stunning black and brilliant white designs as well as metallic bronze and silver hues

STYLISH INSTALLATION

- Offered in nine 8 x 8 geometric patterns, this ColorBody™ porcelain tile is designed to be installed on floors and walls in a random, non-contiguous arrangement
- Boldly delivers visual interest to minimalistic, monochromatic spaces
- TruEdge™ delivers a seamless installation with smaller grout joints



PRE-CONSUMER RECYCLED MATERIALS



TRU-EDGE™

All or select items within this series meet the requirements for these qualifications. For more information visit daltile.com.



USAGE

Floors Walls Countertops

F W


GEOMETRIC FUSION™

COLORBODY™ PORCELAIN


FLOOR TILE



PEARL GF01

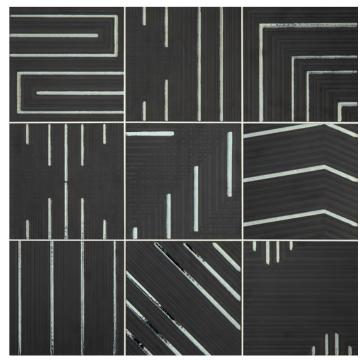

OBSIDIAN GF02

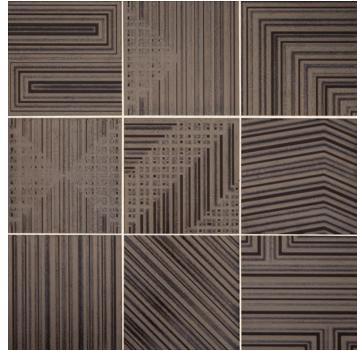

AMBER GF04



GRAPHITE GF03

GEOMETRIC FUSION™

COLORBODY™ PORCELAIN

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
8 x 8 Floor Tile	(7-3/4" x 7-3/4") (19.65 cm x 19.65 cm)	3/8"	N/A	9

Product is available only in pre-boxed sets of nine patterns. Individual patterns are not sold separately.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	~
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	~
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest $^{"}$, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	Medium (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile. com/Factors.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



