



STONE LOOK

FLOOR

ASSEMBLE™

STONE ATTACHÉ™ COLLECTION – COLORBODY™ PORCELAIN

 **daltile®**
IMAGINE WHAT'S POSSIBLE™

FLOOR

ASSEMBLE™

STONE ATTACHÉ™ COLLECTION – COLORBODY™ PORCELAIN

Gather Up Glamour

With Assemble™, every piece comes together to create the perfect design. This collection is comprised of stone-looks that construct unique visuals. Offered in large-format sizes and grey tones, Assemble provides a contemporary and modern expression to your space.

• DIMENSIONAL DEPTH

- This unique look combines terrazzo and agglomerated visual to the beauty of Natural Stone
- Floor tile offered in two different finishes

• SEAMLESS DESIGN

- Large-format sizes in 30 x 60 and 30 x 30 generate an uninterrupted look
- Coordinating 2 cm paver tiles in a 32 x 32 size integrate the indoors with the outdoors

STONE LOOK

USAGE



SPECIAL FEATURES

SEE CHARTS FOR FULL PRODUCT DETAILS

Cover photo features Assemble™ Emissary 30 x 30 on the floor.
Above photo features Assemble™ Magistrate 30 x 30 on the floor.

SIZES:



30 x 60
Floor Tile



32 x 32
Paver Tile



30 x 30
Floor Tile




12 x 24
Floor Tile



2 x 2 Mosaic
(Mesh-Mounted)

FINISHES: MATTE

COLOR PALETTE



PROXY




MAGISTRATE



EMISSARY


FLOOR TILE

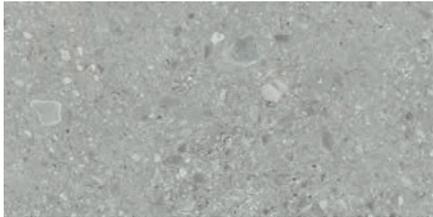

PROXY AS10



MAGISTRATE AS11

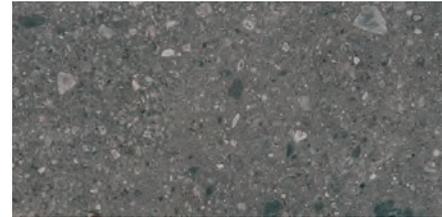

EMISSARY AS12


2CM FLOOR TILE - TEXTURED



PROXY AS10




MAGISTRATE AS11

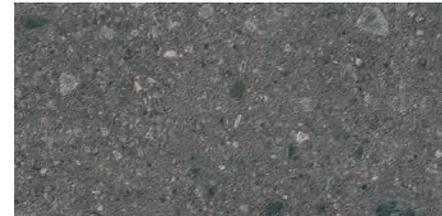

EMISSARY AS12


2 x 2 MOSAIC



PROXY AS10



MAGISTRATE AS11



EMISSARY AS12



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT™
*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT™
*Not Applicable to Mesh-Mounted Mosaics



CLIMATEPRO™



SIMPLICLEAN™

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	30 x 60 Floor Tile	(29-1/2" x 59-1/16") (74.90 cm x 150.00 cm)	7/16"	24.22	2
	32 x 32 Paver Tile	(31-5/16" x 31-5/16") (79.50 cm x 79.50 cm)	13/16" (2 cm)	6.89	1
	30 x 30 Floor Tile	(29-3/8" x 29-3/8") (74.50 cm x 74.50 cm)	3/8"	12.12	2
	12 x 24 Floor Tile	(11-11/16" x 23-7/16") (29.65 cm x 59.50 cm)	3/8"	11.64	6
	2 x 2 Mosaic (Mesh-Mounted)	(11-11/16" x 11-11/16" Sheet) (29.65 cm x 29.65 cm Sheet)	3/8"	3.88	4

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓*
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	✓**
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓*

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A1371-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

* Mosaic tile only

** 2 cm only

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 Random (V4)
Mosaic: 1/8"	

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 0.5%
Breaking Strength	C648	> 275 lbs > 1000 lbs (2cm)	> 275 lbs
Scratch Hardness	MOHS	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant
Abrasion Resistance	C1027	N/A	N/A

For additional information on test results, visit us at: daltille.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A1371 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltille.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A1371 section 6.2.2.1.10, available at www.tileusa.com.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



All or select items within this series meet the requirements for these qualifications. For more product information, visit daltille.com.