



WALL

WALL

MYTHOLOGY™

GLAZED CERAMIC WALL TILE & MOSAIC



 daltile®
IMAGINE WHAT'S POSSIBLE™

WALL

MYTHOLOGY™

GLAZED CERAMIC WALL TILE & MOSAIC

Mediterranean Soul

Experience Mediterranean essence with the Mythology™ collection – featuring styles and characteristics sure to stir your soul. As dramatic as it is chic in the detailing, rich natural earth tones and textures with handmade look punches are the foundation of Mythology™. With curvaceous 6-inch arabesque shapes plus 4 x 12 tiles & Picket Mosaic options, embody the warmth and serenity of the Mediterranean islands.

• CHARMING PANACHE

- Unique handmade look detailing
- Offered in seven earth inspired colorways
- Perfect for any relaxed style design residentially & commercially

• SUPPLE CREATIVITY

- Shapes include 4 x 12 rectangles, 6-inch Arabesque tiles and a Picket Mosaic
- Coordinating jolly accents available for a finishing touch
- All colors available in an undulated or all new wave crest structure plus the Arabesque wall tile and Picket Mosaic options

WALL

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



GLAZED CERAMIC



LOW HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

SPECIAL FEATURES

Cover photo features Mythology™ Titan 4 x 12 wave crest on the wall and Portfolio Confetti™ Ash Grey 12 x 24 on the floor. Above photo features Mythology™ Santorini Arabesque on the wall and Vertuo™ Bravura 8 x 48 on the floor.

SIZES:



FINISHES: GLOSSY

WALL TILE – UNDULATED



SANTORINI MY90

OLYMPUS MY91

HARMONIA MY92

CHRONOS MY93



CYCLADE MY94

AURA MY95

TITAN MY96

WALL TILE – WAVE CREST



SANTORINI MY90

OLYMPUS MY91

HARMONIA MY92

CHRONOS MY93




CYCLADE MY94

AURA MY95

TITAN MY96

WALL TILE – ARABESQUE

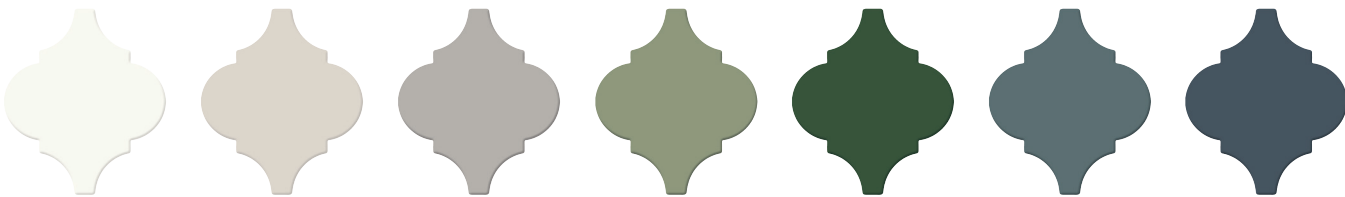

SANTORINI MY90

OLYMPUS MY91

HARMONIA MY92


CHRONOS MY93

CYCLADE MY94

AURA MY95

TITAN MY96

PICKET MOSAIC – UNDULATED

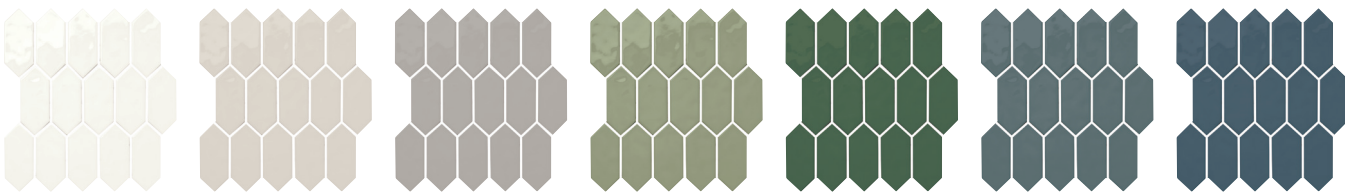

SANTORINI MY90

OLYMPUS MY91

HARMONIA MY92

CHRONOS MY93

CYCLADE MY94

AURA MY95

TITAN MY96



WATERPROOF



STAINPROOF



DENTPROOF



FIRE-RESISTANT™
*Not Applicable to Mesh-Mounted Mosaics



CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	4 x 12 Wall Tile Undulated	(4-1/4" x 12-7/8") (10.91 cm x 32.77 cm)	5/16"	10.64	28
	4 x 12 Wall Tile Wave Crest	(4-1/4" x 12-7/8") (10.91 cm x 32.77 cm)	3/8"	8.36	22
	6" Arabesque	(5-1/4" x 6") (13.33 cm x 15.24 cm)	5/16"	10.80	90
	2 x 5 Picket Mosaic	(12-1/4" x 11-1/8" Sheet) (31.12 cm x 27.94 cm Sheet) Dot-mounted	1/4"	8.76	12

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	✓*


A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Wall tile and mosaic are suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

* Mosaics only

TRIM

Type	Number	Size	Pieces/ Carton
 12" Jolly	S-1/212J	1/2 x 12	12

INSTALLATION

Grout Joint Recommendation

Shade Variation

Wall (4 x 12 Undulated): 1/16" (1/8" when installed in a staggered brick-joint pattern; overlap should not exceed 33%.)

Wall (4 x 12 Wave Crest): 1/16" (Straight Joint Installation only)

6" Arabesque: 1/16"

Mosaic: 1/8"



PERFORMANCE CHARACTERISTICS

	ASTM#	Wall Result	Mosaic Result
Water Absorption	C373	< 20.0%	< 3.0%
Breaking Strength	C648	120-230 lbs	250 lbs
Scratch Hardness	MOHS	4.0-6.0	4.0-6.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



POST-CONSUMER
RECYCLED MATERIALS



PRE-CONSUMER
RECYCLED MATERIALS

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.