



CONCRETE LOOK

FLOOR | WALL
SECTOR™
COLORBODY™ PORCELAIN

FLOOR | WALL

SECTOR™

COLORBODY™ PORCELAIN

Urban Transformation

Rhythmic design and cool concrete tones are the foundations of Sector™, developed by Daltile® in collaboration with Gensler, serving as product design consultant. Add distinctive visual and textural interest to your space with this unique system featuring three structures mixed to create high, medium or low pattern effects.

STRUCTURES AVAILABLE

The Sector Collection features five versatile colors with small geometric elements in three graduating structure designs that create varying depth and texture. Take full control of your design by using one structure on it's own or by mixing structure patterns for a truly customized look.

- **MATRIX STRUCTURE**
 - High amount of dynamic texture
 - Differing depths of texture
- **FACTION STRUCTURE**
 - Medium level of dynamic texture
 - Minimal depth differences for simpler design
- **AERIAL STRUCTURE**
 - Low level of dynamic texture
 - Minimal depth change for simpler design

Cover photo features Sector™ Iron Matrix on the floor and wall.
Above photo features Sector™ Element Matrix/Faction/Aerial mixed on the wall and Flat™ Limestone on the floor.

CONCRETE LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



PC
COLORBODY
PORCELAIN

LOW HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

SPECIAL FEATURES

SIZES:



FINISHES: MATTE

SECTOR™ – COLORBODY™ PORCELAIN TILE

MATRIX




ELEMENT MATRIX SC20




LIMESTONE MATRIX SC21



CINDER MATRIX SC22

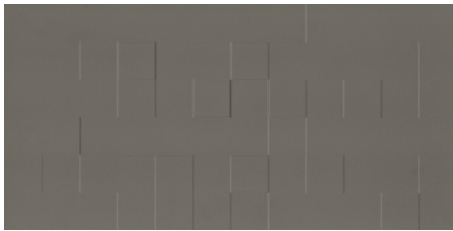

IRON MATRIX SC23

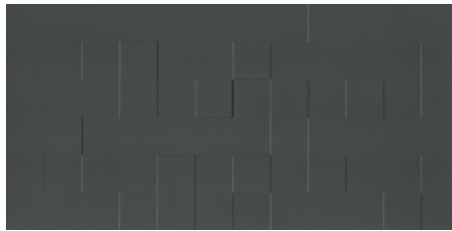

SLATE MATRIX SC24

FACTION



ELEMENT FACTION SC15




LIMESTONE FACTION SC16



CINDER FACTION SC17



IRON FACTION SC18



SLATE FACTION SC19

AERIAL



ELEMENT AERIAL SC10



LIMESTONE AERIAL SC11



CINDER AERIAL SC12




IRON AERIAL SC13




SLATE AERIAL SC14


COORDINATING FLAT™ SERIES – COLORBODY™ PORCELAIN TILE



ELEMENT FL30



LIMESTONE FL31



CINDER FL33



IRON FL36



SLATE FL38



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT




CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	12 x 24 Floor/Wall Tile	(11-13/16" x 23-5/8") (30.00 cm x 60.00 cm)	5/16"	11.63	6

APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 Medium (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Product Design Consultant **Gensler**



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.



©2020 Daltile (5/20)