

MY CITY COLORBODY" PORCELAIN




MY CITY

MY CITY" BY DALTILE® EXPRESSES METROPOLITAN ENERGY AND MOBILITY WITH PATTERNS INSPIRED BY THE TRANSIT SYSTEMS OF THREE OF THE MOST DYNAMIC CITIES IN THE WORLD: NEW YORK, LONDON AND SHANGHAI. DEVELOPED IN COLLABORATION WITH GENSLER, SERVING AS PRODUCT DESIGN CONSULTANT, THIS CUTTING EDGE PORCELAIN TILE COLLECTION OFFERS A CONCRETE LOOK IN COOL AND WARM NEUTRALS WITH GLOSS, METALLIC, OR MATTE FINISH LINEWORK. ALSO AVAILABLE ARE UNPATTERNED FLAT® TILES TO COMPLEMENT YOUR LOOK AND EXPAND YOUR DESIGN OPPORTUNITIES.



NEW YORK



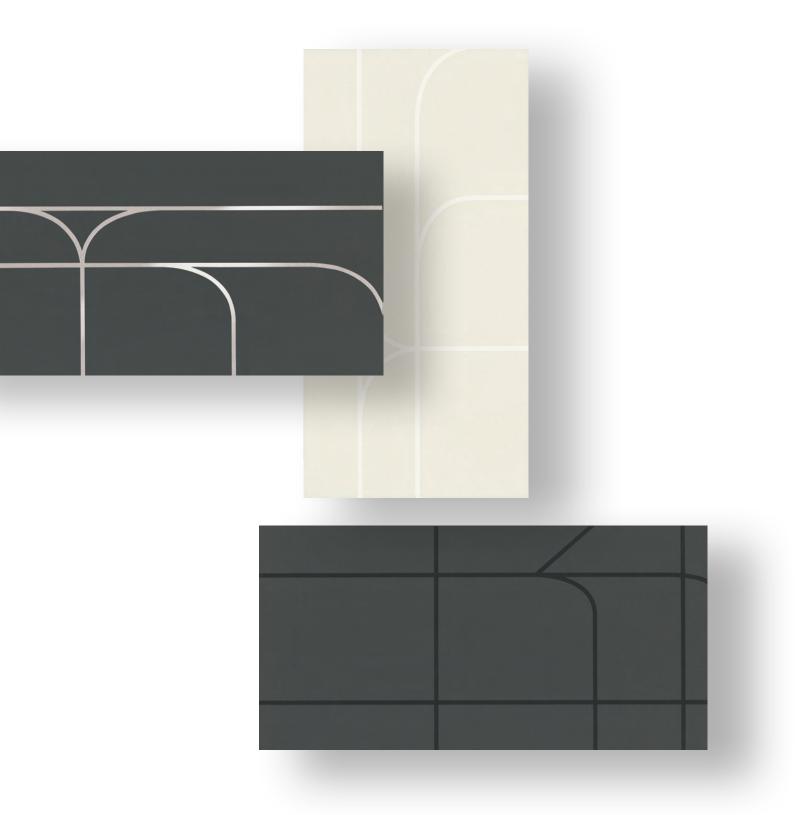

THE NEW YORK SERIES FEATURES GRID-LIKE LINES SOFTENED WITH FLUID CURVES – A STRIKING VISUAL METAPHOR FOR THE BIG APPLE'S VERVE AND VITALITY. OFFERED IN DARK AND LIGHT TONES THAT CONVEY THE CITY'S MANY CONTRASTS.



THE LONDON SERIES FEATURES THE COOL GRAYS OF THE CITY'S FAMOUS FOG, WITH ANGULAR LINEWORK INSPIRED BY ITS EQUALLY RENOWNED UNDERGROUND TRANSIT SYSTEM.

LONDON


SHANGHAI





THE SHANGHAI SERIES OFFERS A UNIQUE PATTERN OF LINEAR ANGLES, INFLUENCED BY ITS NAMESAKE'S INTERCITY METRO, AND EMBODIED IN A SERIES OF RICH, WARM NEUTRALS.














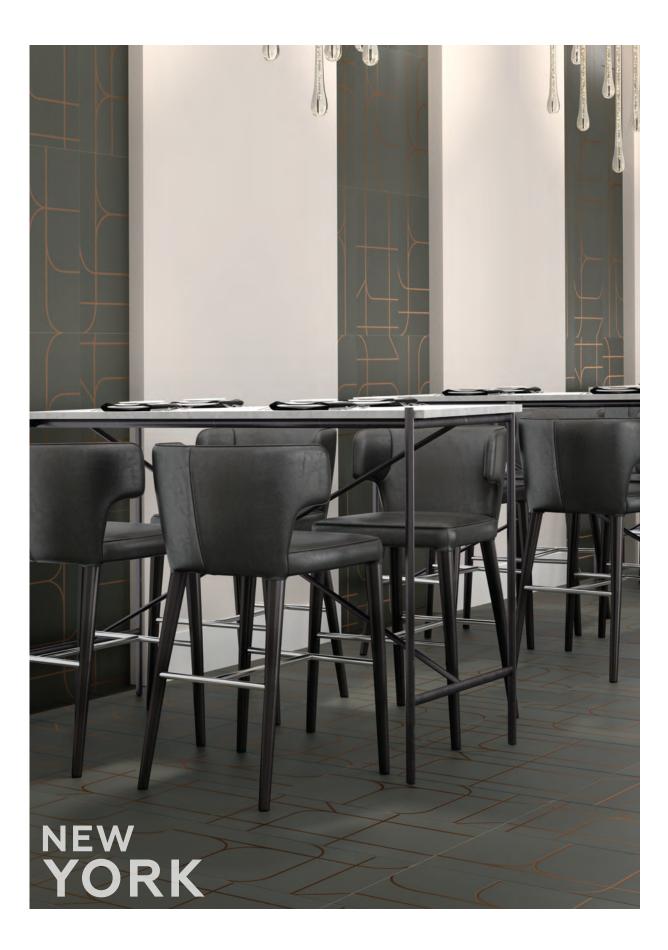
















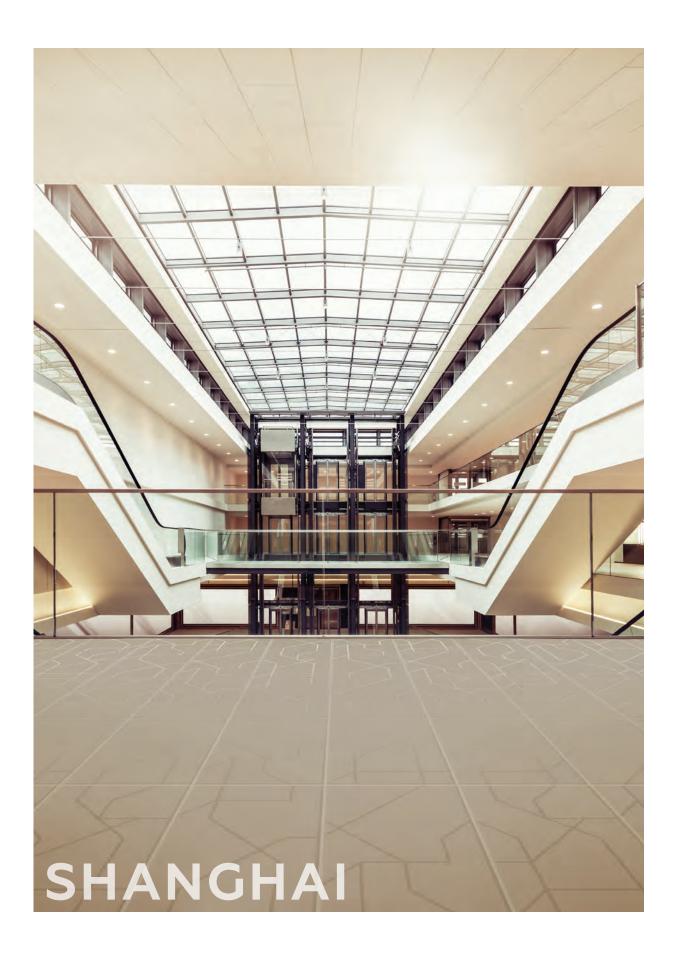



COLORBODY™ PORCELAIN FLOOR TILE

NEW YORK





WALL STREET ELEMENT NY06



MANHATTAN SLATE NY07



LEXINGTON SLATE NY08



ASTORIA SLATE NY09



MADISON SLATE NY10

LONDON



PICCADILLY CONCRETE LD15



CARNABY STEEL LD16



OXFORD IRON LD17



ABBEY SLATE LD18

SHANGHAI



TEMPLE LIMESTONE SH30



METRO CINDER SH31



PARAMOUNT BRICK SH32



DYNASTY RAIL SH33

































































		Thickness	Sq. Ft./ Carton	Pieces/ Carton
12 x 24 Floor Tile	(11-13/16" x 23-5/8") (30.00 cm x 60.00 cm)	5/16"	11.63	6

APPLICATIONS


711 1 210/110110		
	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	/
Countertops	N/A	✓
Pool Linings	N/A	
		Lance Control

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest $^{"}$, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.





All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

Product Design Consultant Gensler

INSTALLATION

Grout Joint Recommendation	Shade Variation	
----------------------------	-----------------	--

Floor: 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)



PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

SPECIFICATIONS



All product designs presented in this brochure copyright Gensler 2020.









Photo features New York Madison Slate on the inset walls and floor.