



MARBLE LOOK

PERPETUO™

COLORBODY™ AND GLAZED PORCELAIN FLOOR &
GLAZED CERAMIC WALL TILE AND MOSAIC

PERPETUO™

COLORBODY™ AND GLAZED PORCELAIN FLOOR & GLAZED CERAMIC WALL TILE AND MOSAIC

Supreme Splendor

Perpetuo™ delivers the everlasting beauty of marble veining in five neutral yet striking visuals. Design your entire living space with floor tile available in three traditional formats and an 8" hexagon, and wall tile available in multi-geometric, wave and flat structures. Completing this comprehensive collection are two stunning 8" hexagon decorative accents and a hexagon mosaic available in all five colors.

- ENDURING BEAUTY
 - Elegant marble veining available in five timeless colors
 - An 8" hexagon decorative accent impresses with a dynamic and versatile black and white duo
- COMPREHENSIVE SELECTION
 - Floor tile offered in rectified 24x24, 12x24, 12x12 in matte and polished finishes and 8" hexagon in a matte finish
 - Wall tile available in rectified 12x24 in flat, multi-geometric and wave structures, as well as 4x12 flat
 - Matte hexagon mosaic completes the look
 - Trim package includes 3x24 floor bullnose and jolly

MARBLE LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



PC
COLORBODY PORCELAIN



LOW HIGH

SPECIAL FEATURES

Cover photo features Perpetuo™ Timeless White 12 x 24 matte and 8" hexagon matte on the floor. Above photo features Perpetuo™ Brilliant White 12 x 24 flat and multi-geometric on the back wall, side walls and counter front, and Infinite Black 8" Hexagon on the floor.

SEE BOTTOM FOR FULL PRODUCT DETAILS

PERPETUO™

MARBLE LOOK

COLORBODY™ AND GLAZED PORCELAIN FLOOR & GLAZED CERAMIC WALL TILE AND MOSAIC


SIZES:




24 x 24 Floor Tile



12 x 24 Floor Tile




12 x 12 Floor Tile



8" Hexagon Floor Tile & Deco



12 x 24 Wall Tile (Flat, Wave, & Multi-Geometric)



4 x 12 Wall Tile



Hexagon Mosaic

FINISHES: MATTE | SATIN | POLISHED

COLOR PALETTE



BRILLIANT WHITE



TIMELESS WHITE



ELEGANT BEIGE



ETERNAL GREY



INFINITE BLACK

COLORBODY™ PORCELAIN FLOOR TILE



BRILLIANT WHITE PT21




TIMELESS WHITE PT20



ELEGANT BEIGE PT22



ETERNAL GREY PT23

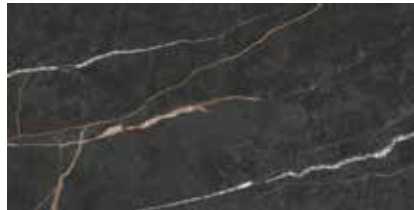


INFINITE BLACK PT24

GLAZED PORCELAIN 8" HEXAGON FLOOR TILE



BRILLIANT WHITE PT21



TIMELESS WHITE PT20



ELEGANT BEIGE PT22



ETERNAL GREY PT23



INFINITE BLACK PT24

GLAZED PORCELAIN 8" HEXAGON DECORATIVE ACCENT



TUXEDO PT26



BRIDAL PT25



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*



FIRE-RESISTANT*



CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

GLAZED CERAMIC WALL TILE – FLAT



BRILLIANT WHITE PT21



TIMELESS WHITE PT20



ELEGANT BEIGE PT22



ETERNAL GREY PT23

12 x 24 GLAZED CERAMIC WALL TILE – MULTI-GEOMETRIC



BRILLIANT WHITE PT21



TIMELESS WHITE PT20



ELEGANT BEIGE PT22



ETERNAL GREY PT23

12 x 24 GLAZED CERAMIC WALL TILE – WAVE



BRILLIANT WHITE PT21



TIMELESS WHITE PT20




ELEGANT BEIGE PT22



ETERNAL GREY PT23

1-1/2" GLAZED CERAMIC HEXAGON MOSAIC



BRILLIANT WHITE PT21



TIMELESS WHITE PT20



ELEGANT BEIGE PT22



ETERNAL GREY PT23













INFINITE BLACK PT24

PERPETUO™

COLORBODY™ AND GLAZED PORCELAIN FLOOR & GLAZED CERAMIC WALL TILE AND MOSAIC

MARBLE LOOK

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 24 Floor Tile [□]	(23-7/16" x 23-7/16") (59.44 cm x 59.44 cm)	5/16"	15.20	4
	12 x 24 Floor Tile [□]	(11-5/8" x 23-7/16") (29.56 cm x 59.44 cm)	5/16"	17.01	9
	12 x 12 Floor Tile [□]	(11-5/8" x 11-5/8") (29.56 cm x 29.56 cm)	5/16"	12.22	13
	8" Hexagon Floor Tile ^{♦♦}	(7-7/8" x 9-1/8") (20.04 cm x 23.16 cm)	5/16"	9.37	25
	8" Hexagon Decorative Accent ^{♦♦}	(7-7/8" x 9-1/8") (20.04 cm x 23.16 cm)	5/16"	9.37	25
	12 x 24 Flat Wall Tile ⁺	(11-3/4" x 23-3/4") (29.90 cm x 60.42 cm)	3/8"	15.52	8
	12 x 24 Wave Wall Tile ⁺	(11-3/4" x 23-3/4") (29.90 cm x 60.42 cm)	3/8"	15.52	8
	12 x 24 Multi-Geometric Wall Tile ⁺	(11-3/4" x 23-3/4") (29.90 cm x 60.42 cm)	3/8"	15.52	8
	4 x 12 Wall Tile ^{♦♦}	(4-1/4" x 12-7/8") (10.91 cm x 32.77 cm)	5/16"	10.64	28
	1-1/2" Hexagon Mosaic (Dot-mounted) ^{♦♦}	(11-3/8" x 10-1/4" Sheet) (28.89 cm x 26.04 cm Sheet)	1/4"	9.72	12

□ Available in Polished and Matte finishes only.

♦ Available in Matte finish only.

♦ Available in PT20, PT21, PT22 and PT23 only. Available in Satin finish only.

* Pressed tile, does not feature TruEdge™ Technology.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓ [†]
Wet & Level – Interior Floor	≥ 0.42	✓ ^{†*}
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓ ^{**}
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓ [†]
Pool Linings	N/A	✓ ^{**}

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Floor tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Wall and mosaic tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.



[†] Floor and Mosaic tile only. * Matte finish only. ** Mosaic tile only.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.



TRIM

	Type	Number	Size	Pieces/Carton
	Floor Bullnose	P43F9	3 x 24	10
	Jolly [*]	S1/212J	1/2 x 12	12

* Available in PT20, PT21, PT22 and PT23 only. Available in Satin finish only.

INSTALLATION

Grout Joint Recommendation

Shade Variation

Floor: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)

12 x 24 Wall: 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%.)



4 x 12 Wall: 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%.)

Mosaic: 1/8"

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 20.0%	< 3.0%
Breaking Strength	C648	> 275 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0 (Matte) 6.0 (Polished)	4.0 - 6.0	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltille.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltille® products and information,
visit our website at daltille.com.

