



WALL

PROTECTION THAT LIVES ON 
RIGID CLAY™ + MICROBAN®
GLAZED CERAMIC WALL TILE & MOSAIC with MICROBAN® TECHNOLOGY



 **dalTile®**
IMAGINE WHAT'S POSSIBLE™

RIGID CLAY™ + MICROBAN®

PROTECTION THAT LIVES ON

GLAZED CERAMIC WALL TILE & MOSAIC with MICROBAN® TECHNOLOGY

Beauty in Imperfection

Rigid Clay™ introduces impressive structural patterns in a 12x24 rectified wall tile providing organic depth to your design. Let natural imperfections transform your space with the subtlety of plateau wall tile or the etched patterns of layer, ridge and stream wall tile. Rigid Clay™ offers four, desert-inspired colors in four primal structures that draw you nearer to natural origins. Rigid Clay™ also features proprietary Microban® Technology offering a lifetime of built-in antimicrobial product protection that does not wash off or wear away.

• ORGANIC DEPTH

- Subtle imperfections connect you to nature
- 12x24 rectified wall tile in chiseled structures: Plateau, Layer, Stream and Ridge
- Coordinating 1x3 off-set mosaic available in all colors

• A LIFETIME OF CLEANLINESS

- With Microban® you can Worry Less and Live More with time to do more of what you enjoy in life
- Powerful 24/7 antimicrobial product protection technology that is always working
- Built-in antimicrobial protection to protect the product that will not wash off or wear away
- Guards product against bacterial odors and degradation from microbial causes

WALL

USAGE



SPECIAL FEATURES

Cover photo features Rigid Clay™ Rock 12 x 24 Ridge on the wall and Sleigh Creek™ Cabriolet 6 x 36 on the floor. Photo features Rigid Clay™ Brick 12x24 Stream on the wall and ONE Quartz Surfaces® Argos on the desk.

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES:



12 x 24
Wall Tile



1 x 3 Off-set
Mosaic

FINISHES: MATTE

COLOR PALETTE



SALT



DUNE



ROCK



BRICK


PLATEAU WALL TILE




SALT RC10



DUNE RC11



ROCK RC12

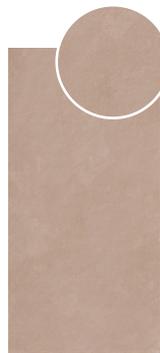

BRICK RC13

LAYER WALL TILE



SALT
RC10



DUNE
RC11



ROCK
RC12



BRICK
RC13

STREAM WALL TILE



SALT RC10



DUNE RC11



ROCK RC12



BRICK RC13

RIDGE WALL TILE



SALT
RC10



DUNE
RC11




ROCK
RC12




BRICK
RC13


1 x 3 OFF-SET MOSAIC




SALT RC10



DUNE RC11



ROCK RC12



BRICK RC13



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



SIMPLICLEAN™

RIGID CLAY™ + MICROBAN®

GLAZED CERAMIC WALL TILE & MOSAIC with MICROBAN® TECHNOLOGY

WALL

SIZES

| | | | Thickness | Sq. Ft./ Carton | Pieces/ Carton |
|--|---------------------------------------|--|-----------|--------------------|-------------------|
|  | 12 x 24 Wall Tile | (11-3/4" x 23-3/4") (29.90 cm x 60.42 cm) | 3/8" | 15.56 | 8 |
|  | 1 x 3 Off-set Mosaic (Dot-mounted) | (12-1/8 x 11-3/4 Sheet) (30.81 cm x 29.85 cm Sheet) | 1/4" | 11.04 | 12 |

APPLICATIONS

| | Target DCOF wet | Suitable |
|--|--------------------|----------|
| Dry & Level – Interior Floor | N/A | ✓* |
| Wet & Level – Interior Floor | ≥ 0.42 | ✓* |
| Shower Floors (Residential or Light Commercial) | ≥ 0.42 | ✓* |
| Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear) | ≥ 0.60 | |
| Ramps & Inclines | ≥ 0.65 | |
| Walls/Backsplashes | N/A | ✓ |
| Countertops | N/A | ✓* |
| Pool Linings | N/A | ✓* |

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Mosaic tile only.



TRIM

| | Type | Number | Size | Pieces/ Carton |
|--|-----------|---------|----------------|-------------------|
|  | 12" Jolly | S1/212J | 1/2 x 11-15/16 | 12 |

INSTALLATION

| Grout Joint Recommendation | Shade Variation |
|---|--|
| <p>Wall: 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%).</p> <p>Mosaic: 1/8"</p> |  Low (V1) |

PERFORMANCE CHARACTERISTICS

| | ASTM# | Wall Result | Mosaic Result |
|---------------------|-------|----------------|------------------|
| Water Absorption | C373 | < 20.0% | < 3.0% |
| Breaking Strength | C648 | 120-230 lbs | > 250 lbs |
| Scratch Hardness | MOHS | 4.0-6.0 | 8.0 |
| Chemical Resistance | C650 | Resistant | Resistant |

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

| | |
|-----------------------------|-------------------------------------|
| 1 Residential Bathrooms (3) | All Residential / Light Commercial* |
| 2 All Residential Areas | 4 All Residential / Commercial |

* Mosaic tile only.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltille.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles for more information.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltille® products and information, visit our website at daltille.com.

