

4.5 mm | 12 Mil

ADVENTURO™

RIGID CLICK

PROSERIES™

LUXURY VINYL FLOORING

 daltile



SuperGuard™
REINFORCED SHIELD

UNICLIC®
PATENTED TECHNOLOGY

4.5 mm | 12 Mil

ADVENTURO™

RIGID CLICK

ADVENTURE AWAITS

Experience a premier luxury vinyl floor with the captivating wood tones available in Adventuro™. Unmatched in design and technology, this ultra durable, rigid core plank leads to a superior floor that clicks together with ease and speed.

Cascading in design, these wood looks provide high-graphic variation and texture alongside enhanced performance and quick Uniclic® locking installation. Excellent thermal insulation and superior sound attenuation are just a few of the perks of this high-performing product.

BRILLIANT DESIGN

- 6" x 48" wood look planks
- 12 adventurous colors
- Textured surface for realistic look and feel
- HD design with medium and high-variation
- Multi-layer SPC rigid core with Uniclic® Locking System
- Built-in solid IXPE underlayment pad that resists mold and mildew
- 4.5 mm Thickness

TOP-RANK DURABILITY

- SuperGuard™ Technology 12 Mil wear layer for heavy foot traffic
- 100% Waterproof
- 100% Virgin Vinyl

4.5 mm | 12 Mil
ADVENTURO™
RIGID CLICK

SIZES:



6 x 48
Plank

6 x 48 WOOD LOOK PLANKS



INTREPID AD39



TREKKER AD38



ARC AD35



MARINER AD41



WANDER AD37



EXPLORER AD36



FOREST AD34



TRAVELER AD30



COMPASS AD33



VOYAGE AD31



WILDE AD40



JOURNEY AD32

4.5 mm | 12 Mil
ADVENTURO™
RIGID CLICK



NOISE REDUCING



EASY TO CLEAN



100% WATERPROOF



100% VIRGIN VINYL

SPECIFICATIONS

Product Type:	SPC Rigid Core LVF
Installation:	Click
Thickness:	4,5 mm
Wear Layer:	12 Mil (0.3048 mm)
Finish:	SuperGuard™ Technology
Size:	6" W x 48" L Plank
Underlayment:	Pad Attached; 1.0 mm IXPE
Bevel:	Micro Bevel
Plank Variation:	6 Unique Planks
Sq. Ft./Carton:	32.15
Pieces/Carton:	16
Weight	2.80 lbs per pc / 45.74 lbs per carton
Installation Advisory:	Adventuro™ click LVF uses Uniclic® Locking System; no adhesive required. See daltile.com/LVF for more recommended installation information.
Transitions:	Click LVF Transitions are offered in a Slim Trim 4-in-1 Transition, Extra Tall Stair Nose, Vinyl Stair Cap, and Full Round Stair Tread. See daltile.com/LVF for more information.
* Special Order Transitions:	Round Stair Nose, Quarter Round, and Slim Cap.
Warranty:	Limited 30 Year Residential Warranty Limited 10 Year Multifamily Warranty Limited 7 Year Light Commercial Warranty

PERFORMANCE & CHARACTERISTICS

Construction:	Commercial Grade Luxury Vinyl Flooring; 100% Virgin Vinyl
Classification:	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness:	ASTM F2421 - Passes - ± 0.010 " max
Size and Tolerance:	ASTM F2421 - Passes - ± 0.016 in. / linear foot
Thickness:	ASTM F386 - Passes - ± 0.13 mm
Flexibility:	ASTM F137 - Passes - 1" mandrel
Dimensional Stability:	ASTM F2199 - Passes - $< 0.25\%$ / linear foot
Static Load Limit:	ASTM F970 - Passes, Test to Limit (+0.005")
Residual Indentation:	ASTM F1914 - Passes - Average $< 8.0\%$
Resistance To Chemicals:	ASTM F925 - Passes - ≤ 1 Slight Change
Resistance To Light:	ASTM F1515 - Passes - $\Delta E \leq 8$
Resistance To Heat:	ASTM F1514 - Passes - $\Delta E \leq 8$

NOTES

See daltile.com/LVF for recommended installation and care guidelines



CERTIFIED BY
SCS Global Services



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltile® products and information,
visit our website at daltile.com/LVF

PROSERIES™
LUXURY VINYL FLOORING

daltile

©2024 Dal-Tile, LLC (4/24)

COORDINATING TRIM

Seven trims and moldings that are designed to coordinate with each of our existing colors within the collection.


STOCKING ITEMS:

- EXTSN:** Extra Tall Stair Nose (2" x 94")
- VSCAP:** Flush-Mount Vinyl Stair Cap (2-3/4" x 44") (Length may vary by series.)
- SLMIT:** Slim Trim 4-in-1 Transition (2" x 94") , Four unique trims and moldings in one single SKU (T-Molding, Hard Surface Reducer, Carpet Transition, End Cap)
- RNDSTRD:** Full Round Stair Tread (12-1/5" x 50")

SPECIAL ORDER ITEMS:


- VRDSN:** Round Stair Nose (1-3/4" x 94")
- VQRND:** Quarter Round (3/4" x 94")
- VSLCAP:** Slim Cap, Low Profile End Cap (1-3/8" x 94")

STOCKING ITEMS:

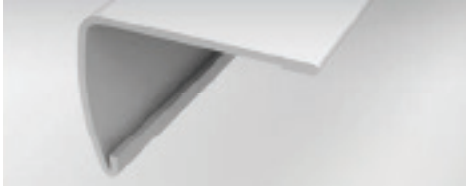

EXTRA TALL STAIR NOSE

Creates a transition to the edge of the step by overlapping the flooring on the back end. Can also be installed flush on floors with an overall thickness up to 4 mm.*

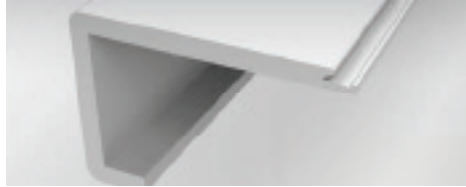


VINYL STAIR CAP

Creates a smooth and flush finish on the edges of steps by using the same vinyl flooring plank to ensure a corresponding color and texture.



SLIM TRIM 4-IN-1 TRANSITION

Performance Accessories' exclusive 4-in-1 transition allows you to utilize a single transition for four different applications.

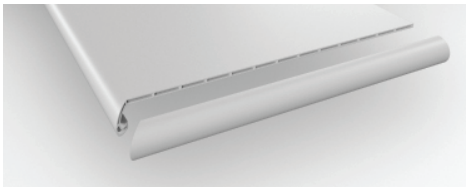

FULL ROUND STAIR TREAD

A vinyl stair tread with pre-attached stair nosing. Can be used on steps with or without nosing.

EACH OF THE BELOW ARE ACHIEVED VIA THE SLIM TRIM 4-IN-1 TRANSITION (SHOWN ABOVE)



T-MOLDING

Used to transition between flooring of equal heights and in doorways.



HARD SURFACE REDUCER

Connects two floors of different heights.



END MOLDING


Finishing up to a threshold, sliding door, etc.



CARPET TRANSITION

Provides a smooth transition between your hard surface floor & carpet. A carpet tap down trim must be used & is sold at your local hardware store.

SPECIAL ORDER ITEMS:

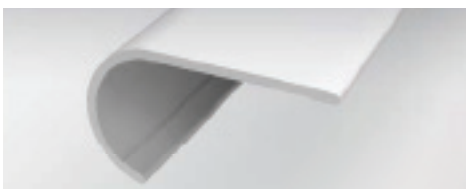

ROUND STAIR NOSE

Creates a transition to the edge of the step by overlapping the flooring on the back end. Can also be installed flush on floors with an overall thickness up to 4 mm.*



QUARTER ROUND

Conceals the expansion space between the wall and the flooring.



SLIM CAP

Low profile end cap used to transition from flooring to carpet, masonry, sliding doors, and other exterior door jambs.



*References to flooring thickness refer to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. Vinyl or Laminate, the underlayment, either attached or loose lay and any additional vapor barriers.