

Model

DH455010

Description

- Ceramic disc valve
- 2-function spray/aerated stream pull-out spout
- 1 or 3 hole mount with deck plate
- Pull-out hose with spring assist retraction system
- Quick connect spout and valve with flex hose
- A112.18.1M, 2.2 gpm (8.3 LPM) maximum flow rate @ 60 psi

Standards



Certified to NSF/ANSI 61
Section 9

- NSF 61-9
- Energy Policy Act of 1992



NSF/ANSI 372

- ASME A112.18.1M/A112.18.1
- NSF/ANSI 372




- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms

Warranty

H+C waterware products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

Flow Rate

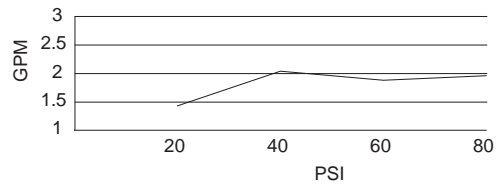

Finishes Available

- Chrome
- Other: Refer to H+C Waterware website for additional finish

