

# **SPECIFICATIONS**

# ROMAN TUB FAUCET WITH SOFT TOUCH PERSONAL SHOWER™

## Description

- 2 handle with solid brass spout
- Soft Touch Personal Shower<sup>™</sup> with integral diverter system\*
- Spout plug for pressure testing & plaster guard
- Fits 1 3/8" to 1 1/2" diameter mounting hole

### **Standards**

- ASME A112.18.1
- CSA B125
- Listed IAPMO/UPC
- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms 長

D303754 SONORA™

#### Available Colors & Finish

• Chrome

بغ

- Brushed Nickel (BN)
- Chrome with Satin Nickel Accents (CSN)


**Trim Kits:**(for use w/rough-in valves) D303654T (w/o Personal Shower)

#### **Special Packaging**

- This product also available with valve packaged separate from trim.
- Use with rough-in valve:
   D210000BT (10" CC fixed) OR
   D215000BT (widespread)
- Valves are combination 1/2" copper sweat, 1/2" NPT threaded connectors for all ports

### Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

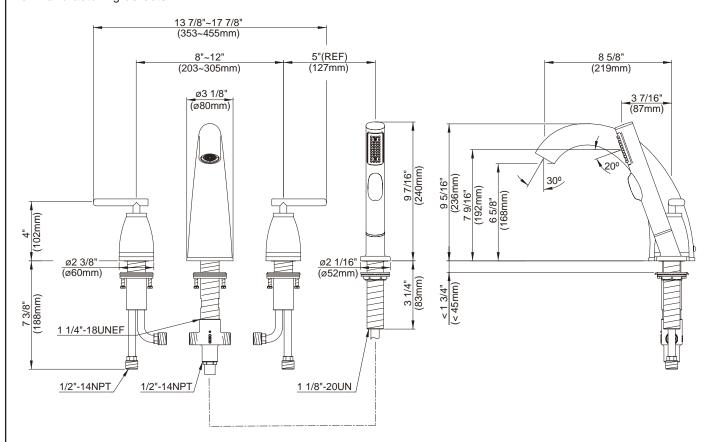

\* Danze Soft Touch Personal Shower™ is designed to operate only when the button is pressed; water will flow to the spout whenever pressure is released from the button.


Specific Features: \_\_\_\_\_\_ Submitted Model No.: \_\_\_\_\_



# **SPECIFICATIONS**

# ROMAN TUB FAUCET ROUGH-IN VALVES-CRITICAL DIMENSIONS

Rough-in valve D215000BT (widespread)

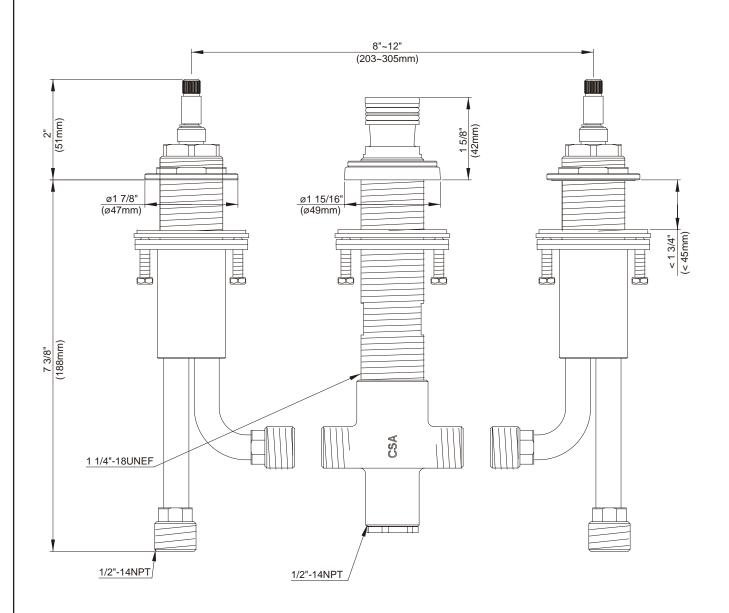

Specific Features: \_\_\_\_\_\_ Submitted Model No.: \_\_\_\_\_

<sup>\*</sup> Installation method shown is for deck thickness of less than 1-3/4".

If the installation is for deck thickness between 1-3/4" and 3-1/2", the sleeve nut needs to be reversed.