




Tub and Shower

TRIM ONLY MultiChoice™ Universal Thermostatic shower for dual showers w/standard 24" Stainless Steel Bar with ADA Slide handshower 2.5 GPM (9.5 L/min) and shower diverter valve with Diverter Tub Spout - requires separate order of R10700-UNWS Rough-in

Model No: T17TH935-25

- ASME A112.18.1 / CSA B125.1
-  Indicates compliance to ICC/ANSI A117.1
- Thermostatic Valve ASSE 1016
- Volume Control and Diverter lever handles ADA compliant to ICC/ANSI A117.1/ADA
- Handshower backflow protection provided by two integral certified check valves in series, which operate independently, ASME A112.18.3
- Handshower ADA compliant to ICC/ANSI A117.1/ADA
- PAUSE WARNING – FOR T17TH9 and T17TH3

Plumbing Codes require that showerheads and handshowers provide a small but continuous flow of water (trickle) when in "PAUSE" mode. Because of this continuous flow, in certain circumstances pressure

is in trickle mode and/or changes in the position of the shower handle while in "PAUSE" mode could result in dramatic change of the water when the shower head or handshower is returned to "ON" position.



ALWAYS point the shower head away from yourself when returning to the "ON" position and feel the water with your hand before resuming your shower to ensure the water flow is not too hot or too cold.

- TempAssure® 17T Thermostatic cartridge
- Thermostatic wax element maintains the outlet temperature to +/- 3.6 F
- Polished chrome plated finish
- Non-removeable red/blue temperature markings
- Separate ROUGH-IN – R10700-UNWS required
- ADA Compliant diverter handle
- ADA Compliant lever volume control, field adjustable to limit rotation into hot water zone; temperature adjustment dial
- In-wall diverter valve (R10700-UNWS ROUGH-IN)
- Standard 24" Stainless Steel Bar with ADA Slide Handshower with Push Button Pause
- Handshower Flow Rate MAX: 2.5 GPM @ 80 PSI (9.5 L/min @ 552 kPa)
- Handshower Flow Rate MIN: 2.4 GPM @ 45 PSI (9.1 L/min @ 310 kPa)
- Backflow protection provided by two integral check valves in handshower
- Spout - 1/2" IPS metal spout with pull up diverter

OPERATION:

- Handle#: 5 - Metal Lever Volume Control Handle w/Temperature Adjustment

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced September 25, 2015.

Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030

DO NOT allow children or others who might not understand this warning to use the "PAUSE" function.

- (Contact Delta Representative for State and/or Local Approvals)


- **PAUSE WARNING (FOR T17TH8 and T17H3)**
Optional 1753 mm (69") Long Chrome Plated Brass Double Spiral Hose (Type 89 Standard Pause) that showerheads and handshowers provide a small but continuous flow of water (trickle) when in "PAUSE" mode.
#3 Shower - Touch Clean Showerhead, Arm and Flange
Because of this continuous flow, in certain circumstances pressure variations flow rate may change.
#3 Shower - Flow Rate MAX 20 GPM @ 55 PSI (703 kPa)
temperature control handle while in "PAUSE" mode could result in dramatic changes to the temperature of the water when the shower head or hand shower is returned to the "ON" position.
#3 Shower - Flow Rate MIN: 1.8 GPM @ 45 PSI (6.8 kPa)
Optional 914 mm (36") stainless steel slide bar to replace standard bar
ALWAYS point the shower head away from yourself when returning to the "ON" position and feel the water with your hand before resuming your shower to ensure the water flow is not too hot or too cold.
DO NOT allow children or others who might not understand this warning to use the "PAUSE" function.

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced September 25, 2015.

Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030

Model No: T17TH935-25

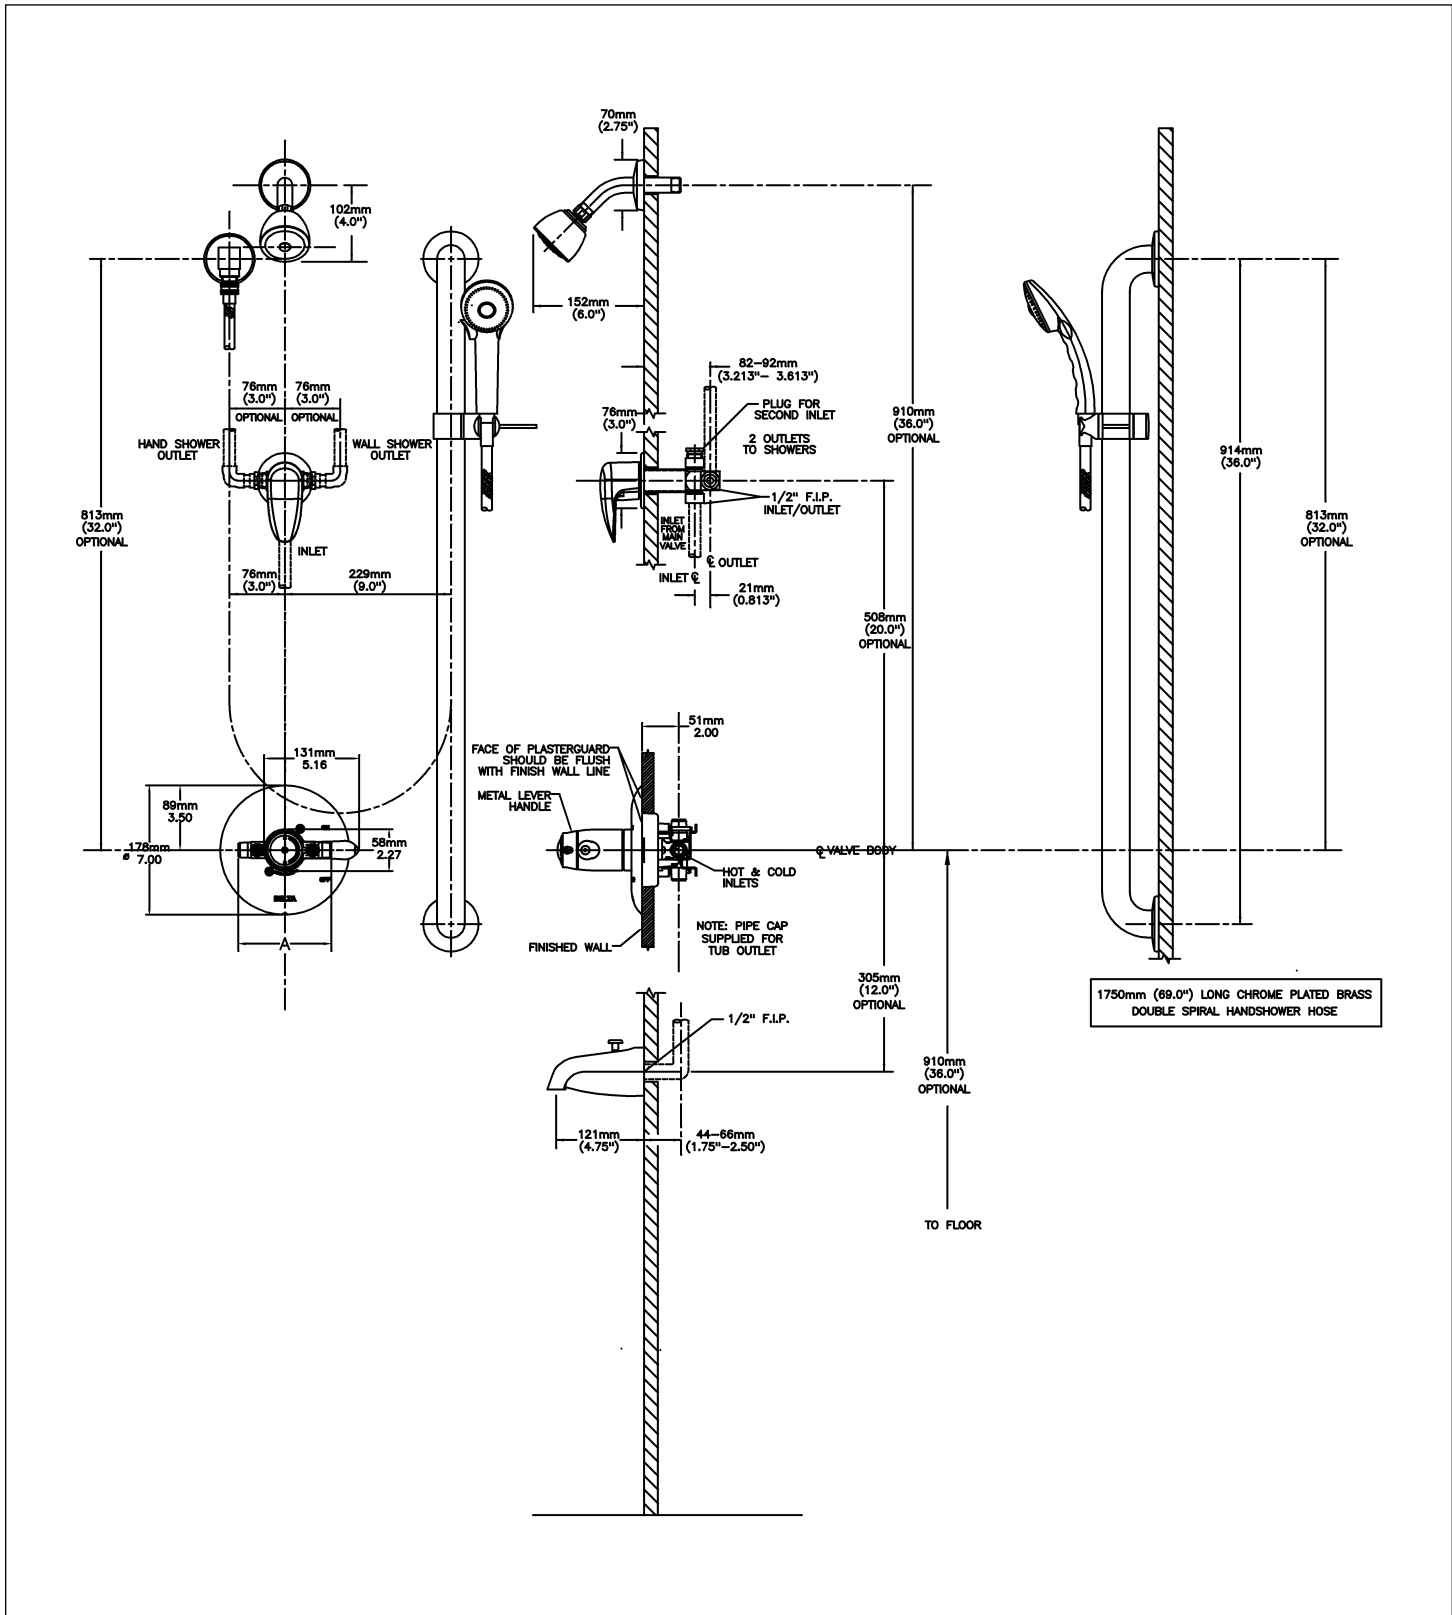

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced September 25, 2015.

Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
 Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030