DELTA

Lavatory Faucets
Single Hole Mount with Metal Pop-up

Model No: 22C851

COMPLIES WITH:

- CSA certified
- Verified compliant with 0.25% weighted average Pb content regulations
- Complies to ASME A112.18.1/CSA B125.1
- Complies to ASME A112.18.6 for Flex Connector Models
- ♿ Indicates compliance to ICC/ANSI A117.1
- Complies to ASME A112.18.6 for flex connector models
- (Contact Delta Representative for State and/or Local Approvals)

SPECIFICATION:

- CAST BRASS
- Ceramic cartridge with rotational limit stop
- Metal hold-down package
- Colour coded plug button on handle for hot/cold identification
- Chrome Finish
- Outlet#: 5 - Vandal Resistant 0.5gpm (1.9 L/min) Non-Aerating Spray Outlet
- Handle#: 1 - Vandal Resistant 89mm(3 1/2") lever handle - ADA compliant- colour indexed
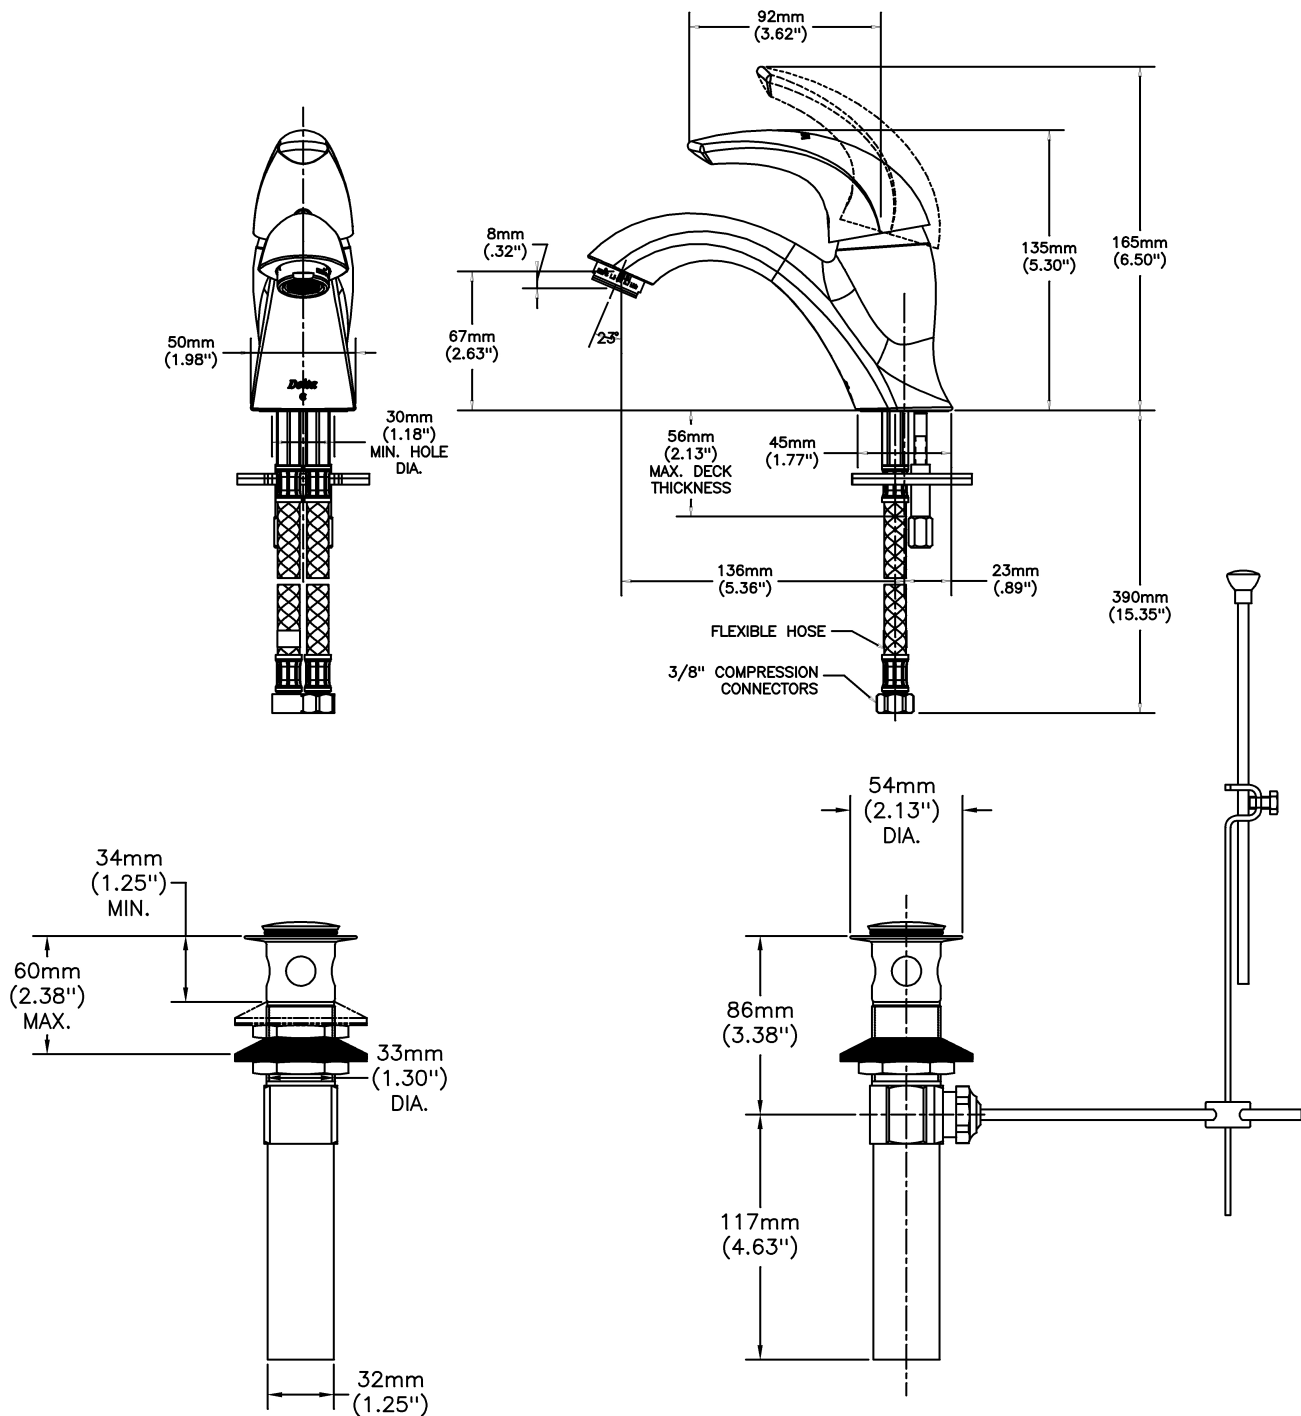
OPERATION:

- Not Available

(Dimensional drawing on following page)

- 1.0.26512

DELTA®

92mm
(3.62")

8mm
(.32")

135mm
(5.30")

165mm
(6.50")

50mm
(1.98")

67mm
(2.63")

23°

30mm
(1.18")
MIN. HOLE
DIA.

56mm
(2.13")
MAX. DECK
THICKNESS

45mm
(1.77")

136mm
(5.36")

23mm
(.89")

390mm
(15.35")

FLEXIBLE HOSE

3/8" COMPRESSION
CONNECTORS

34mm
(1.25")
MIN.

60mm
(2.38")
MAX.

33mm
(1.30")
DIA.

32mm
(1.25")

54mm
(2.13")
DIA.

86mm
(3.38")

117mm
(4.63")

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference.
Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced May 25, 2021.

- 1.0.26512