

Electronic Flush Valves & Retrofit Kits

Trim Only for HARDWIRE operated electronic concealed flush valve for WALLHUNG WC with 1 1/2" BACK inlet-14" x 20" Front Access Cover

Model No: 1600T6102ATR

COMPLIES WITH:

- IAPMO listed to CSA B125.3 and ASSE 1037
- ADA Compliant and meets Handicapped Accessibility Standard ICC/ANSI A117.1 of less than 5 lbs. handle operating force..
- Patented
- (Contact Delta Representative for State and/or Local Approvals)





NOTES:

(3) For separate purchase of a Hardwire Converter with Battery Back-up, see061047A

SPECIFICATION:


- Hardwire (24 VAC) infrared electronic activated concealed flush valve system
- Stainless steel cover with integral sensor utilizing H2Optics® technology and S/S vandal resistant mounting screws
- Metal mounting box or frame, power function light, field selectable sensor range
- Preset blocking time, built-in activation delay
- Electronic manual override
- Solenoid operation valve
- . HARD WIRE operated
- For WALLHUNG WC with 1 1/2" BACK inlet
- With 14" x 20" Front Access Wallplate
- External water conserving flush adjustment: Factory set to 6 Litre(1.6 Gal.) -Field Adjustable from 4.8L to 25L (1.27 to 6.6 Gal.)

OPERATION:

- 8 second blocking time
- 4 second activation delay
- Adjustable flush volume using adjustment screw on flush valve
- $_{\bullet}$ Selectable sensing distance: 24" to 56" in 8" increments. Factory set to 40"
- 24 hour courtesy flush factory set to off

(Dimensional drawing on following page)



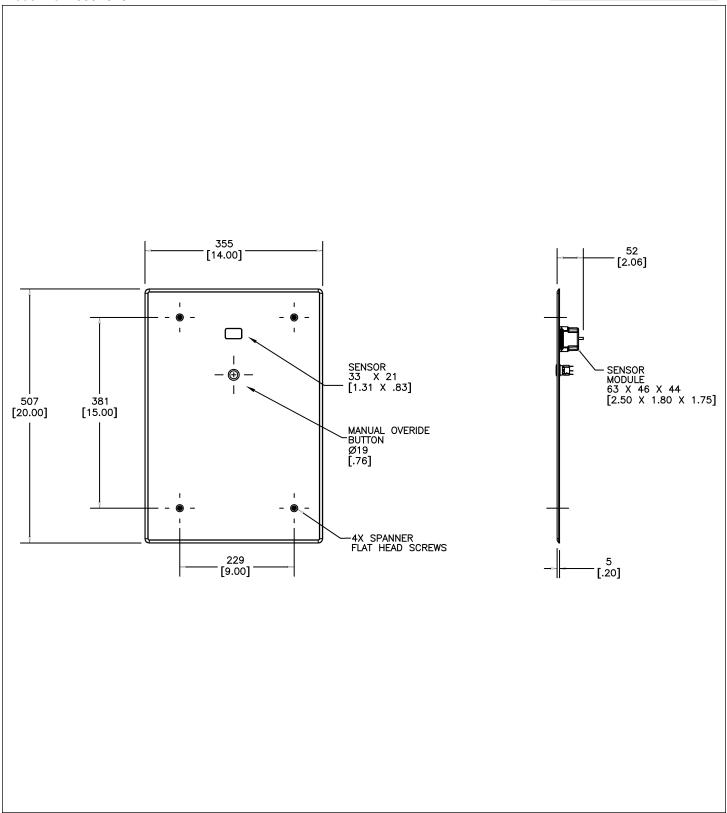

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced December 20, 2016.