

## Surgeon Scrub-Up

Pedal Valve

# Model No: 54T5322A-R4

### **COMPLIES WITH:**

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- & Foot Pedal Control No. 3 Indicates compliance to ICC/ANSI A117.1
- Outlet options 2, 3, 4 and 7 are EPA WaterSense listed
- Verified compliant with 0.25% weighted average Pb content regulations
- Long foot pedals ADA compliant and meets Handicapped Accessibility
- Standard ASME A117.1 of less than 5 lbs operating force\n
- (Contact Delta Representative for State and/or Local Approvals)





## SPECIFICATION:

- Foot Pedal Mixing Valve
- Spout: R4 Gooseneck spout-6.0" spout reach 10.4" height (unmounted)-Standard rigid/swivel field installation unless LS Limited swing option selected- Vandal resistant .090" wall thickness-(R4)
- Outlet#: 2 Vandal Resistant 1.5 GPM (5.7 L/Min) Laminar w/Agion® Antimicrobial
- Wallmount brass turret
- With vandal resistant locking lugs,
- 3/8" IPS shank, and locknut
- Forged brass wallmount self close foot pedal valve
- Two aluminum indexed pedals
- Polished chrome plated finish
- With inlet stops
- With outlet volume control stop
- Set screw wall flanges

#### **OPERATION:**


Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced January 09, 2017.

#### Model No: 54T5322A-R4



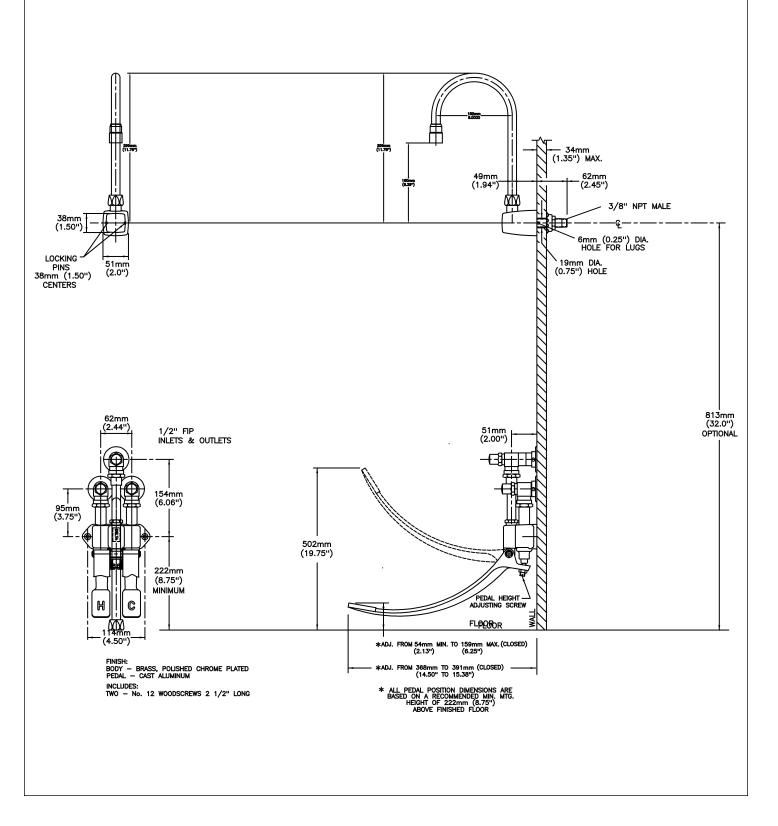

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced January 09, 2017.