

Surgeon Scrub-Up

Pedal Valve

Model No: 54T5432A-R6

COMPLIES WITH:

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- & Foot Pedal Control No. 3 Indicates compliance to ICC/ANSI A117.1
- Outlet options 2, 3, 4 and 7 are EPA WaterSense listed
- Verified compliant with 0.25% weighted average Pb content regulations
- (Contact Delta Representative for State and/or Local Approvals)





SPECIFICATION:

- Foot Pedal Mixing Valve
- Spout: R6 Gooseneck spout-6.0" spout reach -13.5" height(unmounted)-Standard rigid/swivel field installation unless LS Limited swing option selected-Vandal resistant .090" wall thickness
- Outlet#: 2 Vandal Resistant 1.5 GPM (5.7 L/Min) Laminar w/Agion® Antimicrobial
- Deckmount brass flange,
- 3/8" IPS shank, and locknut
- Forged brass floormount self close foot pedal valve
- Two indexed pedals
- Polished chrome plate finish
- No stops


OPERATION:

Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced January 10, 2017.



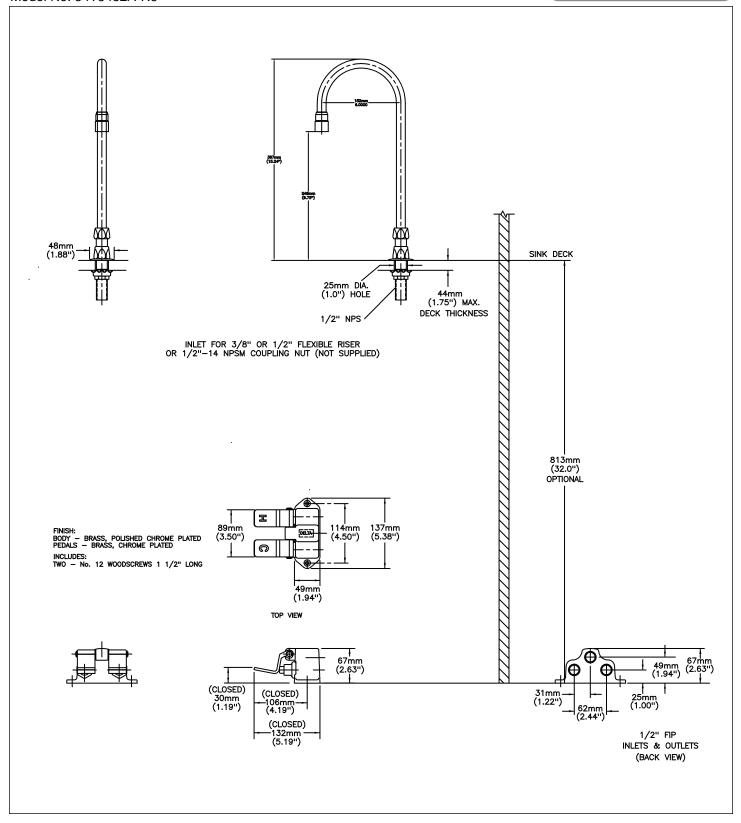

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced January 10, 2017.