

Wallmount Sink Faucets

TECK®



Specification: (example)

- **CAST BRASS** two handle wallmount sink faucet
- 203mm (8") centers, polished chrome plated finish
- **BRASS** swing spout or 3/8" IPS **BRASS PIPE** Rigid/Swivel Gooseneck Spout
- ADA compliant color indexed metal lever or blade handles with vandal resistant screws
- and ... with ... (add **CER-TECK™** 1/4 turn ceramic structures or **TUF-TECK™** compression structures)
- with ... integral check stops (if required)
- with ... (add spout required)
- with ... (add outlet required)
- with ... (add handle required)
- with ... adjustable centers (add Suffix **AC** if required – See Back Page)

















Engineer/Architect Approval

Model Specified: _____

Approval: _____ Date: _____

DESCRIPTION	CER-TECK™	TUF-TECK™	PRODUCT NO.
Less integral stops	CER-TECK™		28C4
With integral check stops	CER-TECK™		28C6
Less integral stops	TUF-TECK™		28T4
With integral check stops	TUF-TECK™		28T6



SPOUT		OUTLET		HANDLE	
0	<input type="checkbox"/>	0	<input type="checkbox"/>	0	<input type="checkbox"/>
1	203mm (8") Wallform Swing Spout (2) (S2)  <input type="checkbox"/>	1	Vandal Resistant 1.9 USGPM (7.2 L/min) Flow Control Rosespray  <input type="checkbox"/>	1	<input type="checkbox"/>
2	203mm (8") Tubular Swing Spout (2) (S5)  <input type="checkbox"/>	2	Vandal Resistant 1.5 USGPM (5.7 L/min.) Laminar w/Antimicrobial By AgION™  <input type="checkbox"/>	2	102mm (4") Hooded Blade Handles  <input type="checkbox"/> 
3	<input type="checkbox"/>	3	Vandal Resistant 1.5 USGPM (5.7 L/min.) Flow Control Aerator  <input type="checkbox"/>	3	76mm (3") Lever Blade Handles  <input type="checkbox"/> 
4	279mm (11") Tubular Swing Spout (2) (S7)  <input type="checkbox"/>	4	Standard 1.5 USGPM (5.7 L/min.) Flow Control Aerator  <input type="checkbox"/>	4	102mm (4") Blade Handles, Sanitary Hoods  <input type="checkbox"/> 
5	<input type="checkbox"/>	5	<input type="checkbox"/>	5	<input type="checkbox"/>
6	<input type="checkbox"/>	6	<input type="checkbox"/>	6	<input type="checkbox"/>
7	<input type="checkbox"/>	7	<input type="checkbox"/>	7	<input type="checkbox"/>
8	<input type="checkbox"/>	8	<input type="checkbox"/>	8	<input type="checkbox"/>
9	Heavy Duty (R4), 152mm (6") Bend Rigid/Swivel Gooseneck Spout (1)  <input type="checkbox"/>	9	<input type="checkbox"/>	9	<input type="checkbox"/>

(1) See Page 9.C.1 for **Optional Rigid/Swivel Spouts**. These spouts can ONLY BE added to **SPOUT Option No. 9**.

(2) See Page 9.C.2 for **Optional Swing Spouts**. These spouts can ONLY BE added to **SPOUT Option No. 2**.

Refer to www.specselectonline.com for individual models.

Flowrates are at 60 PSI.



Note: Use this page front and back as a product submittal sheet.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselectonline.com for finish options and product availability.

Approvals:

- CSA certified
- Complies to ASME A112.18.1
- Lever Blade Handle No.'s 2, 3 and 4, ADA Compliant and meet Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.
- IAPMO listed

(Contact Delta Representative for State and/or Local Approvals.)

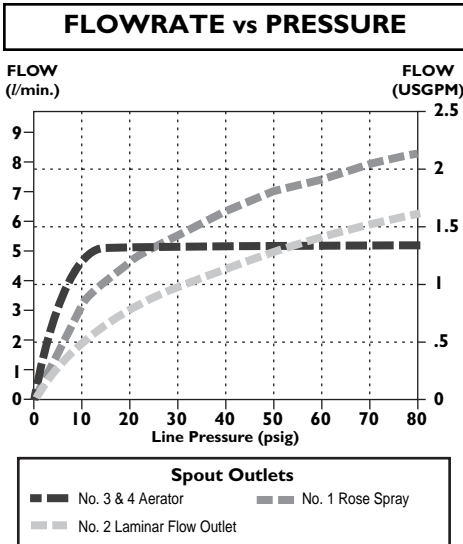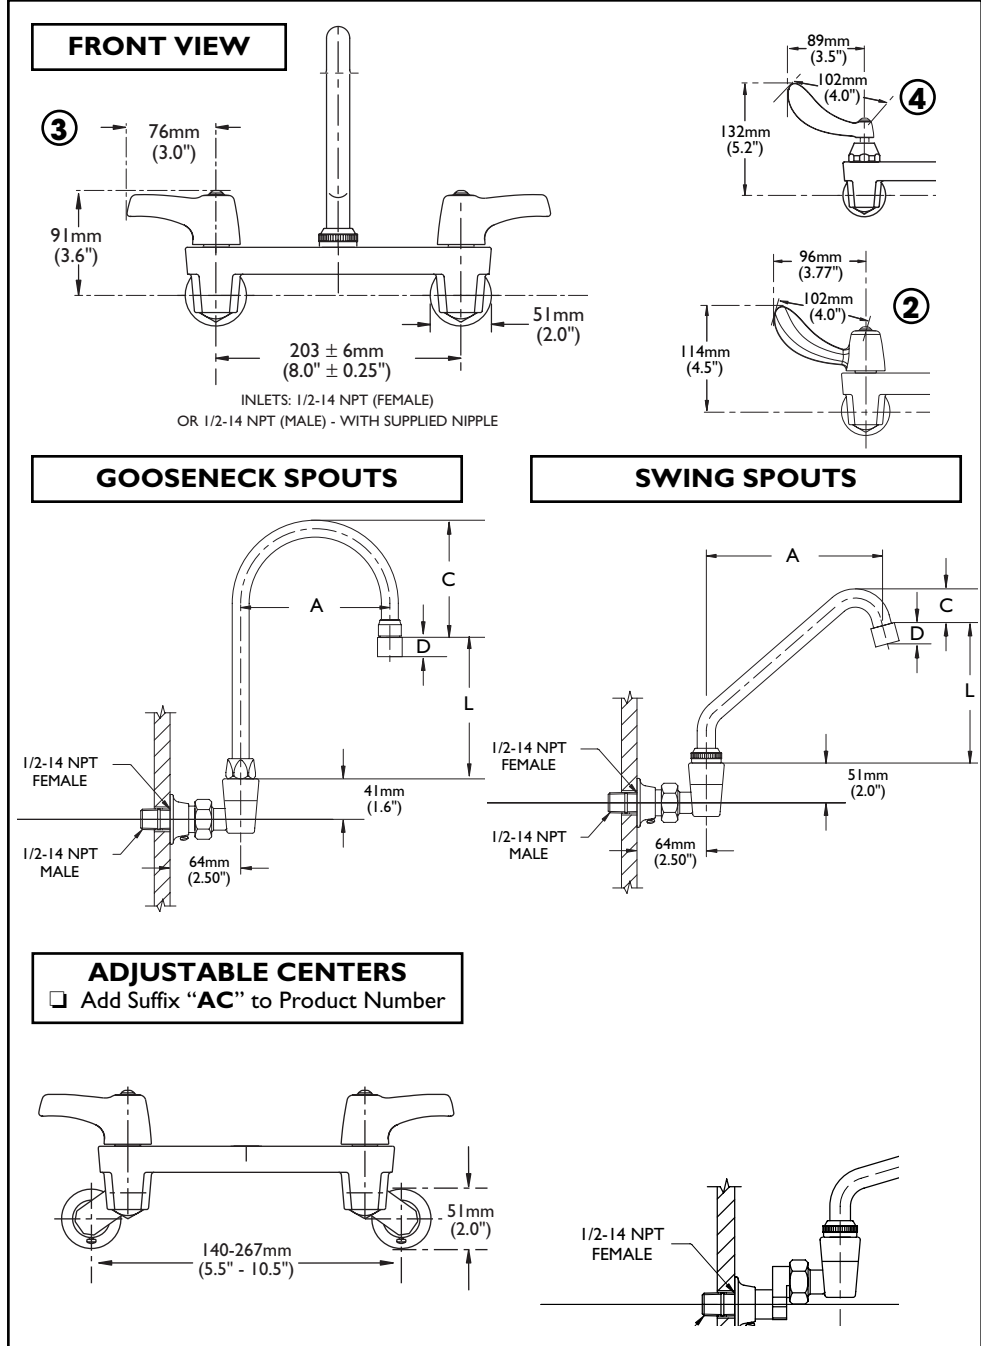

OUTLET NO.	"D"	
	mm	in.
1	17	0.67
2	18	0.69
3	18	0.69
4	17	0.67

GOOSENECK SPOUT ASSEMBLIES

Spout No.	SPOUT TYPE	"A"		"C"		"L"	
		mm	in.	mm	in.	mm	in.
9	Gooseneck-Standard (R4)	152	6	124	4.9	146	5.8

SWING SPOUT ASSEMBLIES

Spout No.	SPOUT TYPE	"A"		"C"		"L"	
		mm	in.	mm	in.	mm	in.
1	8" Wallform Spout (S2)	206	8.1	15	0.6	130	5.1
2	8" Tubular Spout (S5)	185	7.3	41	1.6	147	5.8
4	11" Tubular Spout (S7)	277	10.9	28	1.1	104	4.1

See Page 9.C.1 for additional optional spouts.

See Page 9.C.2 for additional optional spouts.

INLETS - 1/2" FIP/MIP

Note: Measurements may vary ± 6mm (0.25")