

# CLARIFI™

HIGH FLOW HIGH CAPACITY UNDER SINK  
WATER FILTRATION SYSTEM

## USER GUIDE



see what Delta can do™

# FILTERED WATER MADE EASY.

The Delta® Clarifi™ High Flow High Capacity Under Sink Water Filtration System is tested and certified against NSF international standards to improve your in-home water quality.

Designed for reliable, easy-to-use in-home filtration, the digital display monitors and reports filter and battery life. Filter changes are quick and easy with cartridges that install with a simple twist and lock mechanism and don't require water to be shut off.

## SCAN TO VIEW VIDEO TUTORIALS



Watch an install video with step-by-step help from Delta pros.



And, learn how to change your High Flow Carbon Filter.

OR, VISIT [YOUTUBE.COM/@DELTAFAUCET](https://www.youtube.com/@deltafaucet)

# YOUR WATER FILTRATION SYSTEM

## ■ INCLUDED IN THE BOX

- Manifold
- High Flow Carbon Filter Cartridge
- Battery box (includes 3AA)
- Hoses

## ■ NOT INCLUDED IN THE BOX

- Standard faucet
- Cold water supply stop



# FILTER AND BATTERY REPLACEMENT

## HOW TO REPLACE THE FILTER

- Twist and turn the High Flow Carbon Filter on the system clockwise to remove the used filter.
- Remove protection cap on the new replacement High Flow Carbon Filter.
- Twist the new filter counter-clockwise to install.
- Reset filter life following instructions on next page.
- Then, turn on the faucet and manually flush the system for 10 minutes to purge the new filters.

## HOW TO CHANGE THE BATTERIES

- Remove the battery compartment from the cabinet and unplug from the unit.
- Lift up the tabs to open compartment and replace with new batteries (3AA).
- Insert battery pack cable back into the manifold. Confirm display screen is on and working.
- When the batteries reach below 10% capacity, the battery icon will blink and the unit will beep. The display screen will activate and turn off after 10 seconds.




**REFER TO THE MANUAL FOR MORE DETAILS ON INSTALLING THE UNIT**

## ORDER A CLARIFI™ REPLACEMENT FILTER

High Flow High Capacity Under Sink Water Filtration System  
Cartridge — DWQ300101



# LED DIGITAL DISPLAY

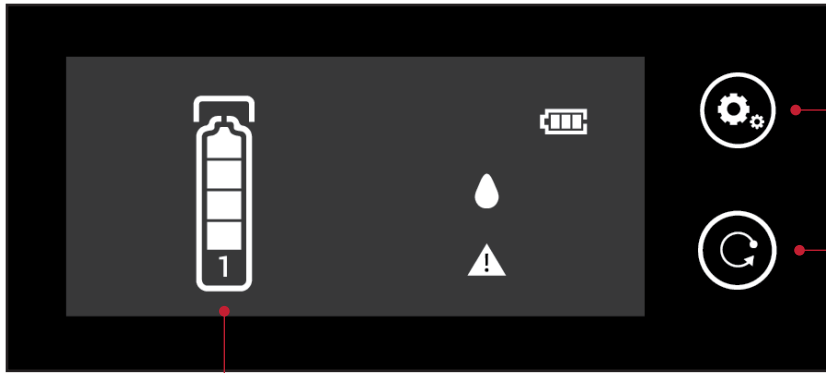

## SETTINGS

After installing new filters, push and hold the settings button for 3 seconds. Filter 1 icon will blink. You are now in Settings Mode, continue to reset instructions.

## RESET

Push and hold the reset button for 3 seconds and the icon will reset to full capacity.


Push the settings button to exit the reset mode.

When finished replacing the cartridge, turn on the faucet, and manually flush the system for 10 minutes to break in the new filter.

## AUDIBLE ALERTS

When below a 5% capacity, the filter icon will blink. The unit will buzz every 6 seconds when the water is flowing.

At 0% filter capacity, the icon will blink and the unit will beep consistently.

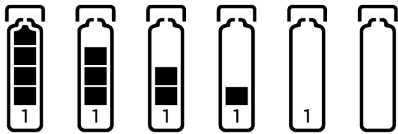

## FILTER LIFE

The filter icons will reflect its capacity: 100%, 75%, 50%, 25%, 5% and 0%.

Filter life: 1 year or 10,000 gallons (whichever comes first)



## BATTERY LIFE



## POTABLE WATER



## REPLACE FILTER

# TRACK YOUR FILTER MAINTENANCE

FILTER NAME	DATE CHANGED

FILTER NAME	DATE CHANGED



## SCAN TO REGISTER YOUR PRODUCT

When you register your product you'll receive convenient customer service, helpful content and more. Or, visit [DeltaFaucet.com/register](http://DeltaFaucet.com/register).

For live customer support:  
800-345-3358



see what Delta can do™

117768 03/25