

CLARIFI™

2-STAGE UNDER SINK ADVANCED
WATER FILTRATION SYSTEM

USER GUIDE



see what Delta can do™

FILTERED WATER MADE EASY.

The Delta® Two-Stage Under Sink Advanced Water Filtration Systems are tested and certified against NSF international standards to improve your in-home water quality.

Designed for reliable, easy-to-use in-home filtration, the digital display monitors and reports filter and battery life. Filter changes are quick and easy with cartridges that install with a simple twist and lock mechanism and don't require water to be shut off.

SCAN TO VIEW VIDEO TUTORIALS



Watch an install video with step-by-step help from Delta pros.



And, learn how to change both your filters.

OR, VISIT [YOUTUBE.COM/@DELTAFAUCET](https://www.youtube.com/@DELTAFAUCET)


YOUR WATER FILTRATION SYSTEM

■ INCLUDED IN THE BOX

- Manifold
- Sediment Filter Cartridge
- Advanced Carbon Filter Cartridge
- Tee adapter
- 1/4" push connect elbow
- Battery box (includes 3AA)
- Hoses

■ NOT INCLUDED IN THE BOX

- Standard faucet
- Beverage faucet
- Cold water supply stop

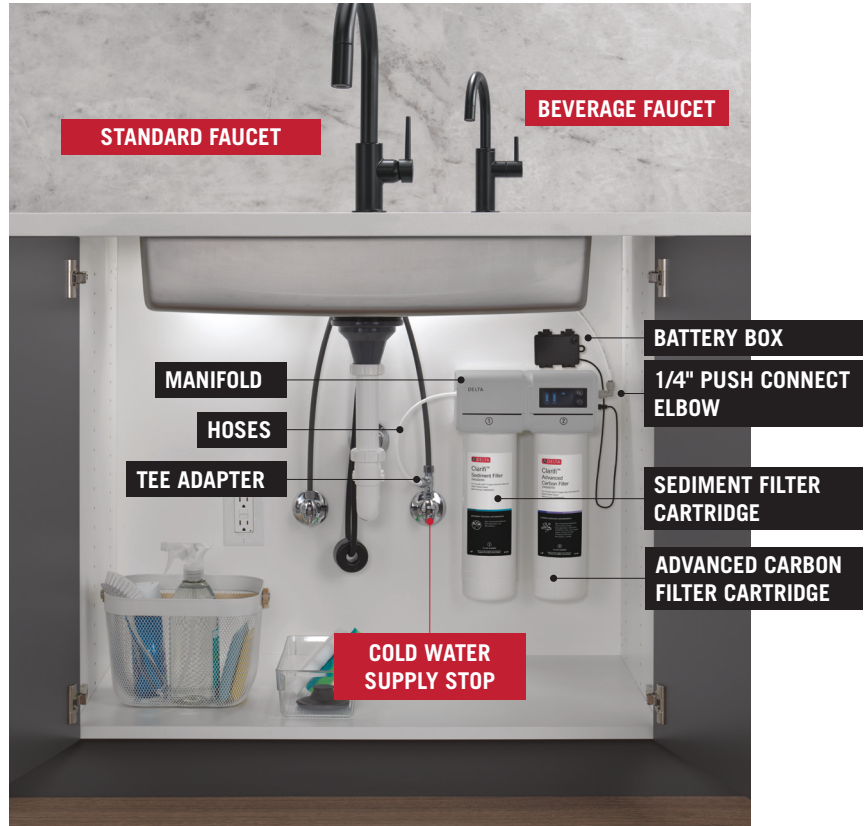

FILTER AND BATTERY REPLACEMENT

HOW TO REPLACE BOTH FILTERS

- Twist and turn the Sediment Filter on the system clockwise to remove the used filter.
- Remove protection cap on the new replacement Sediment Filter. On the label, it will be marked with ①.
- Match it with ① on the system manifold.
- Twist the new Sediment Filter counter clockwise to install.
- Repeat same steps to remove and install the new Advanced Carbon Filter. On the label, it will be marked with ②.
- After both filters have been replaced, reset the filter life following instructions on next page.
- Then, turn on the beverage faucet and manually flush the system for 10 minutes to purge the new filters.

HOW TO CHANGE THE BATTERIES

- Remove the battery compartment from the cabinet and unplug from the unit.
- Lift up the tabs to open compartment and replace with new batteries (3AA).
- Insert battery pack cable back into the manifold. Confirm display screen is on and working.
- When the batteries reach below 10% capacity, the battery icon will blink and the unit will beep. The display screen will activate and turn off after 10 seconds.




REFER TO THE MANUAL FOR MORE DETAILS ON INSTALLING THE UNIT

ORDER THE CLARIFI™ SEDIMENT AND CARBON REPLACEMENT FILTERS

2-Stage Under Sink Advanced Water Filtration System — DWQ300700



LED DIGITAL DISPLAY

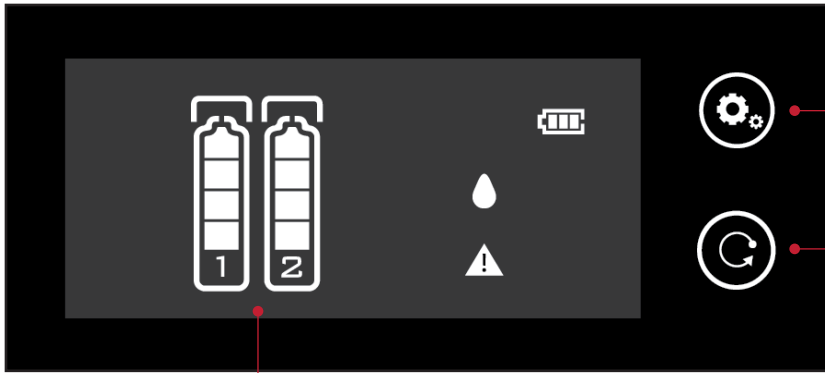

SETTINGS

After installing new filters, push and hold the settings button for 3 seconds. Filter 1 icon will blink. You are now in Settings Mode, continue to reset instructions.


RESET

Push and hold the reset button for 3 seconds and the icon will reset to full capacity.

Return to settings button to navigate to Filter 2 icon, then repeat reset instructions.

Push the settings button to exit the reset mode.

When finished replacing both filters, turn on the faucet, and manually flush the system for 10 minutes to break in the new filters.



FILTER LIFE

The filter icons will reflect its capacity: 100%, 75%, 50%, 25%, 5% and 0%.

Sediment Filter life: 1 year or 1,100 gallons (whichever comes first)

Advanced Carbon Filter life: 1 year or 1,100 gallons (whichever comes first)



BATTERY LIFE



POTABLE WATER



REPLACE FILTER

AUDIBLE ALERTS

When below a 5% capacity, the filter icon will blink. The unit will buzz every 6 seconds when the water is flowing.

At 0% filter capacity, the icon will blink and the unit will beep consistently.

TRACK YOUR FILTER MAINTENANCE

FILTER NAME	DATE CHANGED

FILTER NAME	DATE CHANGED



SCAN TO REGISTER YOUR PRODUCT

When you register your product you'll receive convenient customer service, helpful content and more. Or, visit DeltaFaucet.com/register.

For live customer support:
800-345-3358



see what Delta can do™

117767 03/25