

Concealed Wallmount Bedpan Cleansers

TECK®

DELTA
COMMERCIAL

Specification: (example)

- Concealed in-wall
 - **Single handle mixing control valve**
 - Integral check stops
 - Polished chrome plated finish trim
 - 57mm (2.24") ADA lever blade handle
 - Rigid wall spout, spray bedpan outlet, insulated bent tube and handle
 - 1500mm (59") reinforced hose and hanger
- and ...with ... less stop or with stop (as required)
 ...with ... (add spout required)
 ...with ... quick disconnect
 (Add suffix **QD** if required - See Back Page)



Engineer/Architect Approval

Model Specified:

Approval:

Date:

DESCRIPTION	PRODUCT NO.		
Single Handle Concealed Wallmount Bedpan Cleanser	53T5		7



VB/SPOUT	OUTLET	HANDLE
0 <input type="checkbox"/>	0 <input type="checkbox"/>	0 <input type="checkbox"/>
1 <input type="checkbox"/>	1 <input type="checkbox"/> Spray Outlet 1500 mm (59") Reinforced Vinyl Hose, Hanger and Insulated Handle (1)	1 <input type="checkbox"/>
2 <input type="checkbox"/>	2 <input type="checkbox"/>	2 <input type="checkbox"/>
3 <input type="checkbox"/> Rigid Spout with Wallmounted Vacuum Breaker	3 <input type="checkbox"/>	3 <input type="checkbox"/>
4 <input type="checkbox"/>	4 <input type="checkbox"/> Spray Outlet with Self-close Stop 1500 mm (59") Reinforced Vinyl Hose, Hanger and Insulated Handle (1) (3)	4 <input type="checkbox"/>
5 <input type="checkbox"/> Rigid Spout with Spout End Double-check Vacuum Breaker	5 <input type="checkbox"/>	5 <input type="checkbox"/>
6 <input type="checkbox"/> Rigid Spout with Pressure Vacuum Breaker (2)	6 <input type="checkbox"/>	6 <input type="checkbox"/>
7 <input type="checkbox"/>	7 <input type="checkbox"/>	7 <input checked="" type="checkbox"/> 57mm (2.24") Lever Blade Handle
8 <input type="checkbox"/>	8 <input type="checkbox"/>	8 <input type="checkbox"/>
9 <input type="checkbox"/>	9 <input type="checkbox"/>	9 <input type="checkbox"/>

Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sheet.

- (1) Check with Local Code Authorities for proper cross flow and hazard protection requirements. (2) No. 6 Vacuum Breaker recommended for High Hazard Cross Connections and Continuous Pressure.
 (3) When using self-close outlet #4, we recommend using #5 or #6 Vacuum Breaker Spouts for continuous pressure.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation.
 Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

Approvals:


- CSA certified
- Complies to ASME A112.18.1
- ADA Compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.

Vacuum Breakers/Spouts:

- Spout No. 3 VB certified under ASSE 1001 and CSA Standard B64.1.1
- Spout No. 5 VB certified under ASSE 1035 and CSA Standard B64.8
- Spout No. 6 VB certified under ASSE 1020 and CSA Standard B64.1.2

(Contact Delta Representative for State and/or Local Approvals.)

FLOWRATE vs PRESSURE

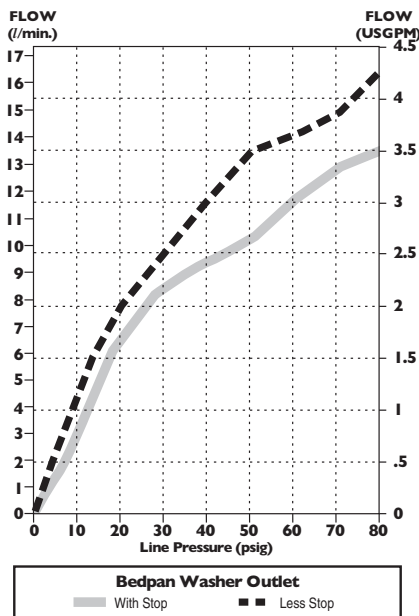


INLETS - 53T5 Series 1/2" FIP/Copper


Note: Measurements may vary $\pm 6\text{mm}$ (0.25")

Refer to www.specselect.com for individual models.


SINGLE LEVER

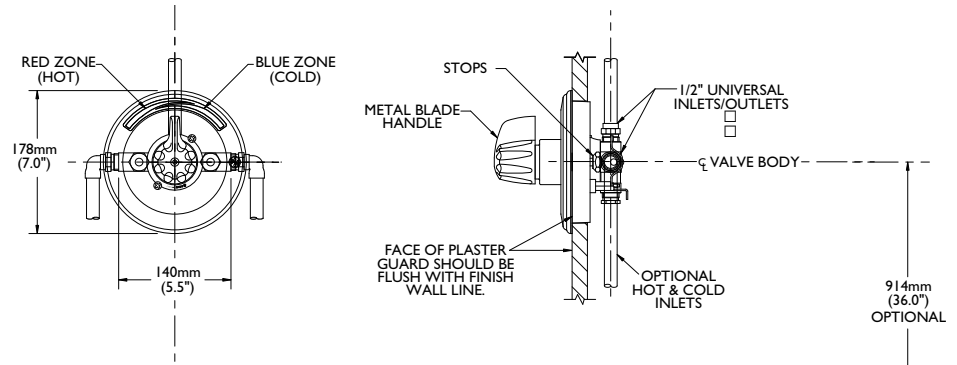

NO. 5 SPOUT



NO. 3 and NO. 6 SPOUTS

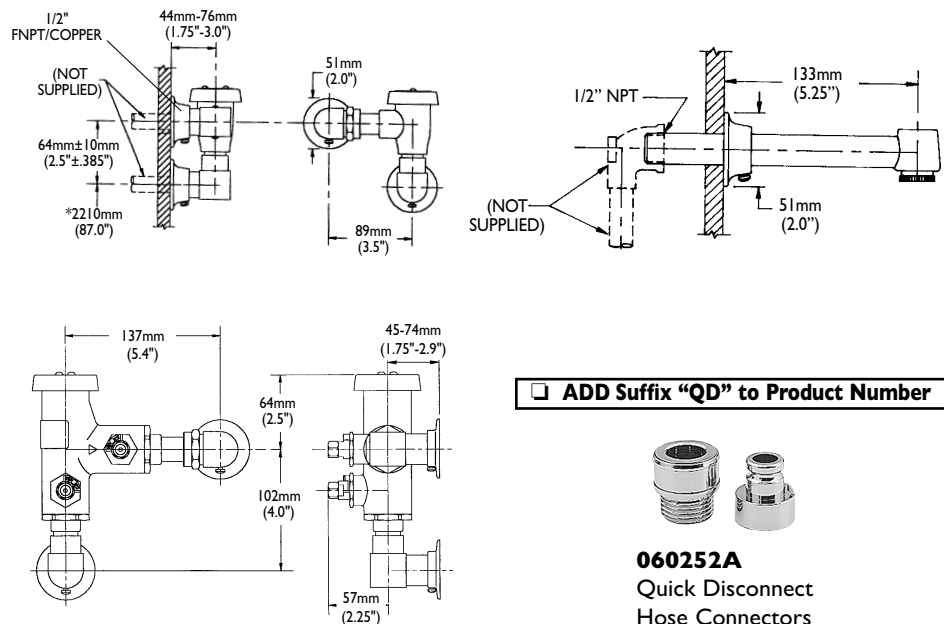

ADD Suffix "QD" to Product Number



060252A
 Quick Disconnect
 Hose Connectors

*Suggested - Check local building code requirements on backflow protection and all installation heights.

Note: Use this page front and back as a product submittal sheet.