

Pre-Rinse Faucets

TECK®



Specification: (example)

- **CAST BRASS Wallmount** pre-rinse faucet
- 203mm (8"), two handle, integral check stops
- TUF-TECK institutional structures
- Polished chrome plated finish trim
- ADA compliant, color indexed, vandal resistant, 76mm (3.0") metal lever blade handles
- 3/8" IPS rigid riser, wall bracket, spray head hook and ...
- with ... (add No. 5 product variation)
- with ... (add outlet required)
- with ... adjustable centers (add Suffix **AC** if required) (see Back Page)



55T1513

Specification: (example)

- **CAST BRASS Deckmount** pre-rinse faucet
- Two handle, Inlet check tails
- Polished chrome plated finish
- TUF-TECK institutional structures
- ADA compliant, color indexed vandal resistant, 76mm (3.0") metal lever blade handles
- 3/8" IPS rigid riser, wall bracket, spray head hook and ... with ... (add product variation No. 2 or No. 3) with ... (add outlet required)

Engineer/Architect Approval

Model Specified: _____

Approval: _____ Date: _____

DESCRIPTION	PRODUCT NO.		
Pre-Rinse Faucet	55TI		3



PRODUCT VARIATION	OUTLET	HANDLE
0 <input type="checkbox"/>	0 <input type="checkbox"/>	0 <input type="checkbox"/>
1 <input type="checkbox"/>	1 Spray with Spring Loaded S.S. Hose Auto Shut-off <input type="checkbox"/>	1 <input type="checkbox"/>
2 203mm (8") Deckmount Faucet  <input type="checkbox"/>	2 <input type="checkbox"/>	2 <input type="checkbox"/>
3 102mm (4") Center Deckmount Faucet  <input type="checkbox"/>	3 <input type="checkbox"/>	3 76mm (3") Lever Blade Handles  <input checked="" type="checkbox"/> 
4 <input type="checkbox"/>	4 <input type="checkbox"/>	4 <input type="checkbox"/>
5 203mm (8") Center Wallmount Faucet  <input type="checkbox"/>	5 <input type="checkbox"/>	5 <input type="checkbox"/>
6 <input type="checkbox"/>	6 <input type="checkbox"/>	6 <input type="checkbox"/>
7 <input type="checkbox"/>	7 <input type="checkbox"/>	7 <input type="checkbox"/>
8 <input type="checkbox"/>	8 Same as No. 1 Above but with Add-On Faucet (S5), 1.5 USGPM (5.7 L/min.) Aerator (I)  <input type="checkbox"/>	8 <input type="checkbox"/>
9 <input type="checkbox"/>	9 <input type="checkbox"/>	9 <input type="checkbox"/>


(1) See Page 9.C.2 for **Optional Swing Spouts**. These spouts can ONLY be added to **Outlet Option No. 8**, and **55T1090**. Refer to www.specselectonline.com for individual models.

Note: Use this page front and back as a product submittal sheet.


Approvals:

- CSA certified
 - Complies to ASME A112.18.1
 - Lever Blade Handle
ADA Compliant and meets
Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.
 - IAPMO listed
- (Contact Delta Representative for State and/or Local Approvals.)

**Wallmount Faucet
ADJUSTABLE CENTERS**
☐ ADD Suffix "AC" to Product Number

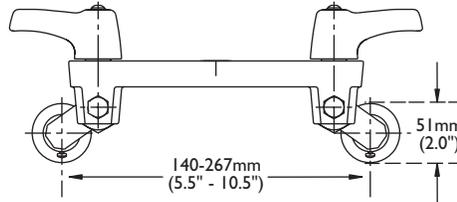


WALL BRACKET

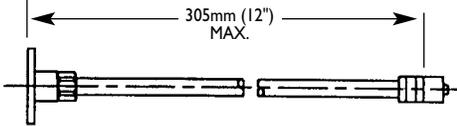


**ADD-ON FAUCET
Outlet Option No. 8**

MODEL No. 55T1090
(Will add 152mm (6") to overall height if ordered and installed separately.)
See Page 9.C.2 for Optional Spouts

Thin Wall Installation

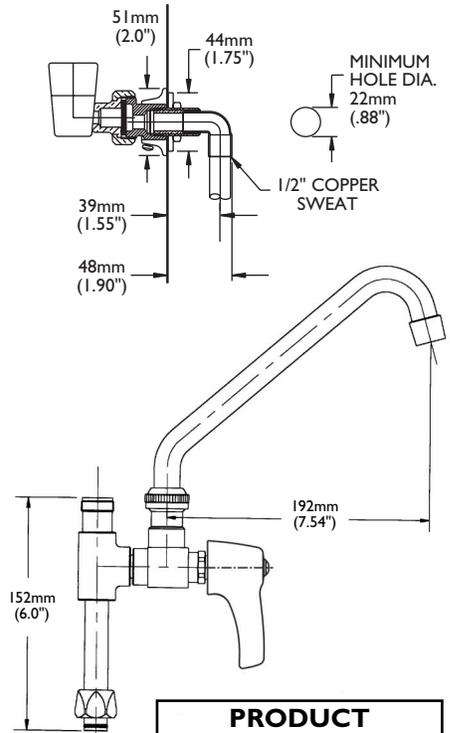

FLOWRATE vs PRESSURE

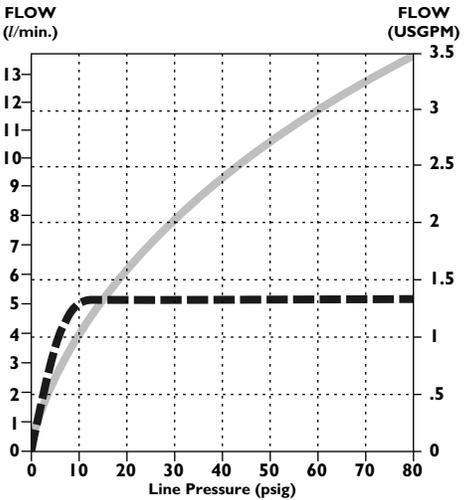


Spray & Spout Outlets


Note: Water/Energy saving spray rated 1.6 USGPM @ 60 PSI

PRODUCT VARIATION No. 2

Note: Overall Height
850mm (33.5") for No. 1 Outlet
885mm (34.9") for No. 8 Outlet




PRODUCT VARIATION No. 5

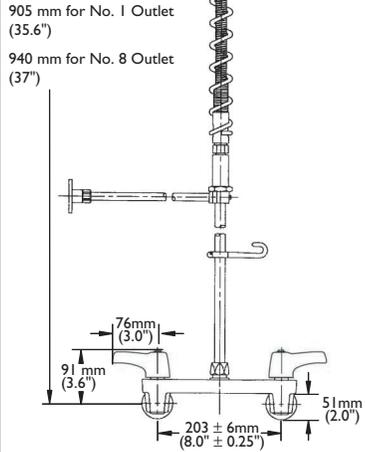

PRODUCT VARIATION No. 3

Note: Overall Height
850mm (33.5") for No. 1 Outlet
885mm (34.9") for No. 8 Outlet

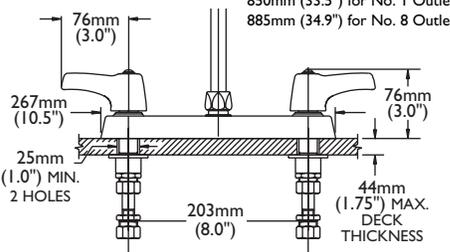

PRODUCT VARIATION No. 5
INLETS - 1/2 - 14 NPT (Female) or 1/2 - 14 NPT (Male) with Supplied Nipple

PRODUCT VARIATION No. 2 & 3
INLETS - 3/8 or 1/2" Flexible Riser or 1/2 - 14 NPSM Coupling Nut (Supplied)

Note: Measurements may vary ± 6mm (0.25")

Refer to www.specselectonline.com for individual models.

Note: Use this page front and back as a product submittal sheet.