



Model No: 592-PLGHDFHW

COMPLIES WITH:

- CSA certified
- Complies to ASME A112.18.1
- ADA Compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. handle operating force.
- U.S. Patent #6, 826, 455
- (Contact Delta Representative for State and/or Local Approvals)





Battery/Hard Wire Lavatory Faucets

Deck mount electronic Proximity[™] lavatory faucet - 8" (203mm) centers – 11.1" (282mm) Forged coverplate with anti-rotation pin - hardwire

SPECIFICATION:


- · Deck mount electronic lavatory faucet
- All metal spout construction
- Proximity[™] Sensing Technology
- Mixing valve required (Order separately)
- Vandal resistant 0.5 gpm (1.9 L/min) flow control non-aerating spray outlet
- 8" (203mm) centers
- 11.1" (282mm) Forged coverplate with anti-rotation pin
- Hardwire unit supplied with 24 VAC to 6 VDC converter (Transformer required. Specify separately)
- Chrome Finish

OPERATION:

- · Hands free (touchless) operation.
- No visible sensor, the spout is the sensor.
- · Water flows when sensor is activated.
- Water flow stops upon de-activiation of sensor.
- Auto shut-off feature. Factory set to 45 seconds. Will reset and recalibrate once obstruction is removed.
- Adjustable sensing distance 0 to 89mm (0 to 3.5") factory set to 89mm (3.5") ± 1/8".
- NOTE: For optimum performance of this product, we recommend a system
 pressure between 20 and 80 PSI static. This product will operate up to a
 maximum of 125 PSI static per ANSI and CSA requirements. However, we
 do not recommend pressures above 80 PSI. Thermal expansion or leaking
 pressure reducing valves may require use of expansion tanks or relief
 valves to ensure your system never exceeds its maximum intended
 pressure setting.

(Dimensional drawing on following page)



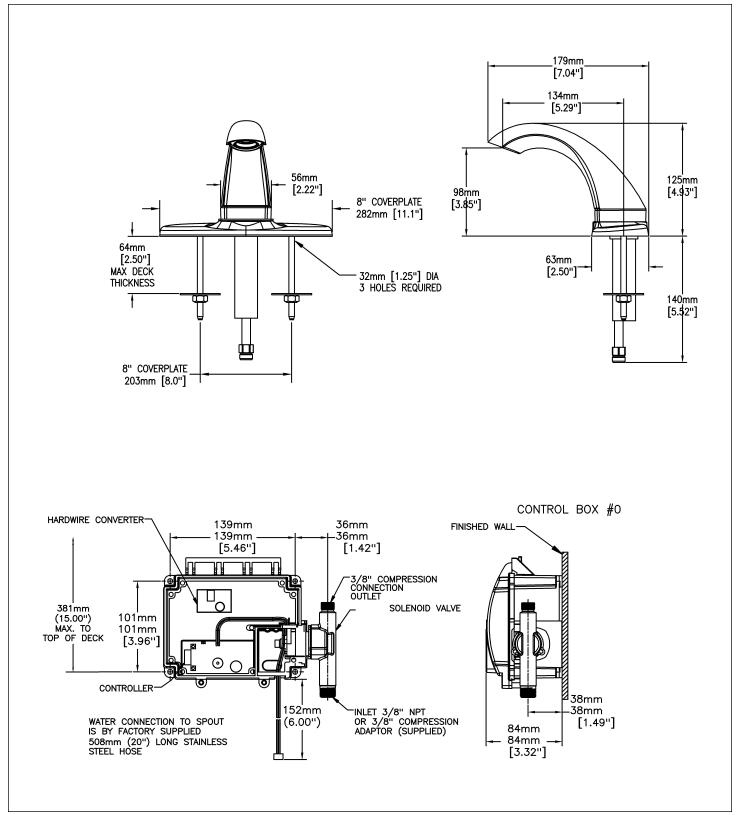

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced November 03, 2011.