Electronic Hand Soap System





SPECIFICATION (example)

- Deck mount electronic hand soap dispenser
- Sensor detects user's hand to automatically dispense soap
- 4 'D' Cell Batteries (included)
- Spacer (included) if sink rim is 3/4" high or greater
- 800 ml Lotion Hand Soap with Moisturizer (included)
- LED light blinks when refill is low
- LED light blinks when battery is low

☐ DESD-250

Chrome spout

☐ DESD-550

Chrome CAST spout

□ 060918A

 Soap Dispenser Plug-in transformer 120 VAC to 6 VDC

□ 060919A

 Soap Dispenser converter 24 VAC to 6 VDC (transformer required – order separately)

DECK MOUNT SOAP DISPENSER DESD-250 I40mm DESD-550 102mm 64mm Spout 42mm (1.65" 12mm (.46") 35mm (1.35") 50mm (2") (4.25") maximum deck thickness Spacer 172mm (6.75")(3.125") **DESD-550 DESD-250** 143mm (5.625") **Battery Pack** 41mm (1.625")

SPECIFICATION (example)


- Soap refill
- 1600 ml
- 4/carton

□ 060916A

Antibacterial Hand Soap

□ 060917A

• Lotion Hand Soap with Moisturizers

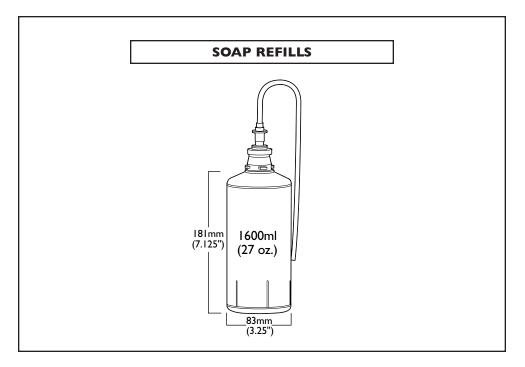

Note: Measurements may vary ± 6mm (0.25")

Refer to www.spectselect.com for individual models.

Note: Use this page as a product submittal sheet. DSP-DESD Rev. A