


Specialty Faucets


HDF®
COMMERCIAL

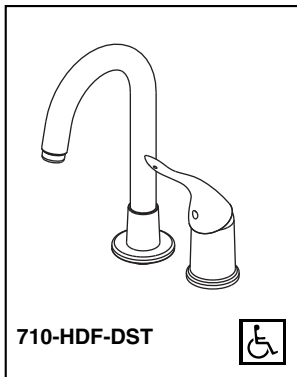

Submitted Model No.: _____

Specific Features: _____

710-HDF-DST & 711-HDF-DST

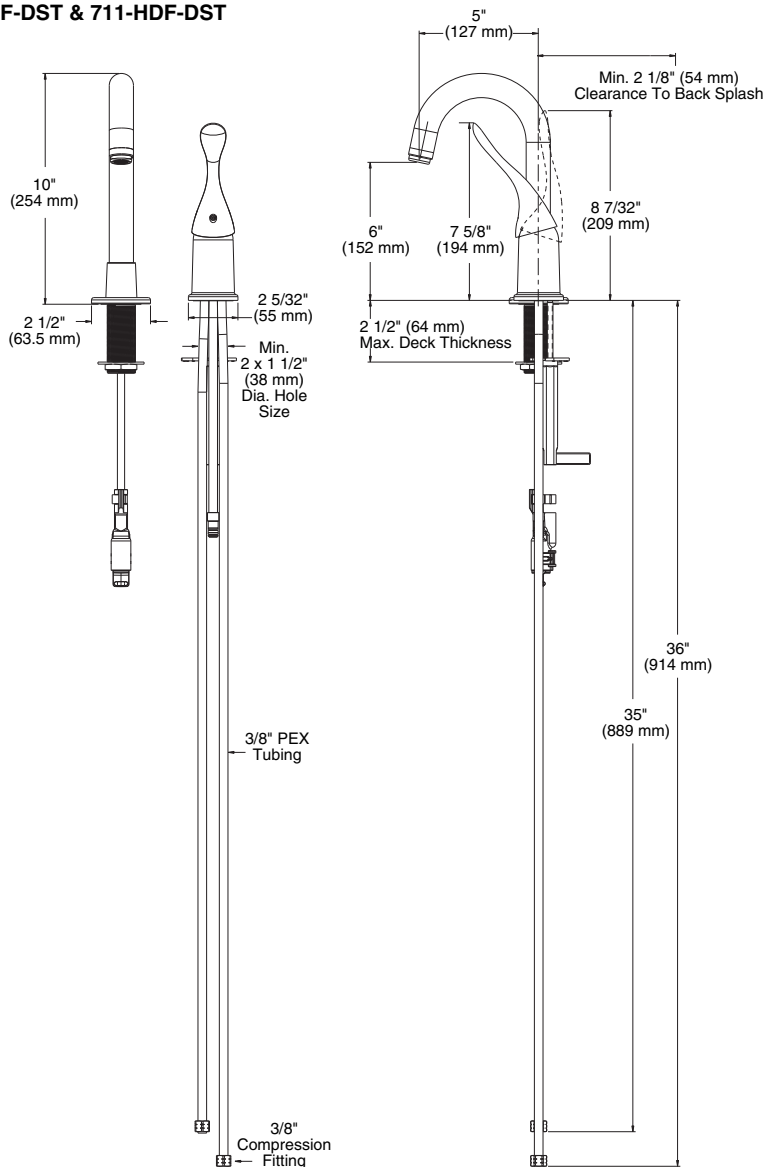

- Single Handle Widespread Deck Mount
- DIAMOND™ Seal Technology
- Utility Faucet
- 2 Hole Sink Applications
- PEX® Hose Installation


STANDARD SPECIFICATIONS:

- Single handle utility deck faucet for exposed mounting on two hole sinks.
- Solid fabricated brass body.
- 5" (127 mm) long, 10" (254 mm) high gooseneck spout. Rigid (710), 180° Swing (711).
- Vandal resistant 6" (152 mm) elbow handle. Red/blue colored graphics indicate hot/cold temperature.
- Control mechanism shall be the DIAMOND coated ceramic cartridge.
- Control handle returns to the neutral position when valve is turned off.
- Adjustable handle limit stop.
- Standard 3/8" (10 mm) compression gasket fittings.
- 3/8" O.D. straight, staggered PEX supply tubes – 35" (889 mm) and 36" (914 mm) long.
- 1.5 gpm (5.7 L/min) vandal-resistant aerator.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed

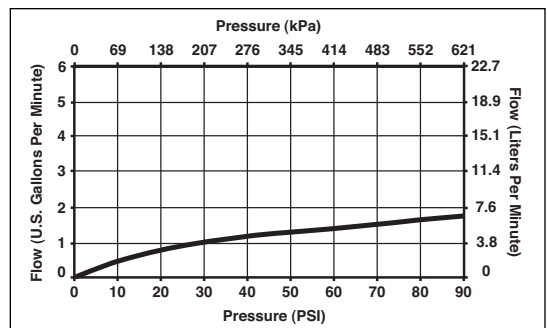

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-710-HDF-DST