


In2ition Installation Instructions

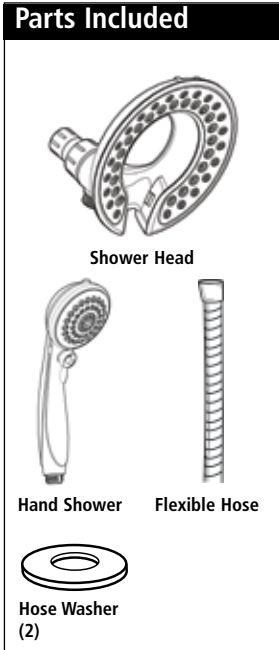

Cleaning of Parts

Only clean with a mild non-abrasive detergent and soft cloth.


Note: Any other cleaning product not specifically designed for cleaning plastic or metal surfaces may damage the finish and will void the warranty.

Limited Lifetime Warranty

Delta Faucet warrants to the owner of this product that it is free from defects in materials or workmanship as listed above from the date of purchase. For service either return it to the location where purchased or return the product postage prepaid (we recommend United Parcel Service) to Alsons Corporation, 3010 W. Mechanic Street, Hillsdale, Mich. 49242 for repair or replacement at our discretion at no charge. This warranty gives you specific legal rights. You may also have other rights that vary where you reside.


For assistance or problems with installation: In the U.S.A. call Toll Free: 1-888-775-3699, 8:00 a.m. to 6:00 p.m. Eastern Standard Time Monday - Friday

1. Install the shower head.

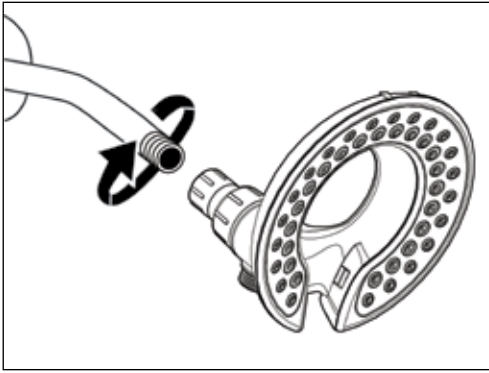


- Make sure to turn off water supply before installing the Shower Head.
- Remove existing Shower Head from Shower Arm.
- Apply Teflon[®] tape (not provided) to Shower Arm if necessary, to ensure leak-free connection.
- Hand tighten the Ball Connector of the Shower Head to the Shower Arm. (Use a wrench if necessary for firm installation.)

2. Install hand shower.

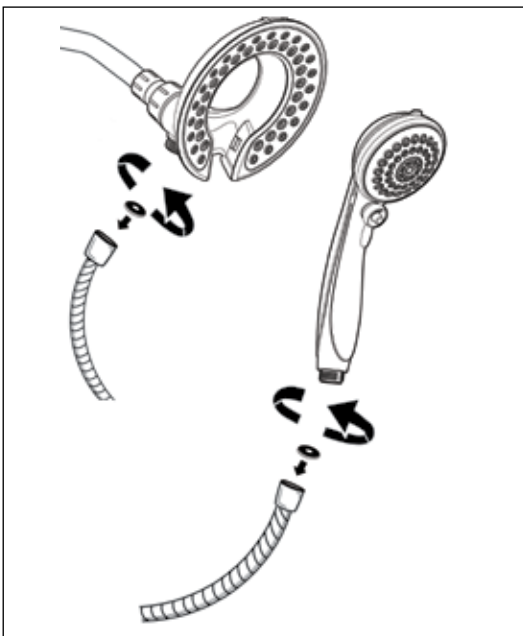


- Confirm the hose washers are installed in the hose nuts at each end of the hose.
- Connect one end of the Flexible Hose to the Shower Head. Connect the other end of the Flexible Hose to the Hand Shower. All connections should be made by hand tightening.

3. Insert hand shower into shower head.

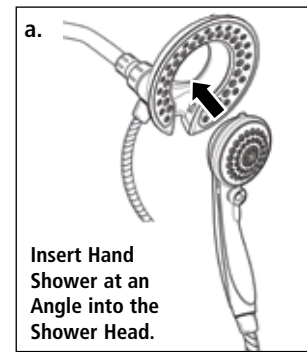


- The Hand Shower should be inserted at an angle so the tab on the top of the Hand Shower fits into the slot in the Shower Head.
- Gently push the Hand Shower into the Shower Head.

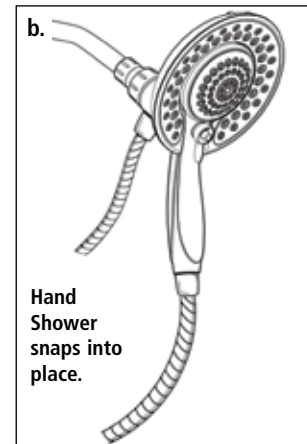


- If the Shower Head moves when removing the Hand Shower, tighten the connection between the Shower Head and the Shower Arm.

4. Removing the Hand Shower from the Shower Head.



- The Hand Shower should be removed at an angle to release from the Shower Head.



- Once the Hand Shower is released from the lower clips of the Shower Head, gently pull the Hand Shower away from the slot in the upper portion of the Shower Head.

WARNING: Plumbing Codes require that shower heads and hand showers provide a small but continuous flow of water (trickle) when in "PAUSE" mode. Because of this continuous flow, in certain circumstances pressure variations in the water line and/or changes in the position of shower temperature control handle while in "PAUSE" mode could result in dramatic changes to the temperature of the water when the shower head or hand shower is returned to the "ON" position.

ALWAYS point the shower head away from yourself when returning to the "ON" position and feel the water with your hand before resuming your shower to ensure the water flow is not too hot or too cold. DO NOT allow children or others who might not understand this warning to use the "PAUSE" function.

