

# Exposed Teck® Flush Valve

**TECK®**  
COMMERCIAL

**DELTA®**

**Specification: (example)**  
**(FOR 1-1/2" TOP INLET CLOSET FIXTURE)**


- Quiet action, TECK® exposed diaphragm flush valve
- Chloramine resistant diaphragm
- Forged brass diaphragm retainer
- Renewable seat
- Polished chrome plated finish
- **External water conserving flush volume adjustment,** (except -48 and -6 models) factory set at 60 PSI to 6 litre (1.6 US gal.)
- Vandal resistant cover screw
- Metal "non hold open" handle
- **1" FIP/copper sweat inlet adaptor** angle check stop with protecting cap
- Adjustable 121mm (4-3/4") plus or minus 11mm (7/16") inlet/valve outlet centers
- Vacuum breaker
- Cover tube and SIS wall flange, spud flange and concealed spud nut

**WITH 610mm (24") "A" LENGTH AND 38mm (1-1/2" offset)**

- **81T261**  
As above
- **81T261-6**  
Same as 81T261, but **Not Field Adjustable**
- **81T261-48**  
Same as 81T261, but factory set at 60 PSI to 4.8 litre (1.27 US gal.), **Not Field Adjustable**



**Approvals:**

- CSA certified
- Complies to ASSE 1037
- ADA compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force. 
- IAPMO Listed

(Contact Delta Representative for State and/or Local Approvals.)

**Engineer/Architect Approval**

Model Specified:


Approval:

Date:

Note: Measurements may vary ± 6mm (0.25")



**81T261**

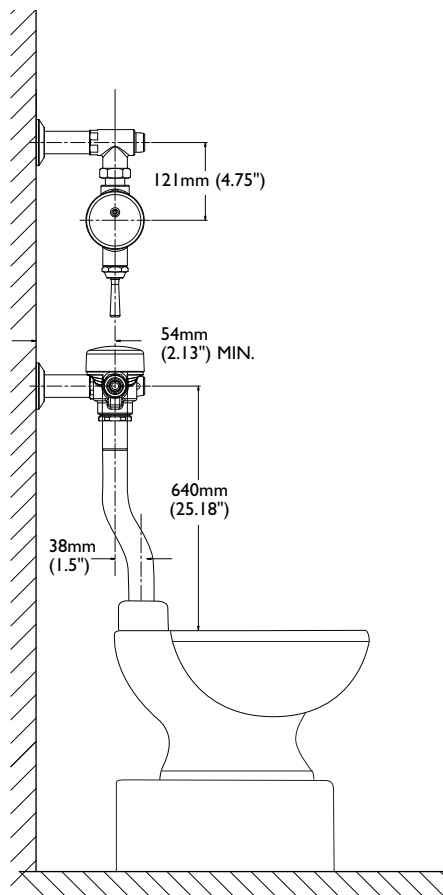

Note: For high and low pressure applications, please see page FEA-81T High Water Pressure note for more details. Verify flow requirements with bowl manufacturer.