

❑ R2470-MIX

SPECIFICATION (example)


- Anti-scald proportional thermostatic mixing valve
- Lockable hand wheel
- Check valves (hot and cold ports)
- Nickel plated brass/bronze construction
- Teflon® coated spool and body to prevent mineral buildup and extend life
- Temperature range 70-120°F
- Maximum flow 10 gpm, minimum 0.5 gpm, $C_v = 1.8$
- Maximum working pressure 125 psi
- Pressure difference between hot and cold ports should not exceed 10 psi
- Maximum hot water supply temperature 212°F
- Inlets/outlets: 1/2" copper sweat

Approvals:

- CSA certified
- ASSE 1070 and ASSE 1016 certified.
- IAPMO listed

(Contact Delta Representative for State and/or Local Approvals.)

THERMOSTATIC MIXING VALVE

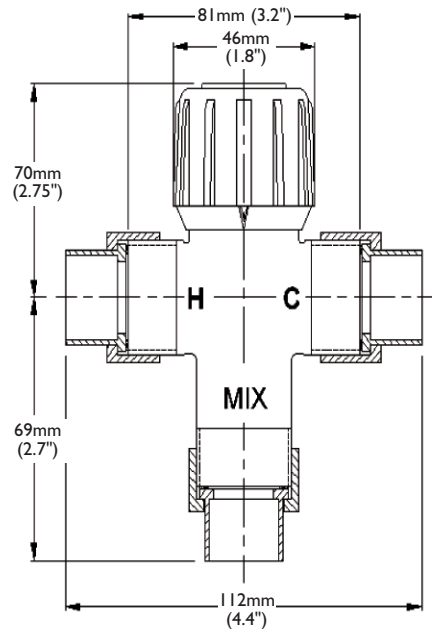

Note: Measurements may vary $\pm 6\text{mm}$ (0.25")

Refer to www.spectselect.com for individual models.

Note: Use this page as a product submittal sheet.