

# MultiChoice™ Universal Pressure Balance Tub and Shower with Diverter Valve for Dual Showers

**TECK®**



**Specification: (example)**

- R10700-UNWS ROUGH-IN only**
- Concealed in-wall MultiChoice™ universal valve
- **Heavy Duty forged brass** valve body, Integral screwdriver stops
- 1/2" Universal inlets to accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adaptors
- 1/2" Male thread inlets/outlets, Back-to-back capability
- In-wall diverter valve
- FINISH TRIM ONLY:**
- Pressure Balancing cartridge with checks
- Polished chrome plated finish
- 57mm (2.24") ADA Compliant valve handle
- 68mm (2.68") ADA Compliant diverter handle
- and ... with ... (add product variation)
- with ... (add shower)



**T13H923**

**Engineer/Architect Approval**

Model Specified:

Approval:

Date:

| TUB AND SHOWER DESCRIPTION                      | PRODUCT NO.  |
|---|--|
| <b>ROUGH-IN with Diverter Valve &amp; Stops</b> | <b>R10700-UNWS</b>   |
| <b>FINISH TRIM only</b>                         | <b>T13H</b> <span style="border: 1px solid black; padding: 0 5px;"> </span> <span style="border: 1px solid black; padding: 0 5px;"> </span> <span style="border: 1px solid black; padding: 0 5px;"> </span> <b>3</b> |

Formerly IIT5 Series



| PRODUCT VARIATION  | SHOWER  | HANDLE   |
|--|---|--|
| ✓  | ✓   | ✓  |
| <b>0</b> <input type="checkbox"/>  | <b>0</b> Specify "0" When No Shower Outlet Required <input type="checkbox"/>                                | <b>0</b> <input type="checkbox"/>  |
| <b>1</b> <input type="checkbox"/>  | <b>1</b> Standard Brass Fixed Spray Showerhead Arm & Flange 2.2 USGPM (8.4 L/min.) <input type="checkbox"/> | <b>1</b> <input type="checkbox"/>  |
| <b>2</b> <input type="checkbox"/>  | <b>2</b> 3-Funtion Touch-Clean Showerhead, Arm & Flange 2.5 USGPM (9.5 L/min.) <input type="checkbox"/>     | <b>2</b> <input type="checkbox"/>  |
| <b>3</b> Shower, Handshower, Diverter Valve, 610mm (24") Combination S/S Slide/Grab Bar (1) <input type="checkbox"/> | <b>3</b> Push-Clean Showerhead Arm & Flange 2.5 USGPM (9.5 L/min.) <input type="checkbox"/>                 | <b>3</b> 57mm (2.24") Lever Blade Handle <input checked="" type="checkbox"/> |
| <b>4</b> <input type="checkbox"/>  | <b>4</b> <input type="checkbox"/>   | <b>4</b> <input type="checkbox"/>  |
| <b>5</b> <input type="checkbox"/>  | <b>5</b> <input type="checkbox"/>   | <b>5</b> <input type="checkbox"/>  |
| <b>6</b> <input type="checkbox"/>  | <b>6</b> 30° Vandal Resistant Cast Wallmount Showerhead 2.0 USGPM (7.6 L/min.) <input type="checkbox"/>     | <b>6</b> <input type="checkbox"/>  |
| <b>7</b> <input type="checkbox"/>  | <b>7</b> <input type="checkbox"/>   | <b>7</b> <input type="checkbox"/>  |
| <b>8</b> <input type="checkbox"/>  | <b>8</b> H2Okinetic Technology™ Showerhead, Arm & Flange, 1.6 USGPM (6.0 L/min.) <input type="checkbox"/>   | <b>8</b> <input type="checkbox"/>  |
| <b>9</b> Tub & Shower (Same as No. 3 above) but with Diverter Spout (1) <input type="checkbox"/>                     | <b>9</b> <input type="checkbox"/>   | <b>9</b> <input type="checkbox"/>  |

(1) Product Variations 3 and 9 require selection of the second showerhead from Shower Option No. 1, 2, 3, 6 or 8. Set screw shower arm flange supplied on Shower Option No. 1, 2, 3 and 8. Refer to www.specselect.com for individual models. See Page 2.C.7 for additional Rough-In options.

Flowrates are at 80 PSI. See Page 2.C.4 for Add-On options available. Note: Use this page front and back as a product submittal sheet.


Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

**Approvals:**

- CSA certified
- Complies to ASME A112.18.1
- P/B and Diverter Lever Handles ADA Compliant and meet Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.
- Pressure Balance Valve ASSE 1016
- Handshower back flow protection provided by two integral certified check valves in series, which operate independently, ASME A112.18.3 and ASME A112.18.1 / CSA B125.1.
- IAPMO listed



(Contact Delta Representative for State and/or Local Approvals.)

**FLOWRATE vs PRESSURE**

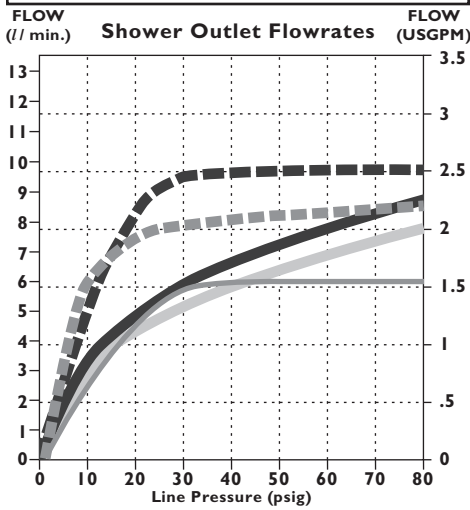

| Shower Outlets     |                   |
|--------------------|-------------------|
| — No. 1 (060890A)  | — No. 6 (060793A) |
| — No. 2 (RP43381)  | — No. 8 (RP46384) |
| — No. 3 (RP38357)  |                   |
| Product Variations |                   |
| No. 3 & 9 (RP7405) |                   |

**FLOWRATE vs PRESSURE**

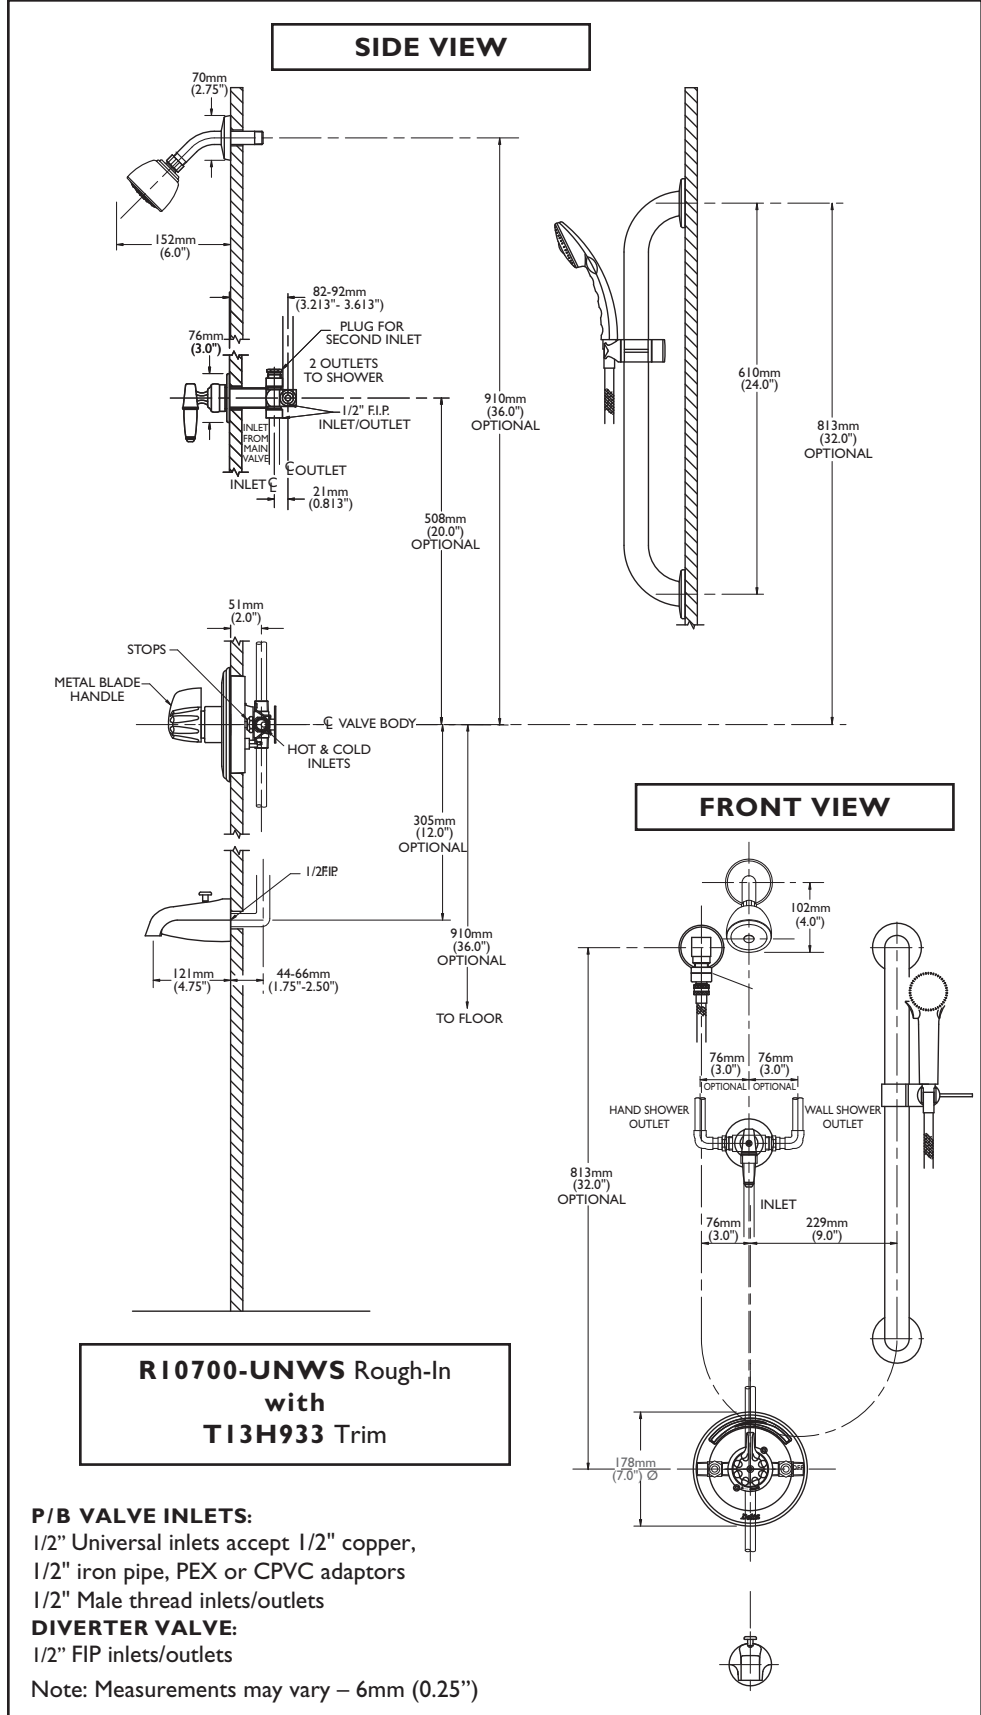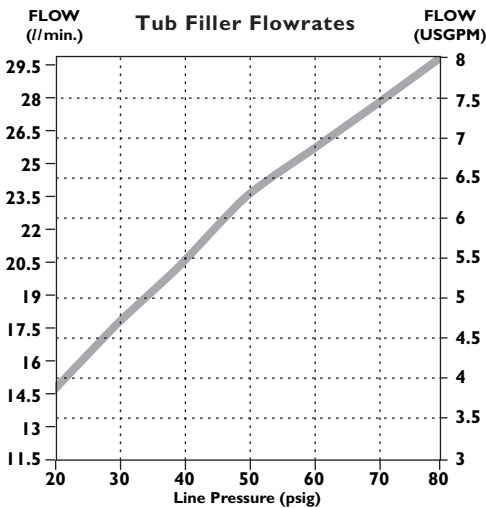

Refer to [www.specselect.com](http://www.specselect.com) for individual models.

Note: Use this page front and back as a product submittal sheet.