



Model No: T13H923-25

## **COMPLIES WITH:**

- CSA certified.
- Complies to ASME Standard A112.18.1.
- Pressure Balance Valve ASSE 1016
- Handshower back flow protection provided by two integral certified check valves in series, which operate independently, ASME A112.18.3 and ASME A112.18.1 / CSA B125.1
- Diverter lever handle ADA compliant and meets Handicaped Accessibility Standard ASME A117.1 of less than 5 lbs operating force
- ADA compliant adjustable slide mechanism on slide bar
- Integral check valves in handshower comply to ASME Standard A112.18.3 for backflow protection
- (Contact Delta Representative for State and/or Local Approvals)
- Pressure balance handle ADA compliant and meets Handicapped Accessibility Standard ANSI A117.1 of less than 5 lbs operating force





## **Tub and Shower**

TRIM ONLY for Tub and Dual Shower unit w/standard 24" Slide Bar handshower and shower diverter valve with diverter spout-backflow protection provided by two integral check valves in handshower-requires separate order of R10700-UNWS Rough-in

## SPECIFICATION:

- Polished chrome plated finish
- Pressure Balance cartridge
- Limit stop for pre-setting Maximum temperature
- Integral checks in the cartridge prevent crossflow between Hot and Cold water inlets
- Non-Removable Blue/Red visual cover indicator for Cold, Mixing and Hot handle positions
- Standard 24" Slide Bar handshower and shower diverter valve with diverter spout-backflow protection provided by two integral check valves in handshower
- ADA Compliant diverter handle
- 1.5 USGPM (5.7 L/min) Handshower, unless Optional Handshower #2 is selected
- Spout: - 1/2" IPS metal spout with pull up diverter
- Handle#: 3 Lever Blade Handle ADA compliant-57 mm (2.24")
- Optional 1753 mm (69") Long Chrome plated Brass Double Spiral Hose (replaces standard hose)
- 3-Function Touch-Clean Showerhead, Arm & Flange, 2.0 USGPM (7.6 L/min.)
- Optional 914mm(36") stainless steel slide bar to replace standard bar


## **OPERATION:**

Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced March 09, 2012.



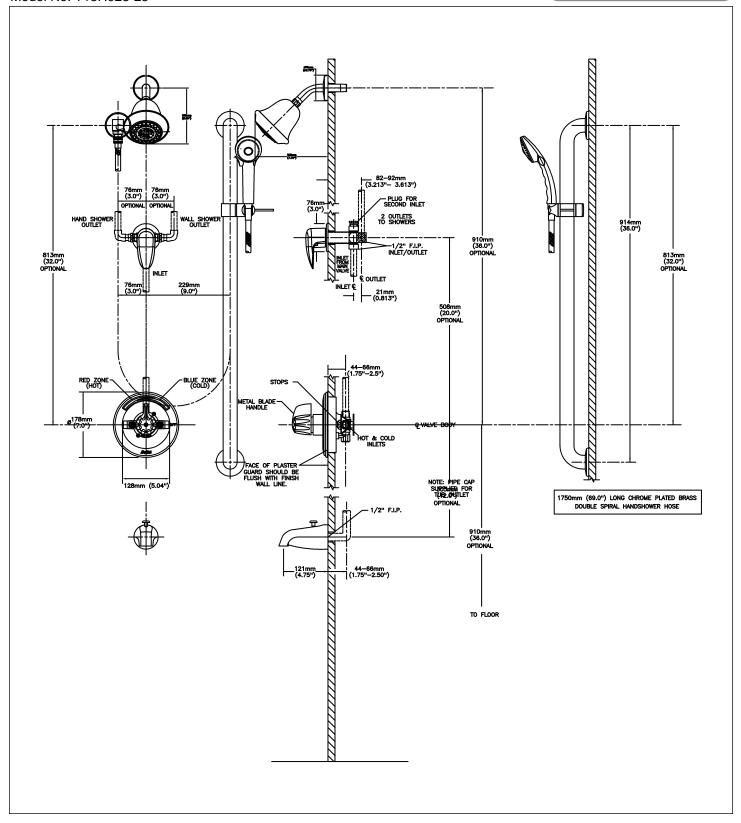

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced March 09, 2012.