

Distilled Water Faucets

Deckmount Pure Water Faucet

Model No: W6635DI

COMPLIES WITH:

• (Contact Delta Representative for State and/or Local Approvals)

SPECIFICATION:

- Deckmount pure water faucet complete with W6629 Celcon valve with 6 serration hose end
- Engineered from modern materials to keep distilled water pure. Celcon control valve is chemically inert to most common laboratory chemicals (not hydrochloric or sulphuric acids)
- Operates up to 414 kPa (60 psi) line pressure
- Flexible diaphragm seat is moulded to the stem for positive action, seal and long life. Valve diaphragm and entire waterway is inert Tygon material with a Celcon union inlet connection, preventing contact of water with metal components.1/2" M.I.P. size
- Double action spring loaded handle provides self-closing and full lock-open flow operation
- All goosenecks are heavy-duty 3/8" I.P.S. brass pipe, with inert lining Tygon tubing. Standard goosenecks have 152 mm (6") diameter bend.
- Smooth, glossy chrome plated finish, allows for ease of cleaning
- Forged brass turret with vandal resistant locking pins to prevent damage to mounting surface (can be removed in field if not required)
- Raised lockwasher to provide positive gripping during installation
- Deckmount Pure Water Faucet
- Chrome Finish
- Spout: 6" Radius Gooseneck(standard)
- Outlet: Self-closing and lock-open celcon control valves
- Assembled Shank:
- Indexed For: DI Deionized Water(White)


OPERATION:

• Products not intended for potable water

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced April 19, 2021.



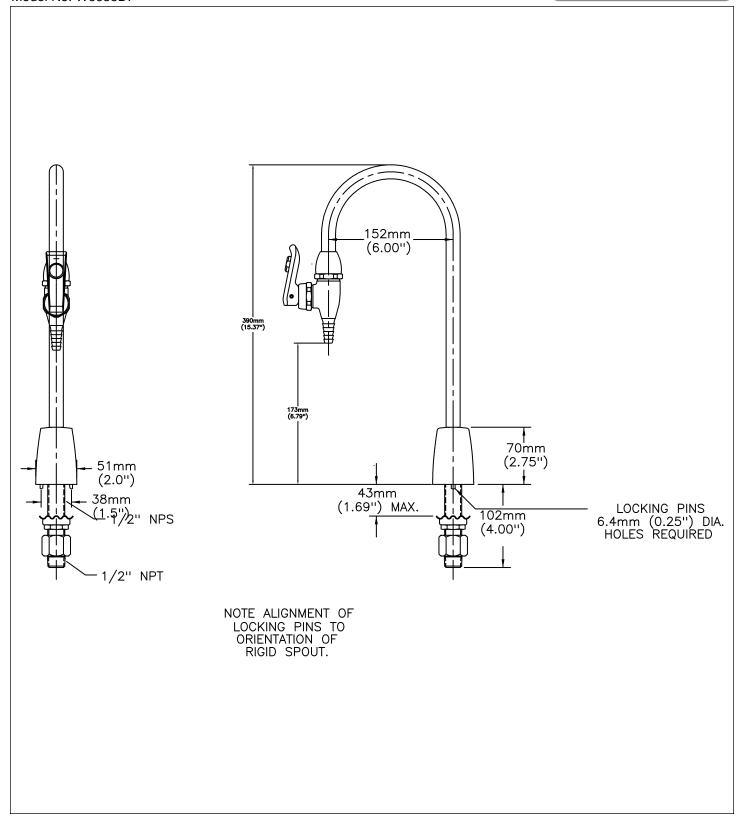

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced April 19, 2021.