

Mixing Faucets

4" center Deckmount mixing faucet with rigid/swivel spout

Model No: W6720-10-D

COMPLIES WITH:

- CSA approved to CAN/CSA B125 with compliance to ANSI/ASME A112.18.1M.
- Meets ADA 5lb. force pressure requirements when optional 2 3/4" lever blade or 4" and 6" blade handles are used.
- In-line Vacuum Breaker tested and certified under ANSI/ASSE Std. 1035 "Laboratory Faucet Vacuum Breakers".
- Listed by IAPMO.
- CSA approved to CAN/CSA B64.1.7
- Angle Vacuum Breaker tested and approved in conformance with ASSE Std. 1001 and ANSI A112.1.1 and CSA B64.1.1
- (Contact Delta Representative for State and/or Local Approvals)
- Certified under ANSI/ASSE Standard 1001 and CSA Standard B64.1.1

SPECIFICATION:


- 102mm(4") center deckmount faucet
- Two Handle
- Heavy duty cast brass body
- Metal hold-down package
- Field installation of spout as rigid or swivel
- Teck Lab compression structures Chrome plated brass renewable seats
- Polished chrome plate finish Spout: R23 - 152 mm (6") Angle VB Spout
- Outlet: w/ 1/4" ID Serrated Nozzle Outlet(No Dash or -10 series) Handle#: D - 102 mm (4") Blade Handles, Sanitary Hoods, ADA Compliant
- Indexed For: CW/HW Cold & Hot Water(Green & Red)

OPERATION:

Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. leasurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area

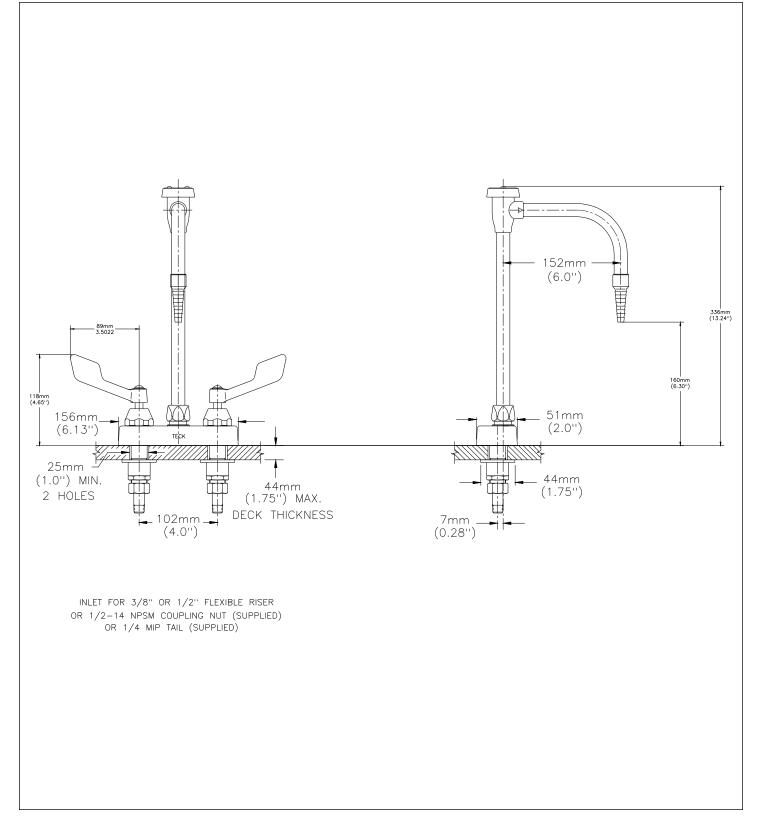

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area.