



see what Delta can do™

# HAND SHOWER

- H<sub>2</sub>Okinetic® Hand Shower
- 29" Wall Bar or Wall Mount
- Certified Dual Check Valves

## STANDARD SPECIFICATIONS:

- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Hand held shower with three settings - H<sub>2</sub>Okinetic® PowerDrench® Spray, Massage Spray, pause is a non-positive shut-off
- Wall bar with adjustable height hand shower mount (51308 only)
- Adjustable wall mount for hands-free showering (55433 only)
- 60"-82" (1524 mm - 2083 mm) metal stretchable hose (51308, 55433)
- ADA compliant hand shower when installed per accessibility guidelines of the act


## WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Electronic Parts and Batteries (if applicable) - 5 years from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.); or for commercial purchasers, 1 year from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.). No warranty is provided on batteries.
- Please go to [www.deltafaucet.com](http://www.deltafaucet.com) for the complete details of our limited warranty.



## COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ◆
- ASME A112.18.3
- ICC/ANSI A117.1 - Applies to 59433-PK only
- EPA WaterSense®

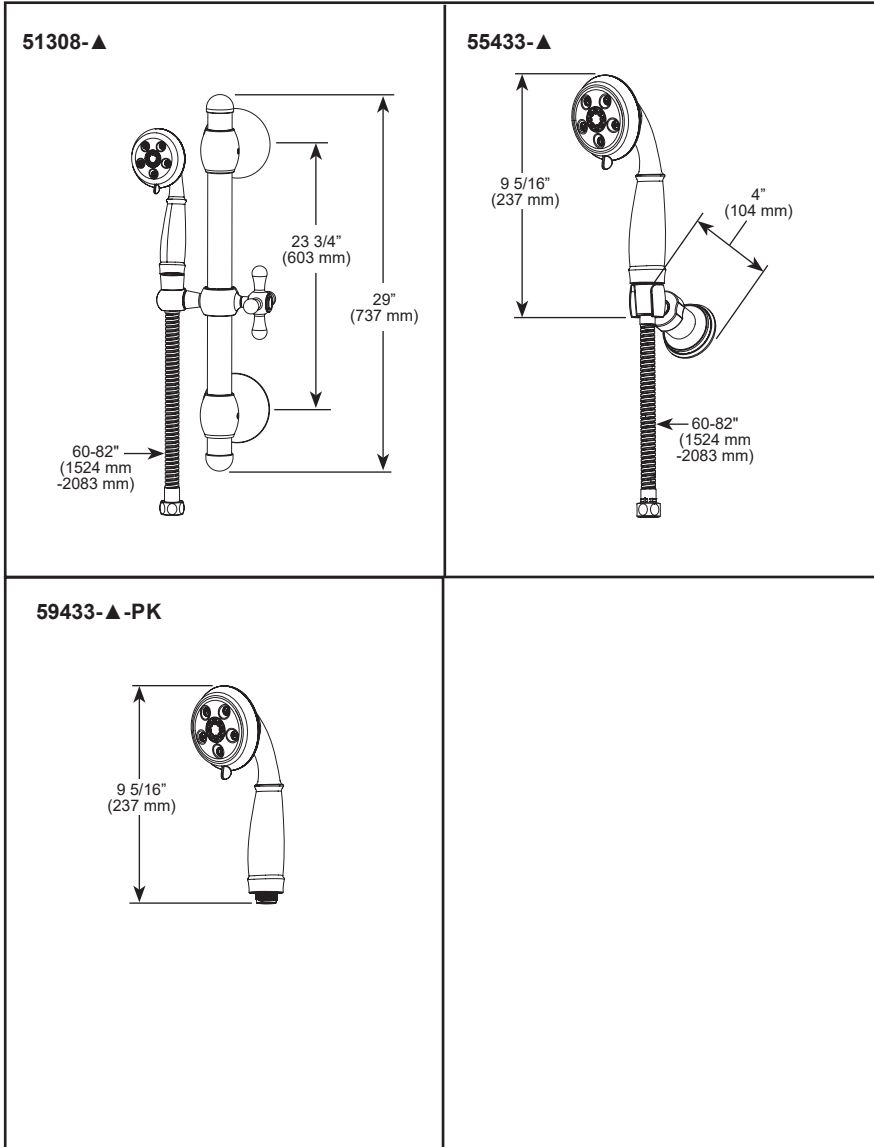

▲ Designate proper finish suffix

- ◆ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.