

# KITCHEN FAUCETS

Submitted Model No.: \_\_\_\_\_  
 Specific Features: \_\_\_\_\_


- Single Handle Deck Mount
- Single or 3 Hole Sink Applications
- 8" Centerset
- 2-Function Pull-Out

### STANDARD SPECIFICATIONS:

- 8" (203 mm) centerset.
- 8 3/4" (223 mm) long, 8 29/32" (226 mm) high pull-out spout swings 120° and operates in either spray or aerate mode. Spout is connected to valve body with a 59" (1499 mm) hose.
- All operating parts shall be replaceable from the top.
- 1/2" -14 NPSM threaded male inlet adapters.
- Lever handle control mechanism is the rotating stainless steel ball type with replaceable non-metallic seats.
- Control handle shall return to neutral position when valve is turned off.
- Integral double check valves in spout.

### WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the Original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all Industrial, Commercial and Business applications.

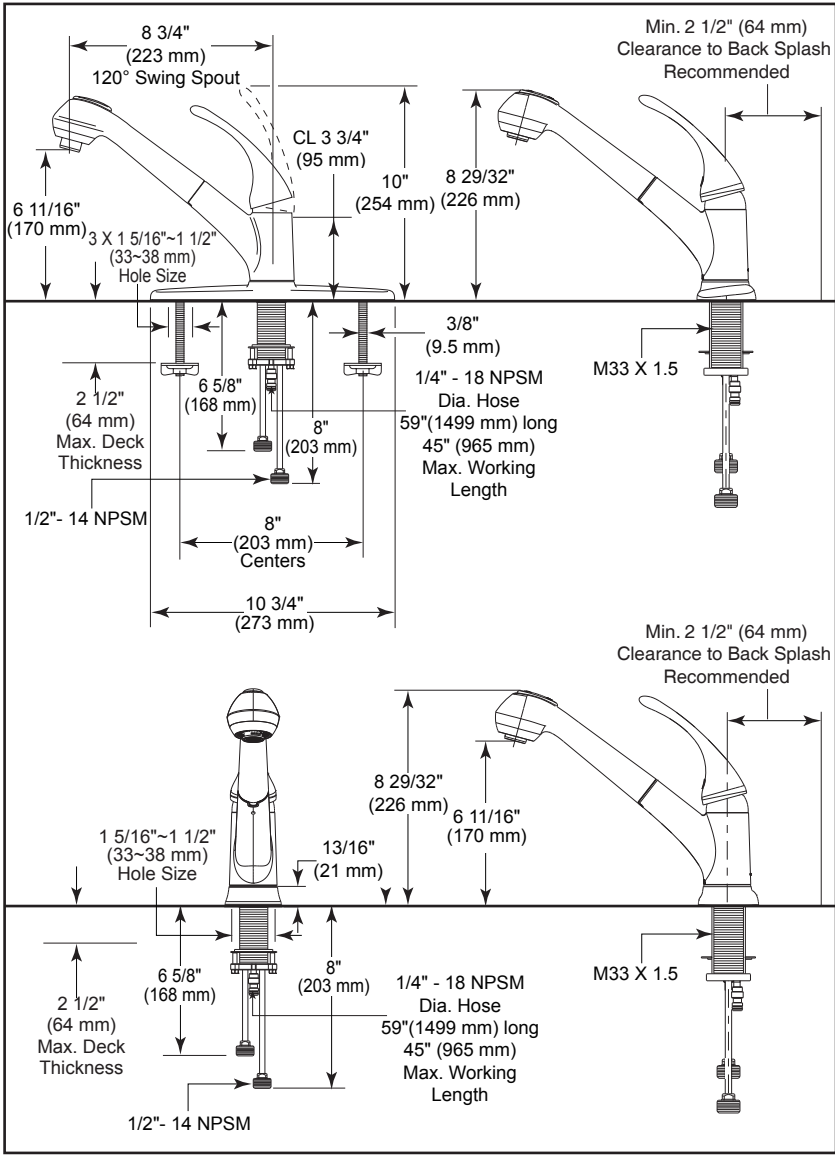


▲ Designate proper finish suffix



### COMPLIES WITH

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC / ANSI A117.1
- CSA Certified

Verified compliant with 0.25% weighted average Pb content regulations.

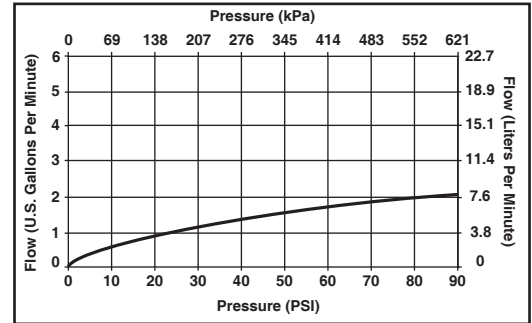

55 E. 111th Street, Indianapolis, Indiana 46280  
 350 South Edgeware Road, St. Thomas, ON N5P 4L1  
 © 2011 Masco Corporation of Indiana

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See full-line price book or www.specselect.com for finish options and product availability.