

Tub and Shower

TRIM ONLY for Tub and Single shower Unit\nRequires separate order of R10000-UNWS Rough-in

SPECIFICATION:

- Polished chrome plated finish
- Pressure Balance cartridge
- Limit stop for pre-setting Maximum temperature
- Integral checks in the cartridge prevent crossflow between Hot and Cold water inlets
- Non-Removable Blue/Red visual cover indicator for Cold, Mixing and Hot handle positions
- Spout: - 1/2" IPS metal spout with pull up diverter
- Handle#: 2 Metal Lever Handle ADA compliant 85mm (3.33")
- #6 Shower 30° Vandal Resistant Cast Wallmount Showerhead
- #6 Shower Flow Rate MAX: 1.5 GPM @ 80 PSI (5.7 L/min @ 552 kPa)
- #6 Shower Flow Rate MIN: 1.4 GPM @ 45 PSI (5.3 L/min @ 310 kPa)

OPERATION:

Not Available

(Dimensional drawing on following page)

•

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced July 22, 2013.




Model No: T13H262

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Pressure Balance Valve ASSE 1016
- Pressure Balance lever handle ADA compliant to ICC/ANSI A117.1/ADA
- (Contact Delta Representative for State and/or Local Approvals)





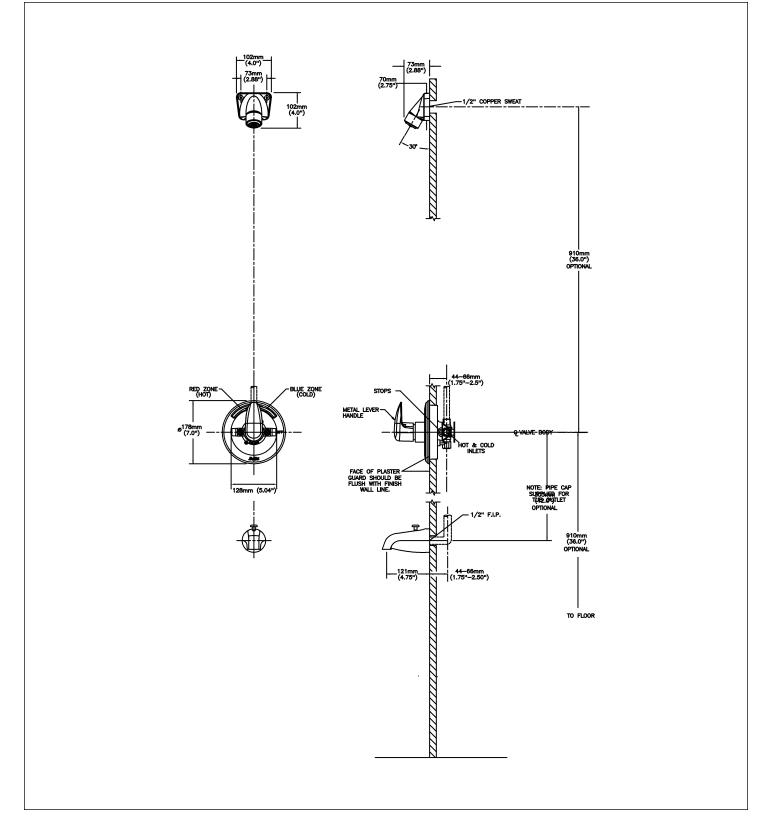

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced July 22, 2013.