

Mixing Faucets

Deckmount mixing faucet with rigid/swivel spout - SINGLE hole mount - 1.5" max. diameter hole

Model No: W6760-9-R7

COMPLIES WITH:

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- (Contact Delta Representative for State and/or Local Approvals)
- In-line VB tested and approved in conformance with ASSE 1035 "Laboratory Faucet Vacuum Breakers". CSA certified to B64.7



SPECIFICATION:

- All brass body with vandal resistant anti-rotation locking pins to prevent damage to counter top (can be removed in field if not required)
- · Assembled shank with brass locknut
- Stainless steel flexible braided hoses with 3/8" compression connections
- Teck Lab compression structures
- · Chrome plated brass renewable seats
- Deckmount mixing faucet with rigid/swivel spout SINGLE hole mount -1.5" max. diameter hole
- Chrome Finish
- Spout: R7 Gooseneck spout-9.0" radius-12.7" height(unmounted)-Standard rigid/swivel field installation unless LS Limited swing option selected-Vandal resistant.090" wall thickness
- Outlet#: 9 w/ 1/4" ID Serrated Nozzle Outlet Plus In-Line Dual Check Vacuum Breaker(-9 series)
- Handle#: B Two Arm Metal
- Indexed For: CW/HW Cold & Hot Water(Green & Red)


OPERATION:

Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced July 22, 2013.



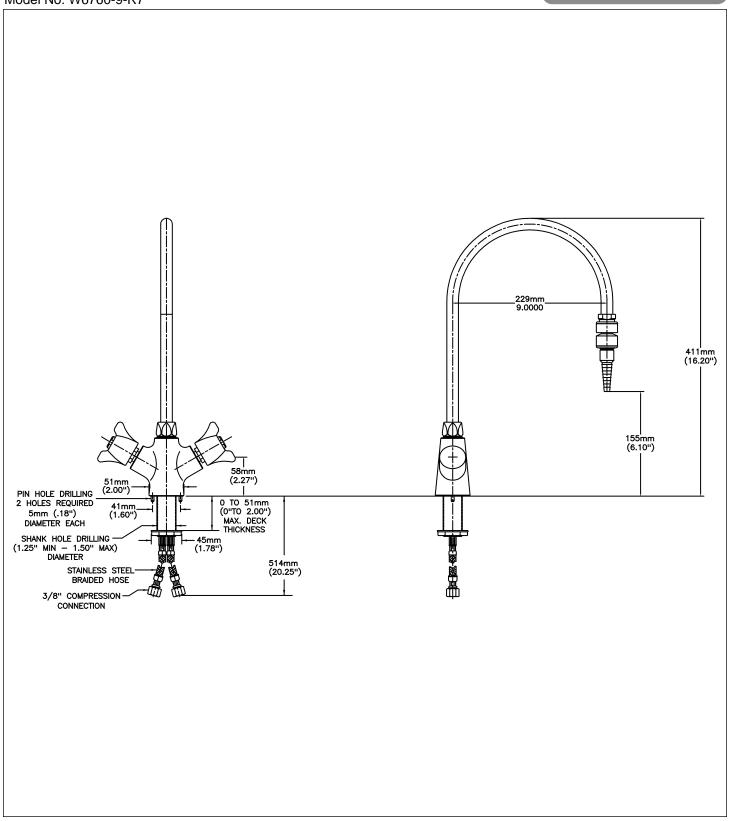

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced July 22, 2013.