



EASTPORT 3LT 52 H BOWL PENDANT (Item #573139)

ASSEMBLY/INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock

GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

Turn off the power at fuse or circuit breaker

1. Gently take all parts out of the package, lay them on a smooth surface and unscrew the WIRE NUT. Attach MOUNTING BAR to the OUTLET BOX using (2) MOUNTING SCREWS.
2. Pull wires through STEM A, WIRE ROPE RING, STEM B and STEM C into CANOPY. Thread PIPE NIPPLE into STEMS. Attach STEM C to SWIVAL located at bottom of CANOPY and Attach STEM A to COUPLING and carefully pull excess wires through CANOPY.
NOTE: STEM A and STEM B are 16" H, STEM C is 12"H.
3. Make wire connections with WIRE NUTS:
A-Connect the black wire from the Fixture to the black supply wires.
B-Connect the white wire from the Fixture to the white supply wires.
C-Attach the fixture ground wire to the CROSS BAR with the GROUND SCREW. Then connect it to the supply GROUND WIRE with the WIRE NUTS. Carefully tuck wires back into the OUTLET BOX.
4. Attach the CANOPY over the OUTLET BOX, tighten the NUT on to the FIXTURE SCREWS.
5. Install BULBS with TYPE A MAX. 60W wattage (not included).
6. Locate GLASS SHADE on the GLASS RING, and use a screwdriver to attach GLASS RING on CLIPS using CLIP SCREWS.

Turn on the power at fuse or circuit breaker.

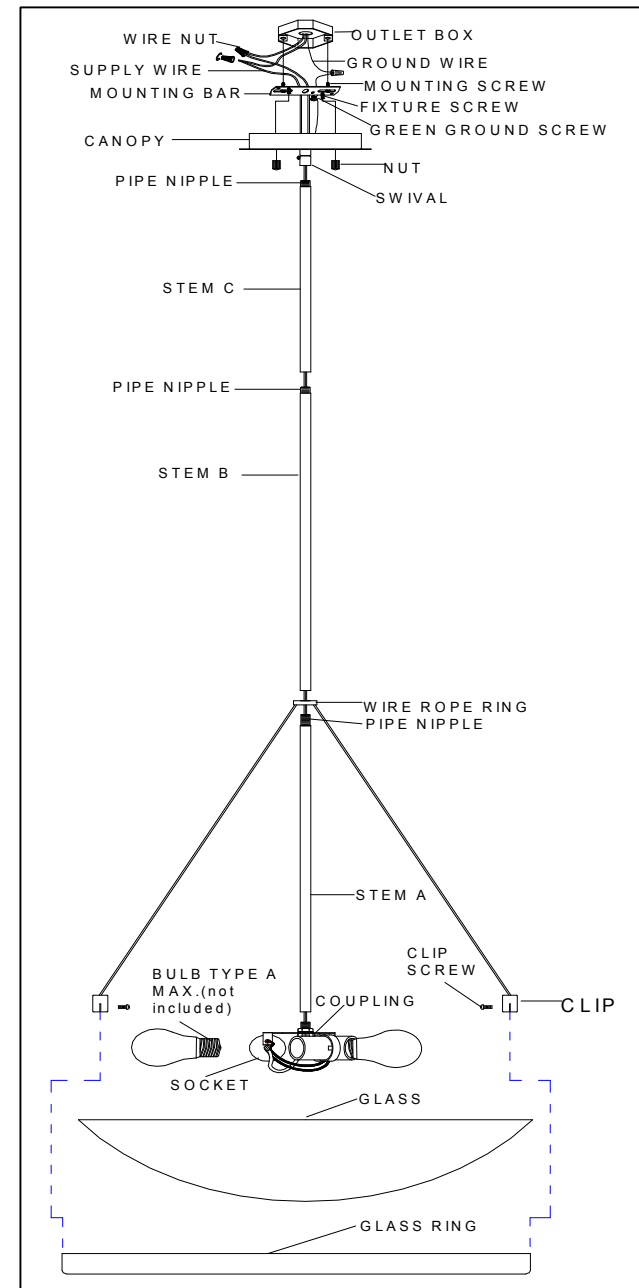

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN.**

Customer Service: 1-800-558-8700