

ASSEMBLY INSTRUCTIONS


SKU#514562, 514570

NOTE: Please consult a qualified electrician if you are not certain of the installation.

CAUTION: Before starting the installation or service, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse box.

1. Carefully unpack the fixture, lay out all parts on a clean surface.
2. Attach the mounting strap to outlet box using provided outlet box screws.
3. Tie ground wire from outlet box and from fixture to the ground screw on the mounting strap. Connect white wire from fixture to white wire (neutral wire) from supply circuit. Connect black wire from fixture to black wire (live wire) from supply circuit. Cover connections using provided wire connectors.
4. Place fixture body against wall allowing nipple to pass through the center hole in the wall plate, and secure fixture to wall with lock nut.
5. Place the shade over the socket.
6. Install the bulb (sold separately).
7. Reconnect the power.

This light only can be installed in an uplight position.

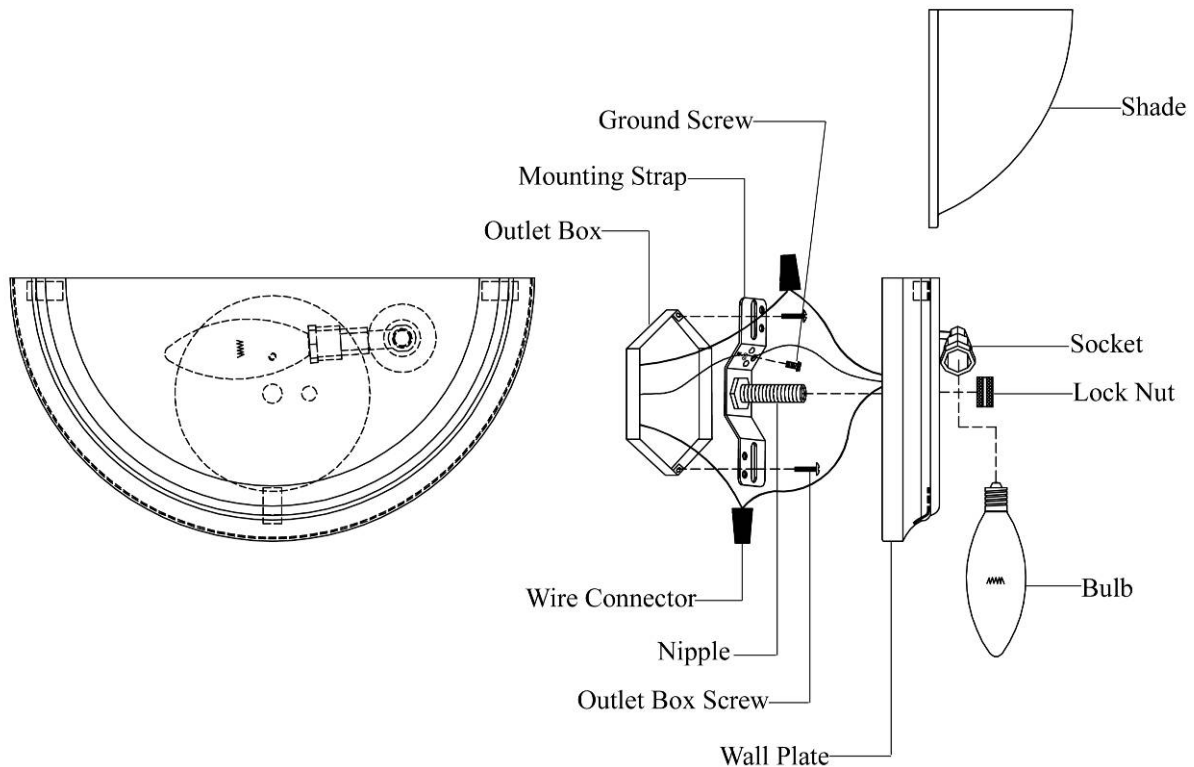

dh[®]
DESIGNHOUSE