



MILLBRIDGE SWAG LIGHT ASSEMBLY/INSTALLATION INSTRUCTION

#517565, 517664

Note: Please consult a qualified electrician if you are not certain of the installation.

Caution: Before starting the installation, disconnect the power by turning off the circuit breaker or removing the fuse at fuse box.

Pre-installation: Slide the fixture loop down along wires and thread securely onto the nipple on top of the fixture assembly. Use a pair of pliers to open end link of chain. Attach the end of chain to the loop at the top of the fixture.

There are two options for you to install the lamp:

Option 1--Portable wire installation

Carefully unpack the fixture and lay out all parts on a clear surface.

Note: Cut off the fixture copper ground wire.

A. For plaster or plaster board ceilings

1. Drill a hole in the ceiling to the same diameter as the closed flaps of the enclosed toggle bolt assembly (A).
2. Insert flaps and bolt into the ceiling with the toggle bolt protruding through the ceiling and lock the assembly by threading on the hook as shown.
3. Drape your chain to second hook or let it hang straight.

B. For wood or acoustic board ceilings (minimum thickness 1-1/2 Inch)

1. Select a place on the ceiling where a wood beam exists.
2. Thread the wood screw into hook (B).
3. Screw the assembly into the wood beam.
4. Drape your chain to second hook or let it hang straight.
5. Install the bulbs (not included).
6. Once chain & wire are arranged, plug into outlet & turn on the switch and enjoy.

Option 2--Fixed wire installation

1. Carefully unpack the fixture and lay out all parts on a clear surface.
2. Cut off the plug and switch at point "A" with wire cutters.
3. Attach mounting strap to outlet box using outlet box screws.
4. Use a pair of pliers to open end link of chain and attach it to screw collar loop.
5. Weave electrical wires and ground wire up chain, through screw collar loop, and canopy. Unscrew ring from screw collar loop, slide the ring and then the canopy over the chain.
6. Connect the labeled wire unlabeled to black wire from supply circuit. Connect the unlabeled wire to white wire from the supply circuit. Cover the connections using the wire connector provided. Tie the ground wire from the fixture and from outlet box to ground screw on the mounting strap.
7. Raise the lamp to the ceiling and screw the nipple down in screw collar loop, tighten ring.
8. Install light bulbs (sold separately).
9. Restore electricity at main fuse or circuit breaker box.

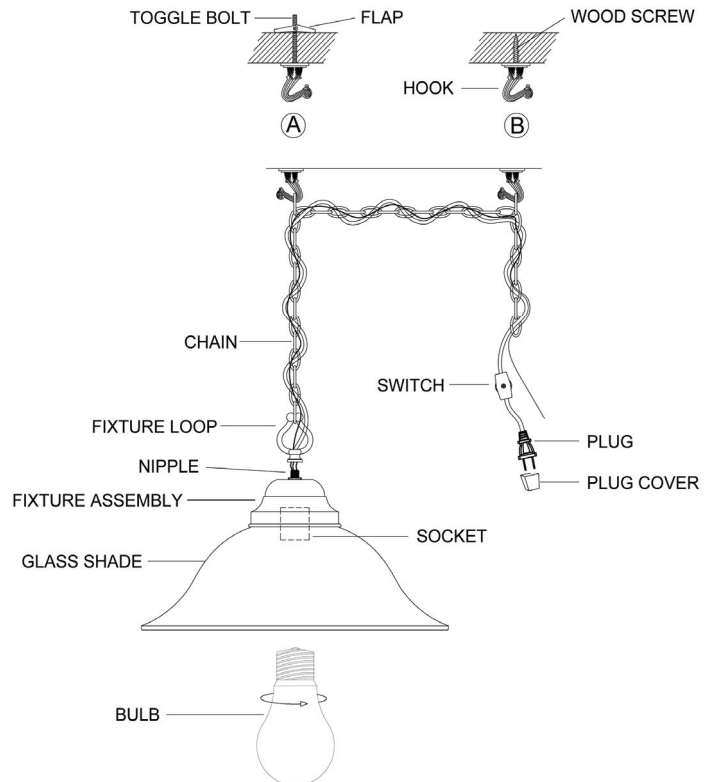


Fig.1

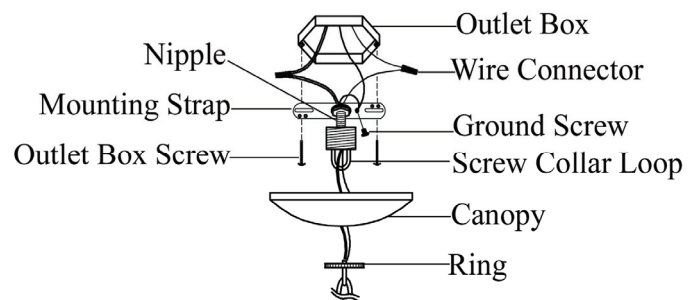


Fig.2



Fig.3

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN.**

Customer Service: 1-800-558-8700