




Project:  Date:   
Prepared By:   
Comments:

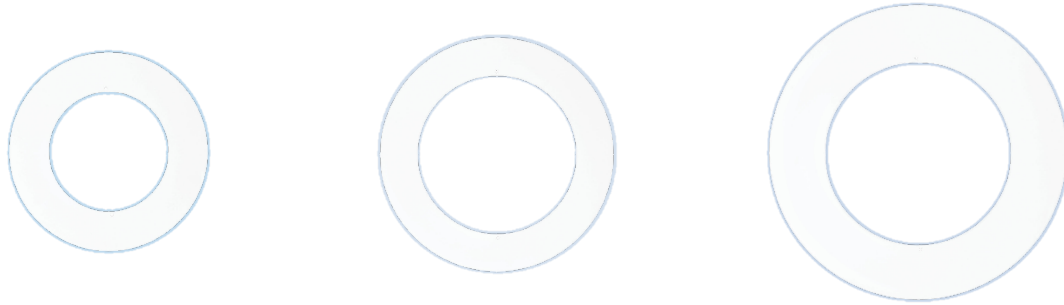

## FEATURES

- Reduce Ceiling Hole to Fit Retrofit Downlight Unit Being Installed
- Heavy-Duty Metal Construction - Built to Provide Long-Lasting Durability
- Paintable to Match Fixture or Ceiling Finish

## INSTALLATION INSTRUCTIONS

- Remove Retrofit Downlight or Trim from Cut-Out hole on the Ceiling
- Fit Goof Ring through the Top Side of the Retrofit Downlight until it sits Against Trim's flange
- Reinstall the light back into the hole now with the ring covering the gaps

## GOOF RING DIMENSIONS

- Goof-Ring thickness – 1.1 mm
- GOOFRING06 / 6" Goof Ring – Inside Diameter 6.3" / Outer Diameter 8.9"
- GOOFRING08 / 8" Goof Ring - Inside Diameter 8.5" / Outer Diameter 12.5 "
- GOOFRING10 / 10" Goof Ring - Inside Diameter 8.87" / Outer Diameter 14.19"

