

OUTDOOR INFRARED WALL-MOUNTED NATURAL GAS HEATER

Sleek and powerful, our Outdoor Infrared Heaters can enhance any patio space instantly to give you heat on demand. The stylish black DGR model is a luxury upgrade in outdoor spaces with a natural gas line installation and permanent wall mount. Made of durable stainless steel and equipped with a highperformance ceramic burner that can heat up to 31,500 BTUs per hour. Extend your living space into your backyard all year round.


BENEFITS


- Flexible space-saving installation options: wall-mount bracket allows for multiple mounting angles, optional ceiling-mount pole sold separately, or an all-in-one package is available with the portable propane stand
- Innovative design provides an easy setup with some assembly required; natural gas line required for wall or ceiling mount
- High-performance ceramic burner 31,500 BTU
- World-class wind protection up to 9.9 Mph/16 Kph
- Optional heat shield (not included) available for low clearance mounting, providing 12" (30.5 cm) overhead clearance
- Suitable for residential and commercial applications

APPLICATIONS

Patios | Balconies | Outdoor Living Spaces | Sunrooms | Gazebos | Common Areas

HEAT AREA











4-tile commercial ceramic burner



Wall bracket and gas Electronic finger pull Protective grille and regulator included



turn-off



for easy ignition and reflector included





SPECIFICATIONS

Heater Type	Infrared Natural Gas
BTUs	31,500 BTU/hr
Color	Black
Finish	Finished with a high temperature paint coating
Heating Element	4-tile commercial ceramic burner
Construction	430 grade stainless steel
Controls & Wiring	Finger pull, electronic ignition, with On/Off lever control
Installation	Wall Mount (brackets included with DGR32WNG) Extended ceiling mount pole (optional accessory) Requires separate natural gas line installation
Warranty	1-year

ORDERING GUIDE

Cat. No.	Installation	Fuel	BTU	Weight (kg/lbs.)
DLWGR32WNG	Wall or ceiling-mount	Natural Gas	31,500	5/11

ACCESSORIES


Cat. No. D	escription
------------	------------

DGRSHIELD Heat shield reduces overhead minimum clearance from 20" to 16" (50.8 cm to 40.6 cm)

DGRPOLE-WM Ceiling mount extension/mounting pole



CLEARANCES

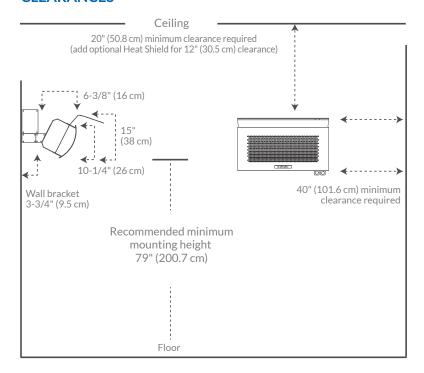



Order DGRPOLE-WM for optional ceiling mount