


# Docking Drawer®

Safety Interlock Outlet with  
Smoke and Heat Sensor Tear Sheet

6015-4000W

SHUTS OFF  
**POWER**  
at first sign of  
**smoke**  
or heat

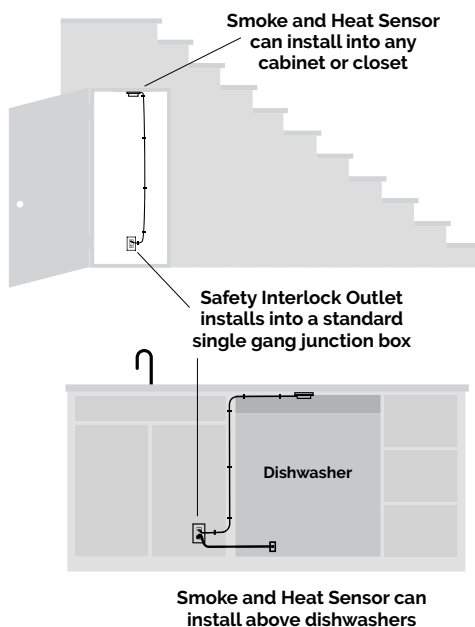

Docking Drawer's 15 amp Safety Interlock Outlet is a single gang electrical outlet featuring one NEMA 5-15 receptacle and one interlock switch connector. The Smoke and Heat Sensor mounts inside of enclosed spaces to de-energize the outlet if smoke or heat is detected. Possible applications include:

- 3D Printers
- Dishwashers
- Battery Charging Stations
- Closets or Enclosed Spaces
- Garages
- Dorm Rooms
- Alongside Docking Drawer Outlets
- Or any place where devices are plugged in and left unattended

### Outlet Specs




**Interlock Switch Connector**

**LED Indicator**

**NEMA 5-15 Receptacle**

**Mounting Bracket**

Input	100 - 125 VAC, 50/60 Hz
AC Output	15A@125VAC, 1875 VA MAX
DC Output	24VDC @ 100mA MAX
DC Power Supply	IEC Class II
Number of Receptacles	(1) NEMA 5-15R
Tamper Resistant	Yes
LED Indicator	Yes
Conformance	 UL60730, UL498, EN61558, EN60730, EN62386
Environmental	-10 °C to +50 °C, non condensing
Warranty	2 Years

### Smoke and Heat Sensor Specs



**Smoke and Heat Sensor**

Installs in enclosed spaces like closets and cabinets with 4 screws.

**Safety Interlock Outlet Connector**

Connects to the Safety Interlock Outlet.

**Low Voltage Cable**  
10ft long

Type of Sensor	Smoke and Heat Sensor
Cable	10 ft low voltage cable
Sensor Length	<i>between mounting holes</i> : 3.4" (86.1 mm)
Sensor Width	<i>between mounting holes</i> : 1.8" (46.5mm)
Sensor Height	1" (25.4mm)
Smoke Sensitivity	1.06 ± .26% per foot
Temperature Alarm	Fixed set point 54°C ± 2°C (129°F ± 4°F) and ≥ 10°C (18°F) per minute temperature rise
Audible Alarm	Yes
LED Indicator	Yes
Mounting Details	Use 4 screws to mount near the appliance or device that will generate smoke or heat, positioning as high up as possible or above the smoke or heat source.
Conformance	The Safety Interlock Outlet is ETL approved as an Interlock device. The Smoke and Heat Sensor is not UL or ETL approved and is not for life safety. The Smoke and Heat Sensor is intended for supplementary protection and does not take the place of an approved smoke detector, as required by code.
Warranty	2 Years

### Resources & Downloads

Docking Drawer provides all of the necessary resources to plan a Safety Interlock Outlet installation. Download Installation Manuals at [dockingdrawer.com/downloads](https://dockingdrawer.com/downloads)

### Ready to Order?

Source directly from Docking Drawer or from one of our distribution partners. [Learn more.](#)

**Project Name:**

**Where to Source:**  Docking Drawer  Distributor

Freight - FOB San Ramon    Warranty - 2 Years    [Terms & Conditions](#)