

MEM Wall-mounted single-lever mixer without drain - Chrome

MEM

36 867 782 Product version from 4/1/2025



- 4-7/8" Projection
- Rigid spout
- Rectangular aerated stream
- Spout hole diameter 1-1/2"
- Hole diameter single-lever mixer 2-1/4"
- 3-1/8" x 2-3/8" flange for spout
- Flange for mixer 3-1/8" x 3-1/8"
- Water flow rate limited to max. 1.2 gpm
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB (ADA)

(ADA)

	Chrome	36 867 782-00 0010
	Brushed Platinum	36 867 782-06 0010
	Platinum	36 867 782-08 0010
	Brushed Light Gold (PVD)	36 867 782-27 0010
	Brushed Durabronze (23kt Gold)	36 867 782-28 0010
	Brushed Dark Brass (PVD)	36 867 782-39 0010
	Brushed Bronze (PVD)	36 867 782-42 0010
	Brushed Dark Platinum	36 867 782-99 0010

Required article




- Rough for wall-mounted faucet -** 35 860 970-90 0010
- Min. rough in depth 3"
 - Max. rough in depth 3-3/4"
 - Rough can be rotated to position the lever on top or to the left of the spout.

MEM Wall-mounted single-lever mixer without drain - Chrome

MEM

36 867 782 Product version from 4/1/2025

mm [inches]

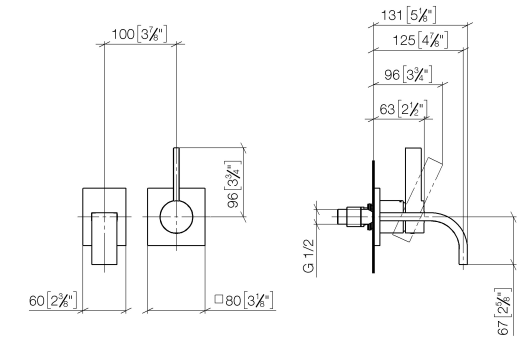


Codes & Standards

ADA	ASME A112.18.1	California Energy Commission (CEC)	cUPC
EPA WaterSense	NSF372	NSF61	WaterSense

Certificates and sustainability

IAPMO_6397	IAPMO_N-4976	IAPMO_4976 (	IAPMO_8834	EPD-DOR-20230287 -IBA1-EN Environmental.prod uct-declarat
------------	--------------	--------------	------------	--

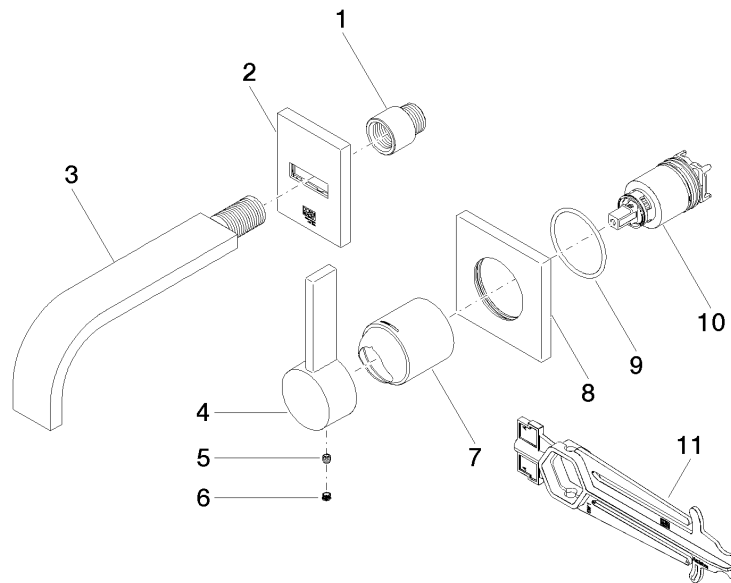

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
4	09 20 78 058-00	Handle Lever 23 x 26 x 119 mm - Chrome	1.00	10
7	09 11 02 288-00	Hood Ø 45 x 55 mm - Chrome	1.00	10
8	09 27 78 039-00	Escutcheon 80 x 80 x 9 x Ø 45,7 mm - Chrome	1.00	10
2	90 27 78 055 00-00	Escutcheon For wall spout 80 x 60 x 9 mm - Chrome	1.00	10
10	90 15 05 064 01 90	EHM cartridge With adapter plate incl. mounting wrench Ø 35 mm x 58,6 mm -	1.00	-
Spare part can no longer be ordered, please order the replacement item				
9015050460190		EHM cartridge with cartridge insert , torque wrench Ø 35 mm x 58,6 mm -		
6	90 31 20 109 00 90	Plug -	1.00	2
5	90 31 11 030 00 90	Mounting bracket Threaded pin With hex socket With cup point M5 x 5 mm -	1.00	2
11	90 30 09 064 00 90	assembly wrench For cartridge nut -	1.00	2
3	90 28 22 357 01-00	Outlet - Chrome	1.00	10
9	90 14 10 049 00 90	O-Ring 45,69 x 2,62 mm -	1.00	2
1	09 24 03 072 10 90	Extension 1/2" x 20 mm -	1.00	2