

30 010 809 Product version from 4/1/2024



- 6" Projection
- Rigid spout
- Round aerated stream
- Adapter, male thread 3/4"
- 1-3/8" hole diameter
- Flange diameter 2-3/8"
- Water flow rate limited to max. 1.2 gpm
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

(ADA)

	Chrome	30 010 809-00 0010
	Brushed Platinum	30 010 809-06 0010
	Platinum	30 010 809-08 0010
	Dark Chrome	30 010 809-19 0010
	Brushed Light Gold (PVD)	30 010 809-27 0010
	Brushed Durabrass (23kt Gold)	30 010 809-28 0010
	Brushed Dark Brass (PVD)	30 010 809-39 0010
	Brushed Bronze (PVD)	30 010 809-42 0010
	Brushed Dark Bronze (PVD)	30 010 809-43 0010
	Brushed Champagne (22kt Gold)	30 010 809-46 0010
	Champagne (22kt Gold)	30 010 809-47 0010
	Brushed Dark Platinum	30 010 809-99 0010

Recommended article




Concealed wall elbow -

- Min. rough in depth 3-1/2"
- Max. rough in depth 6-3/8"

35 085 970-90
0010


mm [inches]

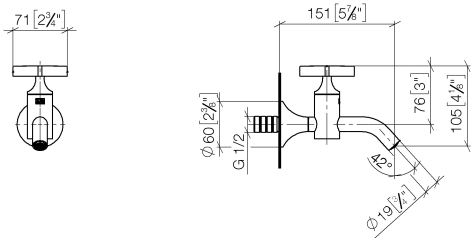

Codes & Standards			
ADA	ASME A112.18.1	California Energy Commission (CEC)	cUPC
EPA WaterSense	NSF372	NSF61	WaterSense



Certificates and sustainability				
IAPMO_6397	IAPMO_N-4976	IAPMO_8834	IAPMO_4976 (	EPD-DOR-20230287 -IBA1-EN Environmental.prod uct-declarat

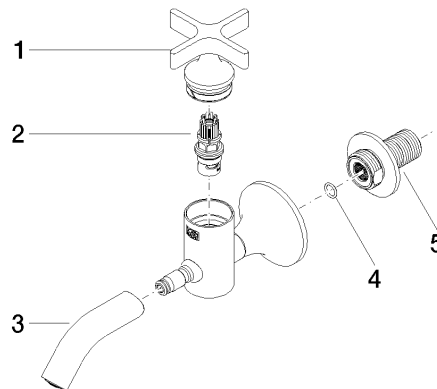

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
3	90 28 22 381 01-00	Outlet - Chrome	1.00	10
5	09 24 03 269 90	Nipple Ø 46 x 48,50 mm -	1.00	2
1	90 20 66 025 00-00	Handle complete Neutral - Chrome	1.00	10
2	90 90 03 175 00 90	Cartridge Lifetime Mix 90° Ø 19 x 48 mm -	1.00	2
4	90 14 10 060 00 90	O-Ring 8,0 x 1,5 mm -	1.00	2