

CYO Five hole tub set for deck-mounted tub installation - Chrome

CYO

27 523 821




- 6-5/8" Projection
- Hand shower set: Standard spray
- Hand shower set with anti-scale technology
- Integrated diverter
- Total height 7-3/4"
- Height to aerator/spout outlet 5-1/4"
- Spout hole diameter 1-1/4"
- Valve hole diameter 1-1/4"
- Hole diameter for hand shower set 1-1/4"
- Hand shower set with flange 2-3/8" x 2-3/8"
- Valve with flange 2-3/8" x 2-3/8"
- Metal shower hose 66-7/8" with anti-twist device
- Water flow rate limited to max. 6.3 gpm
- Handshower flow rate max. 1.8 gpm

Internal backflow preventer.


NOTE: Local building codes may require the use of an anti-scald device. Please refer to remote pressure balance valve (35 914 970 90)

	Chrome	27 523 821-00
	Brushed Platinum	27 523 821-06
	Dark Chrome	27 523 821-19
	Brushed Durabronze (23kt Gold)	27 523 821-28
	Brushed Dark Platinum	27 523 821-99

27 523 821

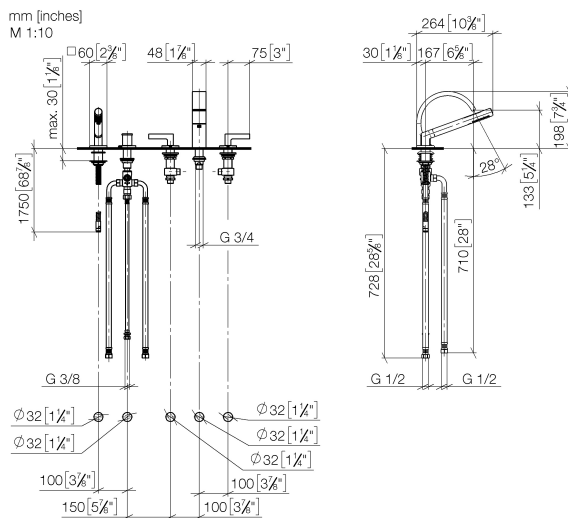

Flow rate chart

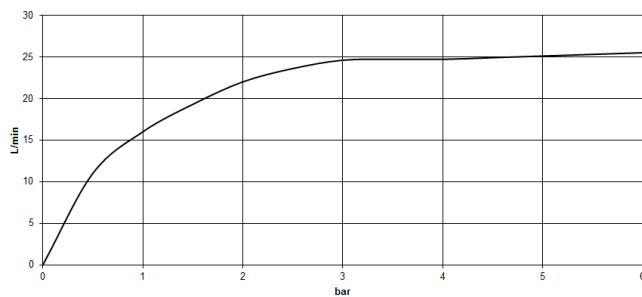

Codes & Standards

ASME A112.18.1	California Energy Commission (CEC)	cUPC	DIN 4109
ISO 3822	Ü-Zeichen		



CYO Five hole tub set for deck-mounted tub installation - Chrome

CYO

27 523 821

Certificates and sustainability

IAPMO_4976


LGA_38

CYO Five hole tub set for deck-mounted tub installation - Chrome

CYO

27 523 821

Parts for other
finishes can be found
here: Brushed
Platinum

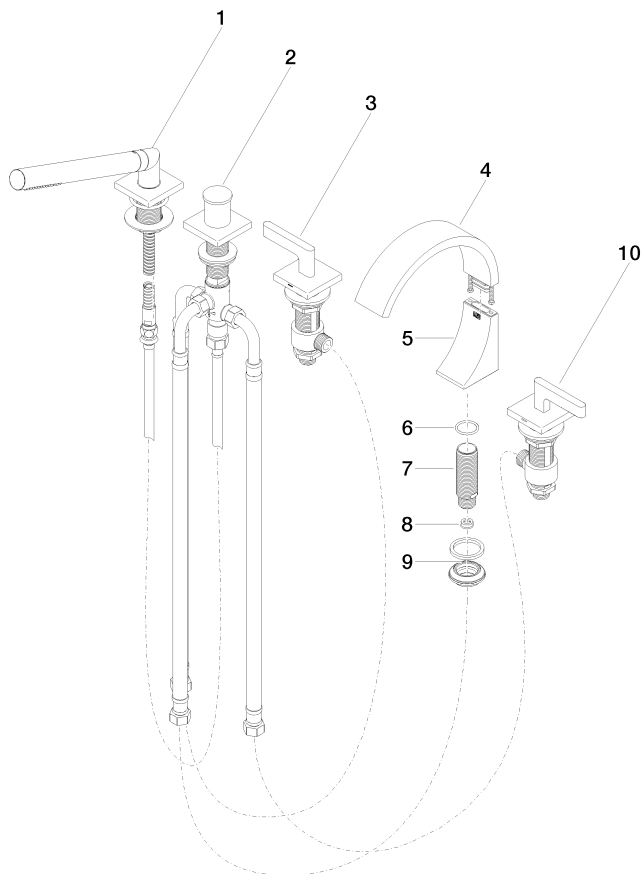

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
5	90 19 70 011 00-00	connection	1.00	10
10	20 000 716-00	Deck valve counter-clockwise closing cold - Chrome	1.00	10
6	09 14 10 009 90	seal	1.00	2
7	09 30 01 117 90	connection	1.00	2
2	29 140 670-00	Two-way diverter for deck-mounted tub installation - Chrome	1.00	10
8	09 23 01 057 90	flow reducer	1.00	2
3	20 000 715-00	Deck valve clockwise-closing hot - Chrome	1.00	10
9	04 23 10 044 09 90	fixing set	1.00	2
1	27 702 980-00	Hand shower set for deck-mounted tub installation - Chrome	1.00	10
4	90 11 70 013 00-00	spout	1.00	10