



9,000 BTU/H SLIM DUCTED IDU

SUBMITTAL COVER SHEET

PROJECT NAME _____

LOCATION _____


ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

REFERENCE _____

SUBMITTED BY _____ DATE _____

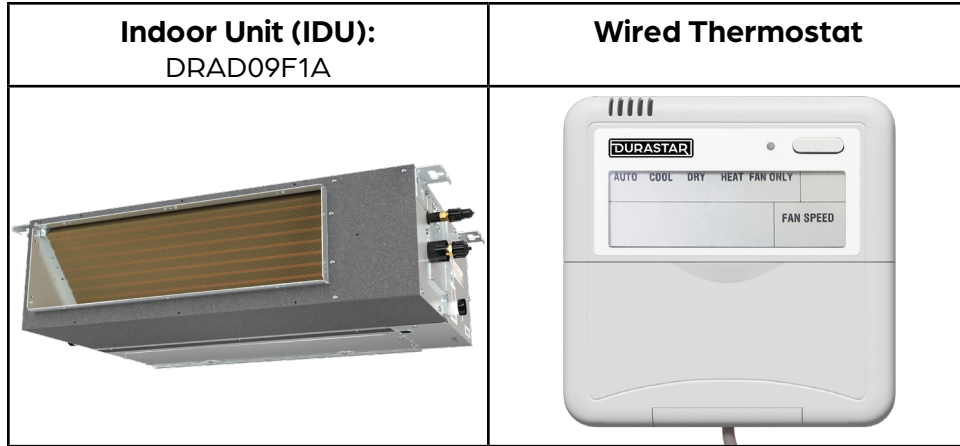

| CAPACITIES | | |
|---------------------------|-------|-------|
| Cooling Capacity (BTU/hr) | Rated | 9000 |
| Heating Capacity (BTU/hr) | Rated | 10000 |

| ELECTRICAL DATA | |
|-------------------------|--------------------------|
| Voltage/Phase/Frequency | 208-230V, 1 Phase, 60 Hz |

| LINE SET REQUIREMENTS | |
|-----------------------------------|-----------------|
| Connection Type | Flare |
| Liquid | Ø1/4" (Ø6.35mm) |
| Gas | Ø3/8" (Ø9.52mm) |
| Drain Port O.D. / Drain Hose I.D. | Ø1" (Ø25mm) |

| INDOOR UNIT DIMENSIONS | | |
|------------------------|-----------|-----------|
| Unit Dimensions | Width | 27 9/16" |
| | Depth | 19 15/16" |
| | Height | 7 7/8" |
| Carton Dimensions | Width | 33 7/8" |
| | Depth | 21 1/4" |
| | Height | 11 1/4" |
| Net Weight | 39.0 lbs. | |
| Gross Weight | 50.0 lbs. | |

| INDOOR UNIT FAN DATA | | |
|-------------------------|--------|-----|
| Air Flow (CFM) | Low | 177 |
| | Medium | 283 |
| | High | 353 |
| Type | DC | |
| RLA | 1.11 | |
| Sound Pressure (dB(A)) | Low | 32 |
| | Medium | 35 |
| | High | 38 |
| Static Pressure (in wg) | 0-0.16 | |

- PRODUCT FEATURES**
- Wired Thermostat Included
 - Auto Restart
 - Auto Changeover
 - 24-hour Timer




Specifications are subject to change without notice.
 © 2021 Ferguson Enterprises LLC
 www.durastar.com




9,000 BTU/H SLIM DUCTED IDU

DIMENSIONS - DRAD09F1A


Unit and air outlet dimensions

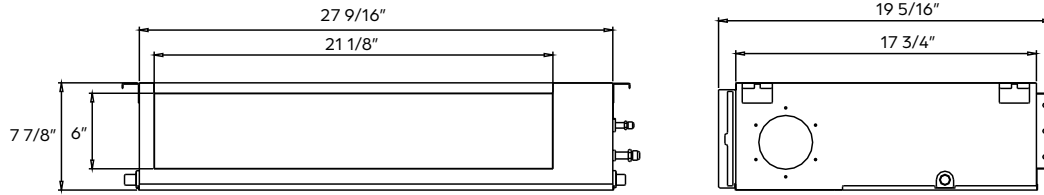


Air inlet dimensions

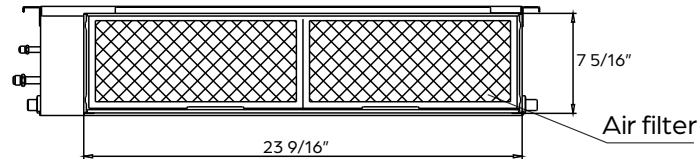

Mounting dimensions for ceiling bolts

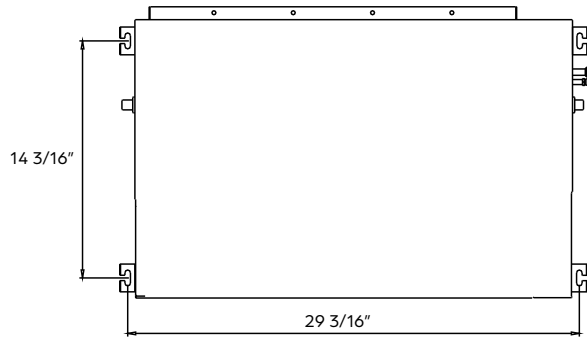

Installation clearances

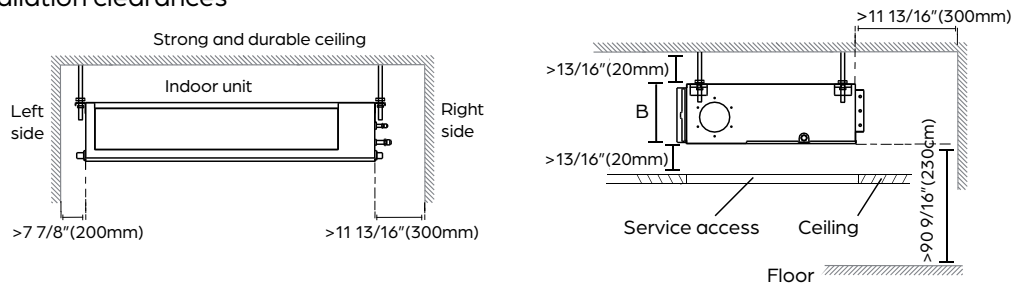

Maintenance access panel

