



SINGLE-ZONE AHRI RATINGS CHART

Type	BTU/h	Model Number	Standard	Standard	Standard	Standard	Sirius Heat™	Sirius Heat™	Sirius Heat™	Sirius Heat™
			DRA1U09S1B	DRA1U12S1B	DRA1U18S1B	DRA1U24S1B	DRA1H09S1A	DRA1H12S1A	DRA1H18S1A	DRA1H24S1A
Wall Mounted	6,000	DRAW06F1B	210568097							
	9,000	DRAW09F1B	207787130				210568098			
	12,000	DRAW12F1B		207787131				210568099		
	18,000	DRAW18F1B			207787132				210568100	
	24,000	DRAW24F1B				207787133				210568101
Ceiling Cassette	9,000	DRAC09F1A	207787134				210568111			
	12,000	DRAC12F1A		207787136				210568112		
	18,000	DRAC18F1A			207787140				210568113	
	24,000	DRAC24F1B				207787144				210568114
One-way Cassette	6,000	DRAL06F1A	210568102							
	9,000	DRAL09F1A	210568106				210568103			
	12,000	DRAL12F1A		210568107				210568104		
	18,000	DRAL18F1A			210568108				210568105	
Slim Ducted	9,000	DRAD09F1A	207787135				210568115			
	12,000	DRAD12F1A		207787137				210568116		
	18,000	DRAD18F1A			207787141				210568117	
	24,000	DRAD24F1A				207787145				210568118
Floor/Ceiling Flex	18,000	DRAF18F1A			207787142				210568119	
	24,000	DRAF24F1A				207787146				210568120
Floor Mounted	12,000	DRAS12F1B		207787139				211497017		



SIRIUS HEAT™ MULTI-ZONE AHRI RATINGS

SIRIUS HEAT™

	BTU/h	Model Number	Configuration	SEER2	AHRI #
	18,000	DRA2H18M1A	Ducted	19.00	210568212
			Mixed	19.75	210568213
			Non-Ducted	20.50	210568211
	28,000	DRA3H28M1A	Ducted	20.00	210568215
			Mixed	21.30	210568216
			Non-Ducted	22.60	210568214
	36,000	DRA4H36M1A	Ducted	19.00	210568218
			Mixed	19.50	210568219
			Non-Ducted	20.00	210568217
	48,000	DRA5H48M1A	Ducted	20.90	210568221
			Mixed	21.05	210568222
			Non-Ducted	21.20	210568220
	55,000	DRA5H55M1A	Ducted	18.80	210568224
			Mixed	19.40	210568225
			Non-Ducted	20.00	210568223

Specifications are subject to change without notice.

© 2023 Ferguson Enterprises LLC

www.durastar.com



STANDARD MULTI-ZONE AHRI RATINGS

	BTU/h	Model Number	Configuration	SEER2	AHRI #
	18,000	DRA2U18M1B	Ducted	19.00	207787172
			Mixed	20.00	207787173
			Non-Ducted	21.00	207787171
	28,000	DRA3U28M1B	Ducted	21.00	207787175
			Mixed	22.25	207787176
			Non-Ducted	23.50	207787174
	36,000	DRA4U36M1B	Ducted	20.00	207787178
			Mixed	21.55	207787179
			Non-Ducted	23.10	207787177
	48,000	DRA5U48M1B	Ducted	20.50	207787181
			Mixed	20.80	207787182
			Non-Ducted	21.10	207787180
	55,000	DRA5U55M1B	Ducted	19.00	210568209
			Mixed	19.60	210568210
			Non-Ducted	20.20	210568208

Specifications are subject to change without notice.

© 2023 Ferguson Enterprises LLC

www.durastar.com



SUPPORTED MULTI-ZONE MATCHES - CHART 1/3

Outdoor Models	2-Zone	3-Zone	4-Zone	5-Zone
DRA2U18M1B DRA2H18M1A	6+6			
	6+9			
	6+12			
	9+9			
	9+12			
DRA3U28M1B DRA3H28M1A	6+12	6+6+6		
	6+18	6+6+9		
	6+24	6+6+12		
	9+9	6+6+18		
	9+12	6+9+9		
	9+18	6+9+12		
	12+12	6+9+18		
	12+18	6+12+12		
	18+18	6+12+18		
		9+9+9		
		9+9+12		
		9+9+18		
DRA4U36M1B DRA4H36M1A	6+18	6+6+12	6+6+6+6	
	6+24	6+6+18	6+6+6+9	
	9+9	6+6+24	6+6+6+12	
	9+12	6+9+9	6+6+6+18	
	9+18	6+9+12	6+6+6+24	
	9+24	6+9+18	6+6+9+9	
	12+12	6+9+24	6+6+9+12	
	12+18	6+12+12	6+6+9+18	
	12+24	6+12+18	6+6+9+24	
	18+18	6+12+24	6+6+12+12	
	18+18	6+18+18	6+6+12+18	
		9+9+9	6+6+12+24	
		9+9+12	6+6+18+18	
		9+9+18	6+9+9+9	
		9+9+24	6+9+9+12	
		9+12+12	6+9+9+18	
		9+12+18	6+9+9+24	
		9+18+18	6+9+12+18	
		12+12+12	6+12+12+12	
		12+12+18	6+12+12+18	
		12+18+18	9+9+9+9	
		12+12+24	9+9+9+12	
			9+9+9+18	
			9+9+12+12	
			9+9+12+18	
			9+12+12+12	
			12+12+12+12	
	DRA5U48M1B DRA5H48M1A	9+24	9+9+18	6+6+6+18
12+24		9+9+24	6+6+6+24	6+6+6+6+12
18+18		9+12+12	6+6+9+12	6+6+6+6+18
18+24		9+12+18	6+6+9+18	6+6+6+6+24
24+24		9+12+24	6+6+9+24	6+6+6+9+12
		9+18+18	6+6+12+12	6+6+6+12+12
		9+18+24	6+6+12+18	6+6+6+12+18
		9+24+24	6+6+12+24	6+6+6+12+24
		12+12+12	6+6+18+18	6+6+6+18+18
		12+12+18	6+6+18+24	6+6+6+18+24
		12+12+24	6+9+9+9	6+9+9+9+9
		12+18+18	6+9+9+12	6+9+9+9+12
		12+18+24	6+9+9+18	6+9+9+9+18
		12+24+24	6+9+9+24	6+9+9+9+24
		18+18+18	6+9+12+12	6+9+9+12+12
		18+18+24	6+9+12+18	6+9+9+12+18



NOTE

The nominal values above represent indoor unit cooling capacity BTUs per hour in the 1,000s. Example: 9 = 9,000 BTU/h. If the total indoor unit load exceeds the nominal capacity of the outdoor unit, the practical output capacity of each indoor unit will be correspondingly reduced. This situation is very evident during heating mode.



SUPPORTED MULTI-ZONE MATCHES - CHART 3/3

Outdoor Models	2-Zone	3-Zone	4-Zone	5-Zone
DRA5U55M1B DRA5H55M1A cont.			9+9+18+24	6+9+9+18+24
			9+12+12+12	6+9+9+24+24
			9+12+12+18	6+9+12+12+12
			9+12+12+24	6+9+12+12+18
			9+12+18+18	6+9+12+12+24
			9+12+18+24	6+9+12+18+18
			9+18+18+18	6+9+12+18+24
			9+18+18+24	6+12+12+12+12
			12+12+12+12	6+12+12+12+18
			12+12+12+18	6+12+12+12+24
			12+12+12+24	9+9+9+9+9
			12+12+18+18	9+9+9+9+12
			18+18+18+18	9+9+9+9+18
				9+9+9+9+24
				9+9+9+12+12
				9+9+9+12+18
				9+9+9+18+18
				9+9+9+12+24
				9+9+12+12+12
				9+9+12+12+18
			9+12+12+12+12	
			9+12+12+12+18	
			9+12+12+12+24	
			9+12+12+18+18	
			12+12+12+12+12	
			12+12+12+12+18	
			12+12+12+12+24	
			12+12+12+18+18	




NOTE

The nominal values above represent indoor unit cooling capacity BTUs per hour in the 1,000s. Example: 9 = 9,000 BTU/h. If the total indoor unit load exceeds the nominal capacity of the outdoor unit, the practical output capacity of each indoor unit will be correspondingly reduced. This situation is very evident during heating mode.



MINI-SPLIT INDOOR UNIT SKU NOMENCLATURE

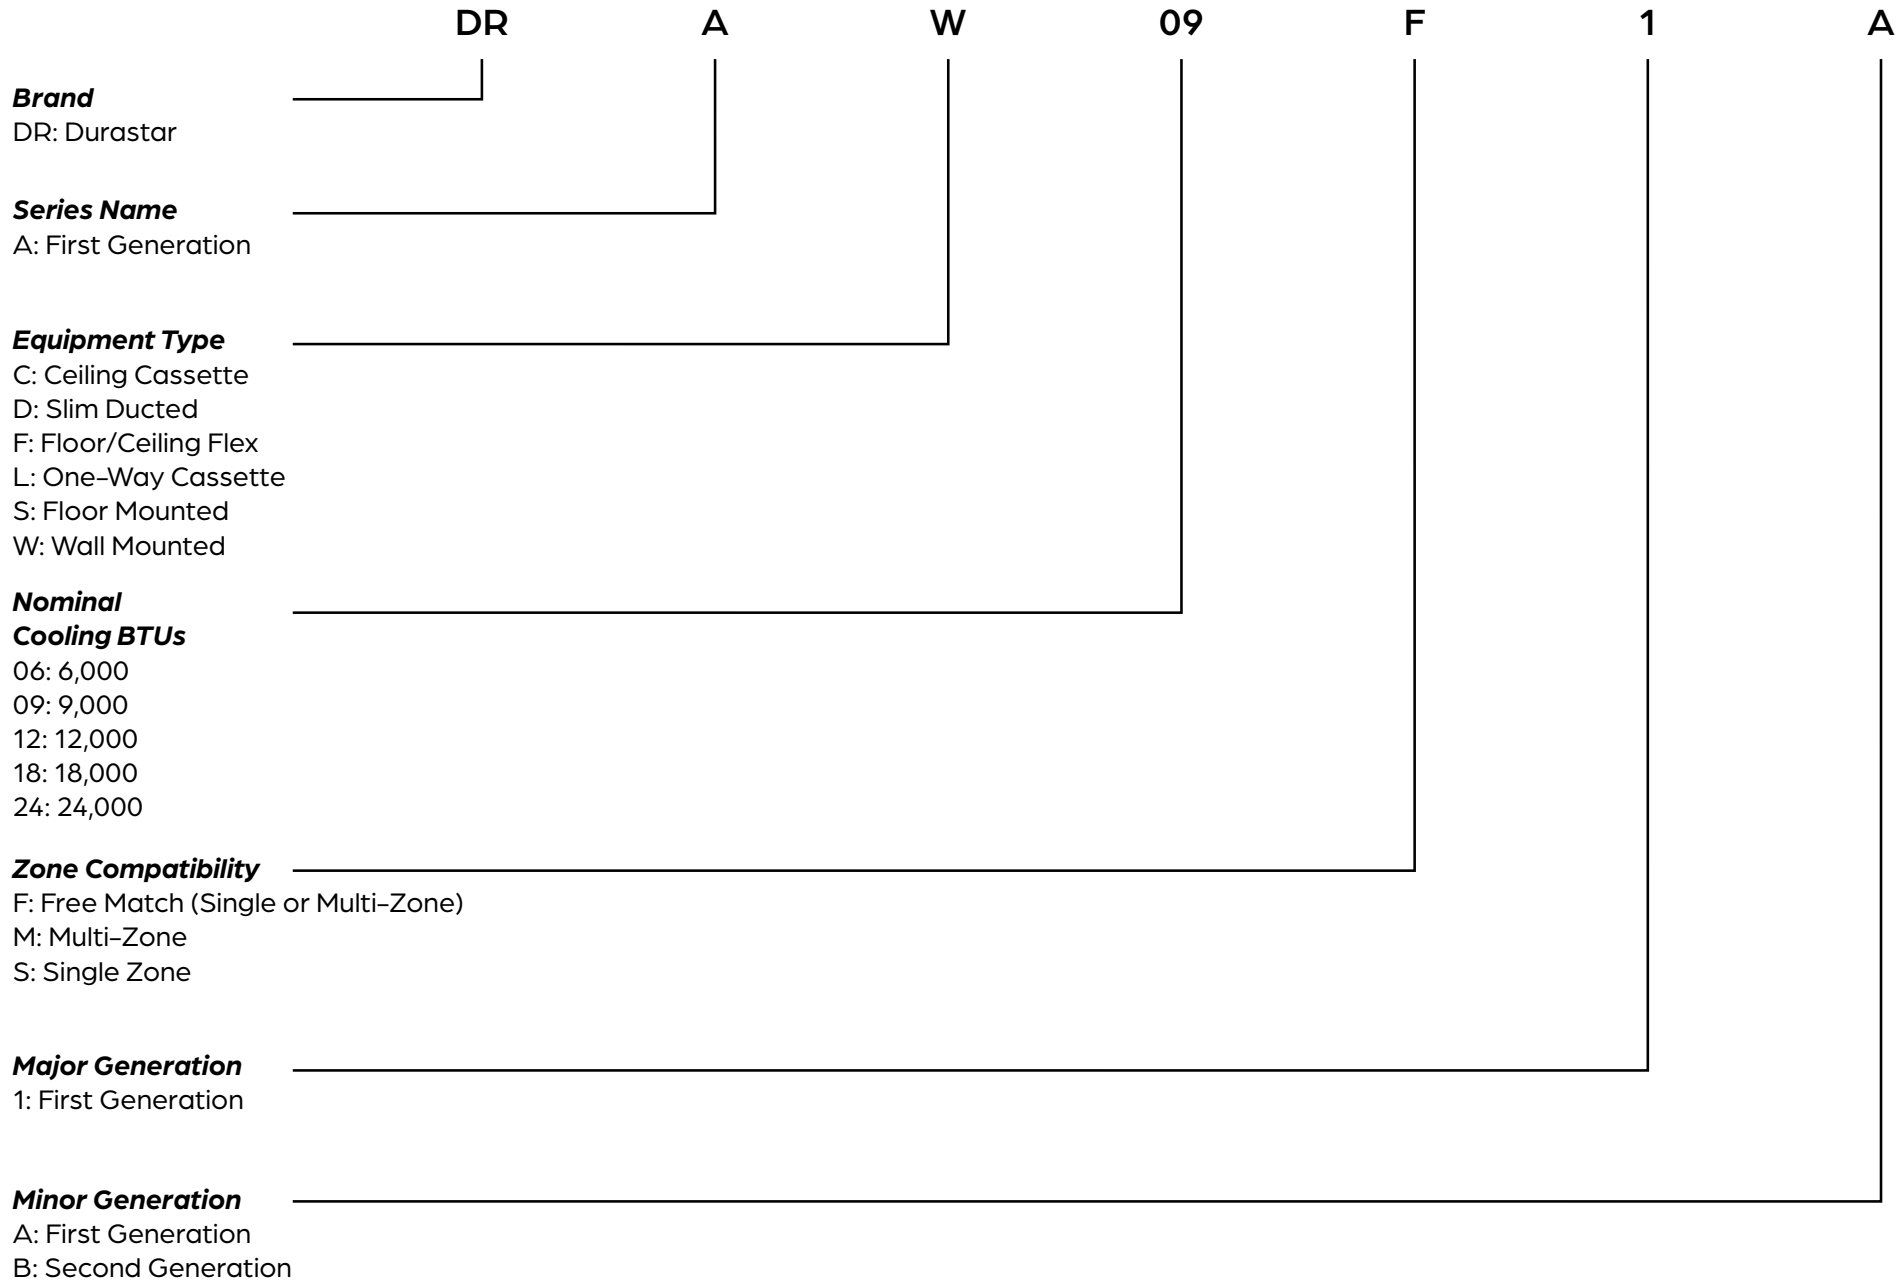

Specifications are subject to change without notice.
© 2023 Ferguson Enterprises LLC
www.durastar.com



MINI-SPLIT OUTDOOR UNIT SKU NOMENCLATURE

DR

A

1

U

09

S

1

A

Brand
DR: Durastar

Series Name
A: First Generation

of Supported IDU Connections

Equipment Type
U: Outdoor Heat Pump
H: Sirius Heat

Nominal Capacity
09: 9,000
12: 12,000
18: 18,000
24: 24,000
28: 28,000
36: 36,000
48: 48,000
55: 55,000

Zone Compatibility
F: Free Match (Single or Multi-Zone)
M: Multi-Zone
S: Single Zone

Major Generation
1: First Generation

Minor Generation
A: First Generation
B: Second Generation