


**ME by Starck Toilet floorstanding for SensoWash® # 216959..92**  
/ 216959..92

| < 14 5/8" Inch > |

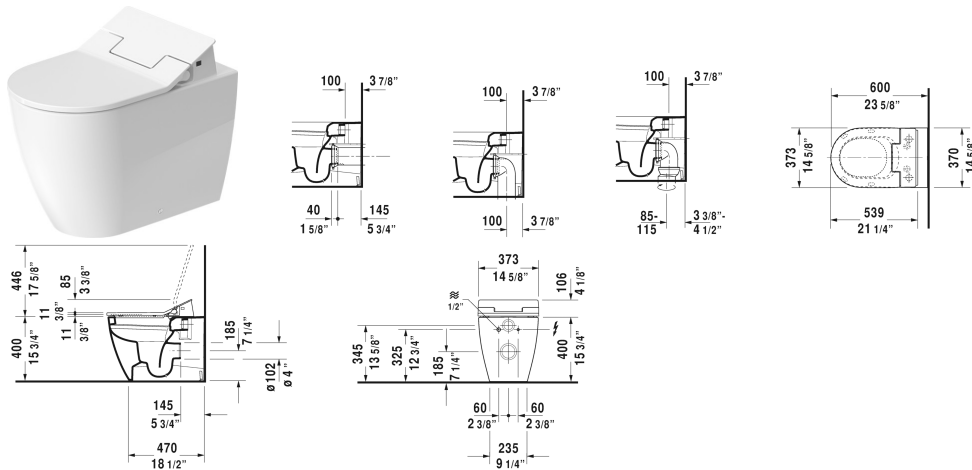

Toilet floorstanding for SensoWash®	Dimension	Weight	Order number
back-to-wall, washdown model, hardware included, horizontal outlet, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, cUPC® listed*, WaterSense® listed			
<b>Colors</b>			
00 White 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)			
<b>Variant</b>			
♣ 1.28/0.8 gpf, ADA height	14 5/8" x 23 5/8" Inch	63.9 lb	216959..92
♣ 1.28/0.8 gpf, ADA height	14 5/8" x 23 5/8" Inch	63.9 lb	216959..92
<b>Infobox</b>			
In-wall tank and actuator plate are required for installation, * Complies with following standards: ASME A112.19.2/CSA B45.1 and ASME A112.19.14, 1/2" drop-ear elbow is necessary for installation (not included with delivery)			
Sanitary ceramics with the special WonderGliss surface finish will remain clean and attractive-looking for a long time to come. When ordering WonderGliss please add a "1" as eleventh digit to the model number.			
Connecting set in combination with SensoWash shower-toilet seat			100691
Pre-installation set in combination with SensoWash, for in-wall carrier with horizontal support without shower toilet pre-installation/conduit pipe			005072
Vario connector set incl. offset	Ø 4 3/8" Inch	3.3 lb	001422

**ME by Starck Toilet floorstanding for SensoWash® # 216959..92**  
/ 216959..92

|< 14 5/8" Inch >|

Suitable products	
SensoWash® Slim shower-toilet seat for ME by Starck, Starck 2, Starck 3 and Darling New* Rear-, Lady- and Comfortwash, with slow close, night light, remote control included, locking function via remote control, self-cleaning wand, on / off-button, with concealed connections, automatic drainage in periods of prolonged disuse, 14 3/4" x 21 1/4" Inch	611000

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.*