


DuraStyle One-Piece toilet for SensoWash® # 215751..05 / 215751..85

|< 14 5/8" Inch >|



One-Piece toilet for SensoWash®	Dimension	Weight	Order number
only in combination with SensoWash, syphonic, 12" rough-in, connecting elements for SensoWash with concealed connections included, vertical outlet, cUPC® listed*			
Colors			
00 White 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)			
Variant			
♦ 1.32/0.92 gpf, with dual flush piston valve, top flush	14 5/8" x 28 3/8" Inch	121.3 lb	21575105
♦ 1.28 gpf, with single flush piston valve, top flush	14 5/8" x 28 3/8" Inch	121.3 lb	21575185
Mounting set for One-Piece and Two-Piece toilets, outlet 3/8" -	17 2//II In ah	1116	001/17
male thread, wall connection 1/2" - female thread, 1/2", North American version	17 3/4" Inch	1.1 lb	001417
Suitable products			

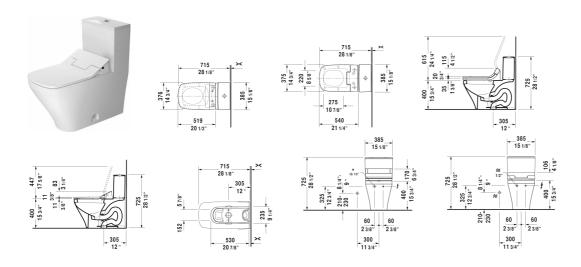

DuraStyle One-Piece toilet for SensoWash® # 215751..05 / 215751..85

|< 14 5/8" Inch >|


SensoWash® Slim shower-toilet seat for DuraStyle* rear-, front and oscillating wash, with slow close, night light, remote control included, locking function via remote control, self-cleaning wand, on / off-button, with concealed connections, automatic drainage in periods of prolonged disuse, 14 3/4" x 21 1/4" Inch	14 3/4" x 21 1/4" Inch	611200

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.



SensoWash® Slim SensoWash® Slim shower-toilet seat for DuraStyle* # 611200001001300

|< 14 3/4" Inch >|

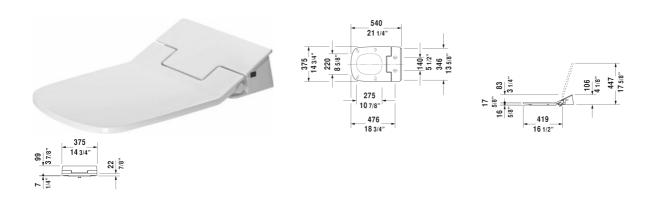

SensoWash® Slim shower-toilet seat for DuraStyle*	Dimension	Weight	Order number
rear-, front and oscillating wash, with slow close, night light, remote control included, locking function via remote control, self-cleaning wand, on / off-button, with concealed connections automatic drainage in periods of prolonged disuse	,		
Colors			
00 White			
Variant			
AC 100-120V, 50-60 Hz, individual adjustment of water temperature, spray wand position and water spray intensity, seat and lid easily removable with one hand	14 3/4" x 21 1/4" Inch	12.1 lb	611200001001300
Infobox			
Install a water water softener with water hardness ≥ 2.4 mmol,	/l (≥ 14° dH or 24° fH).		
Suitable products			
One-Piece toilet for SensoWash® only in combination with SensoWash, syphonic, 12" rough-in, connecting elements for SensoWash with concealed connections included, vertical outlet cUPC® listed*, 14 5/8" x 28 3/8" Inch	. 14 5/8" x 28 3/8" Inch		215751
Toilet wall-mounted for SensoWash® washdown model, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, Durafix included, cUPC® listed*, 14 5/8" X 24 3/8" Inch	14 5/8" X 24 3/8" Inch		253759
Toilet close-coupled for SensoWash® (without tank), only in combination with SensoWash, washdown model, outlet for various connector set, for horizontal and vertical outlet, length adjustable from 2 3/4" - 6 3/4", and vario connecting bend, vertical outlet from 6 3/4" - 8 5/8", connecting elements for SensoWash with concealed connections included, hardware included, cUPC® listed*, 14 5/8" x 27 1/2" Inch	14 5/8" x 27 1/2" Inch		215659



SensoWash® Slim SensoWash® Slim shower-toilet seat for DuraStyle* # 611200001001300

|< 14 3/4" Inch >|

Two-piece toilet for SensoWash® (without tank), syphonic, only in combination with SensoWash, 12" rough-in, connecting elements for SensoWash with concealed connections included, vertical outlet, cUPC® listed*, 14 1/8" x 27 1/2" Inch	14 1/8" x 27 1/2" Inch	216051
Toilet wall-mounted Duravit Rimless for SensoWash® rimless, washdown model, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, Durafix included, cUPC® listed*, 14 5/8" X 24 3/8" Inch	14 5/8" X 24 3/8" Inch	254259

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.