


SensoWash® i Bidet Toilet # 620000011401310 / 620000011401326

| < 14 3/8 " > |

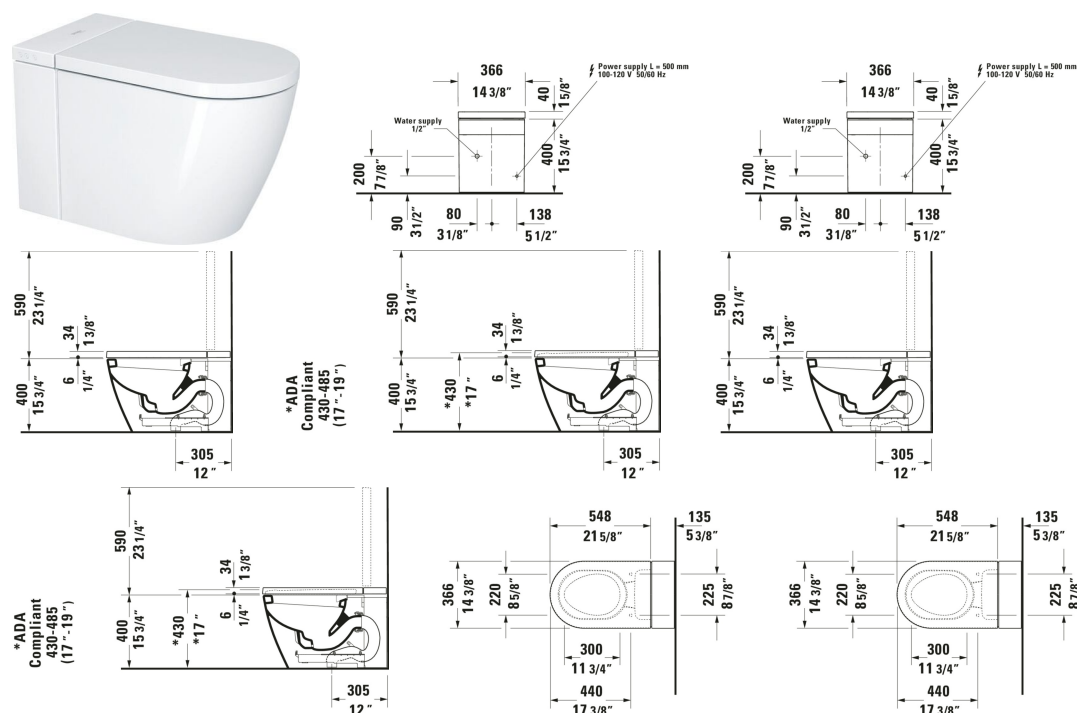

Bidet Toilet	Dimension	Weight	Order number
Floorstanding, Siphonic, Outlet vertical, Electricity connections Concealed, Lid actuation: Touchless, At the touch of a button, Automatic, Rearwash, Frontwash, Pulsing shower spray: Oscillating, Warm air dryer, Heated seat, Decalcification function, Self-cleaning function, Decalcification function, Holiday mode, Night light			
Colors			
00 White High Gloss			
Variant			
Flush water quantity: 1.28/0.8 GPF, HygieneGlaze, White, Seat material type: Thermoplastic, Lid material type: Thermoplastic, Lid actuation: Manual, Water position adjustment: 5 Steps, Number of spray intensity options: 3 Steps, Remote control, App, Operation type: Remote control, App, Energy saving mode: Adjustable, Connection voltage: 100 - 120 V, Min. frequency: 50 Hz, ADA: Yes, cUPC listed: Yes	14 3/8 "x26 7/8 "	110.231 lb	620000011401310
Flush water quantity: 1.28/0.8 GPF, HygieneGlaze, White, Seat material type: Thermoplastic, Lid material type: Thermoplastic, Water position adjustment: 5 Steps, Number of spray intensity options: 3 Steps, Number of user profiles: 2, Odor extraction, Number of user profiles: 2, Odor extraction, Energy saving mode: Automatic, Adjustable, Intelligent, Connection voltage: 100 - 120 V, Min. frequency: 50 Hz	15 5/8 "x27 3/4 "	105.822 lb	620000011401326

**SensoWash® i Bidet Toilet # 620000011401310 /
620000011401326**

|< 14 3/8 " >|

Text for invitation of tenders

Duravit SensoWash i Bidet Toilet, Designer: Philippe Starck, Floorstanding, Flush system: Washdown model, Decalcification function: Integrated, Rearwash, Remote control backlighting, Frontwash, Night light, Pulsing shower spray: Oscillating, Self-cleaning function, Heated seat, Warm air dryer, Shower head material: Stainless Steel, Removable shower head, Shower nozzle material: Stainless Steel, Outlet: vertical, Min. incoming water pressure: 1.015266 psi, Cable length: 19 5/8 ", Max. water hardness: 2.4 mmol/L, Protection type: IPX4, Electricity connections: Concealed, Includes remote control, Dimensions (Width / Length x Depth/width x Height): 14 3/8 " x 26 7/8 " x 17 3/8 "

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.